


ML OPS Data Pipeline


Tejas Kapasi - ML C63

KapasiTejas@gmail.com

Starting Airflow Server and Airflow Scheduler

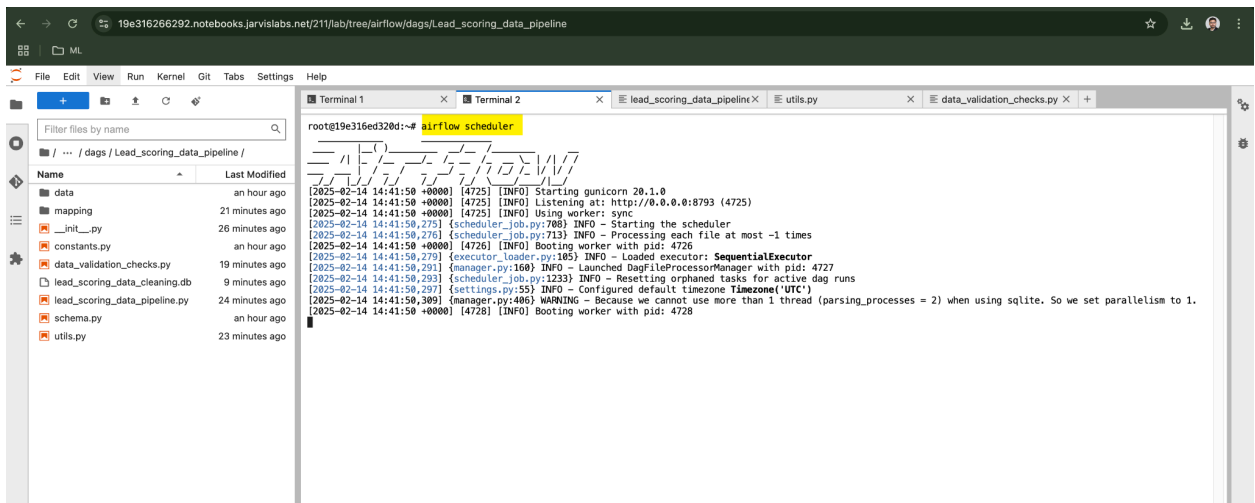

The screenshot shows a JupyterLab interface with a file explorer on the left and a terminal window on the right. The file explorer displays the contents of the directory `/ ... / dags / Lead_scoring_data_pipeline /`, including files like `data`, `mapping`, `__init__.py`, `constants.py`, `data_validation_checks.py`, `lead_scoring_data_cleaning.db`, `lead_scoring_data_pipeline.py`, `schema.py`, and `utils.py`. The terminal window, titled "Terminal 1", shows the command `airflow scheduler` being executed. The output displays the Airflow scheduler's startup logs, including the version (20.1.0), listening address (`http://0.0.0.0:8793`), and the start of the scheduler process. The logs also show the execution of the `airflow scheduler` command and the start of the `airflow scheduler` process.

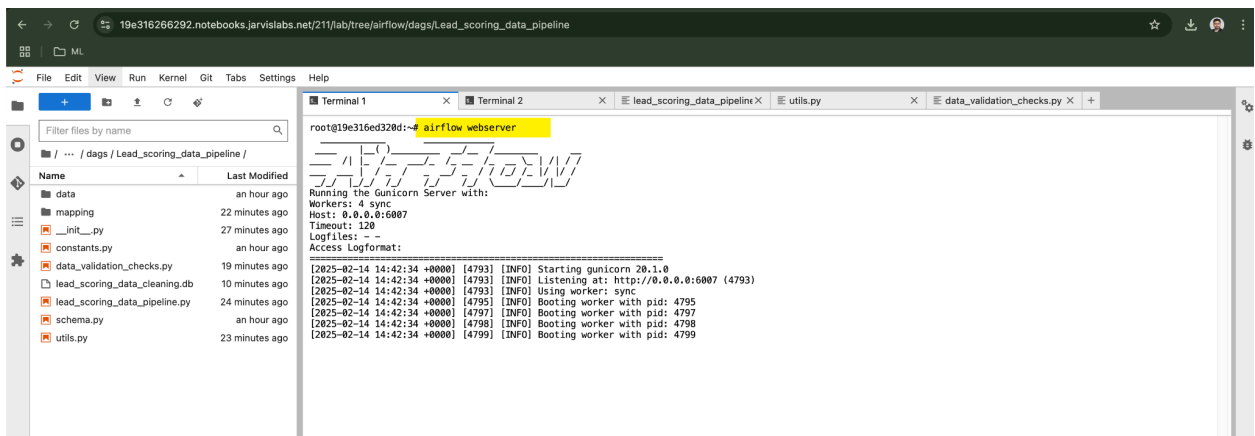

The screenshot shows a JupyterLab interface with a file explorer on the left and a terminal window on the right. The file explorer displays the contents of the directory `/ ... / dags / Lead_scoring_data_pipeline /`, including files like `data`, `mapping`, `__init__.py`, `constants.py`, `data_validation_checks.py`, `lead_scoring_data_cleaning.db`, `lead_scoring_data_pipeline.py`, `schema.py`, and `utils.py`. The terminal window, titled "Terminal 1", shows the command `airflow webserver` being executed. The output displays the Airflow webserver's startup logs, including the version (20.1.0), listening address (`http://0.0.0.0:8080`), and the start of the webserver process. The logs also show the execution of the `airflow webserver` command and the start of the `airflow webserver` process.

[illegible]

19e3162662922.notebooks.jarvislabs.net/home?status=active

Airflow DAGs Security Browse Admin Docs 14:34 UTC TK

Do not use **SQLite** as metadata DB in production – it should only be used for dev/testing. We recommend using Postgres or MySQL. [Click here](#) for more information.

Do not use **SequentialExecutor** in production. [Click here](#) for more information.

DAGs

All 33 Active 1 Paused 32 Filter DAGs by tag Search DAGs

DAG	Owner	Runs	Schedule	Last Run	Next Run	Recent Tasks	Actions	Links
 TK_Lead_Scoring_Data_Engineering_Pipeline	airflow		@daily	2025-02-14, 14:31:34	2025-02-14, 00:00:00		  ...	

« 1 » Showing 1-1 of 1 DAGs

Version: v2.3.3

19e3162662922.notebooks.jarvislabs.net/dags/TK_Lead_Scoring_Data_Engineering_Pipeline/grid

Airflow DAGs Security Browse Admin Docs 14:35 UTC TK

DAG: TK_Lead_Scoring_Data_Engineering_Pipeline

DAG to run data pipeline for lead scoring

Schedule: @daily Next Run: 2025-02-14, 00:00:00

Grid Graph Calendar Task Duration Task Tries Landing Times Gantt Details <> Code Audit Log

14/02/2025, 02:35:05 PM 25 All Run Types All Run States Clear Filters

Auto-refresh ☐

Duration

00:01:15

00:00:37

00:00:00

building_db
checking_raw_data_schema
loading_data
mapping_city_tier
mapping_categorical_vars
mapping_interactions
checking_model_inputs_schema

TK_Lead_Scoring_Data_Engineering_Pipeline

DAG Details

DAG Runs Summary

Total Runs Displayed	1
Total success	1
First Run Start	2025-02-14, 14:31:35 UTC
Last Run Start	2025-02-14, 14:31:35 UTC
Max Run Duration	00:01:15
Mean Run Duration	00:01:15
Min Run Duration	00:01:15

DAG Summary

Total Tasks	7
PythonOperators	7

Version: v2.3.3

