


DML → Undo.

```
DELETE FROM emp  
WHERE ename = 'King';
```



The row is marked as deleted.
It is not removed from the database.


```
SELECT * FROM emp;
```

Shows all the unmarked rows from the table.

```
TRUNCATE TABLE emp;
```

DDL.

TRUNCATE being the DDL command, it cannot be undone.
The data is deleted permanently.
We cannot use WHERE clause.
As the rows are deleted permanently, the file size is reduced.
TRUNCATE keeps the table structure intact.

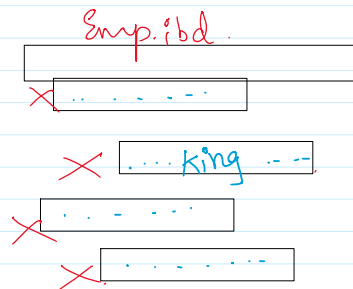

```
DESCRIBE emp;
```

Shows the table structure.

```
DROP TABLE emp;
```

The entire table is dropped with the data and the structure.

```
DESCRIBE emp;
```

-- error : table does not exist.

