


motion_cos — sorted ↓ highest first · 3 encoders · 95 % BCa CI

motion_cos — sorted ↓ highest first

↑ higher = better

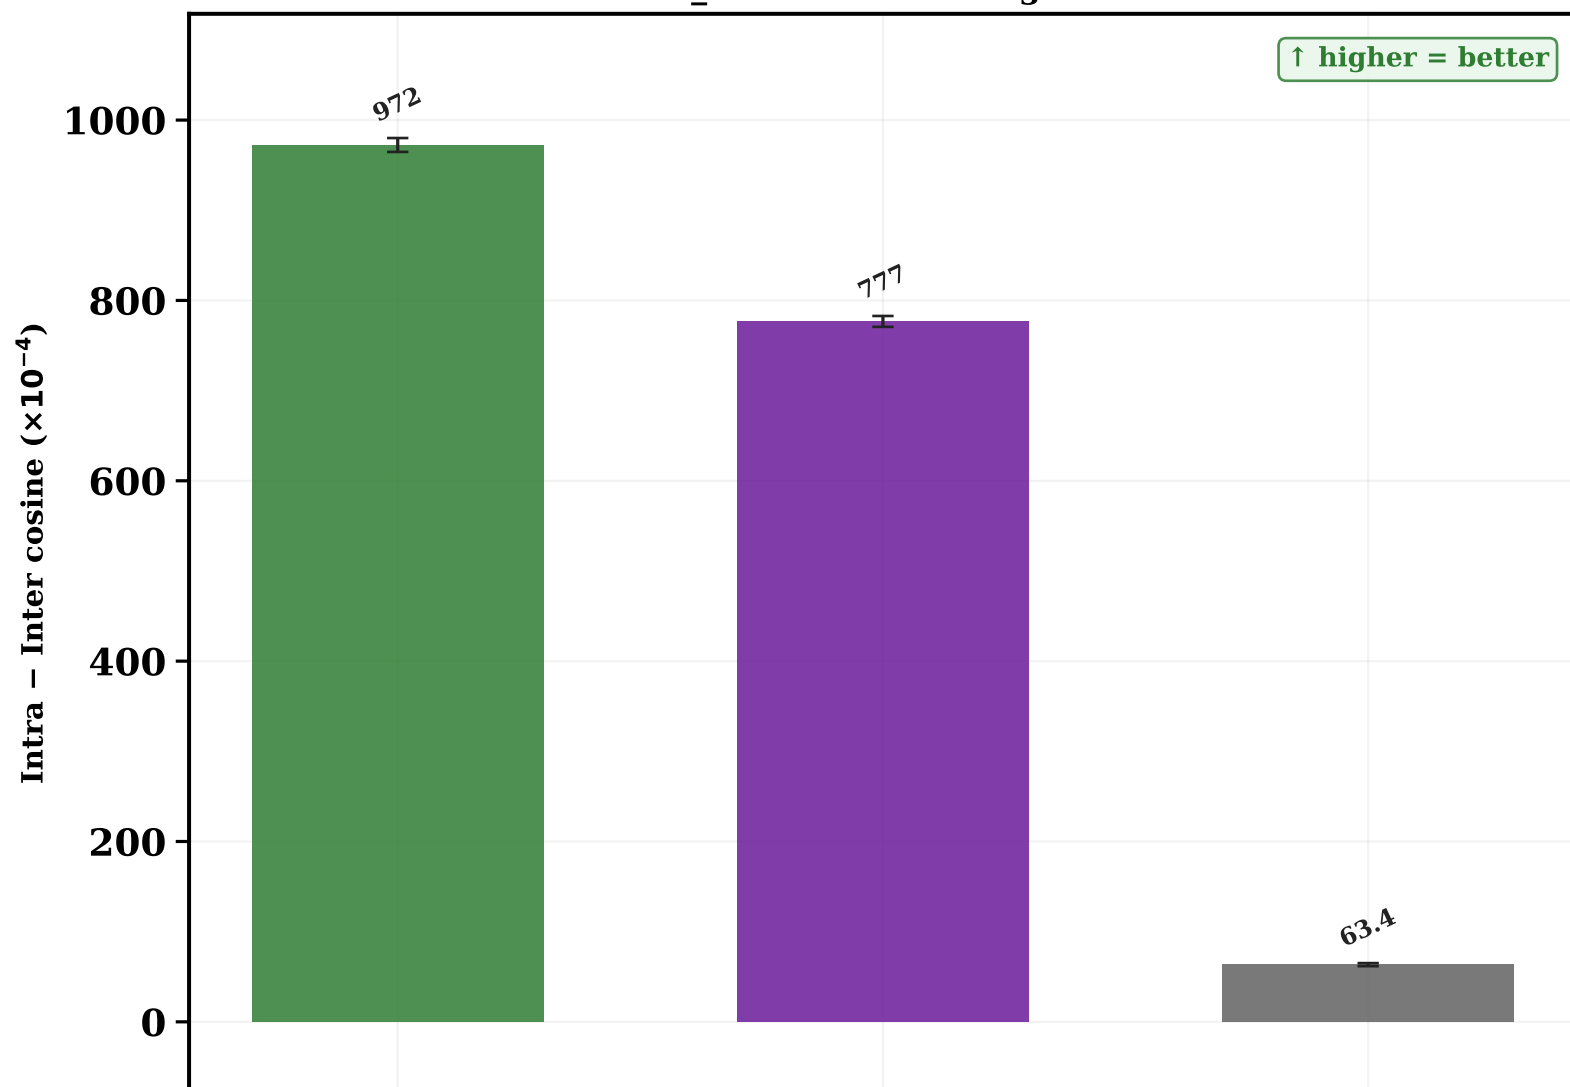

ViT-g surgical 3stage DI diheavy encoder

ViT-g peft lora encoder

ViT-g frozen

Same-class minus different-class cosine separation ($>0 \Rightarrow$ motion-semantic clustering).

Layman: e.g. do two clips of the SAME motion sit closer in feature space than two clips of DIFFERENT motions?

TEST split · whiskers = BCa 95 % CI from 10 K bootstrap.