


motion_cos — sorted ↓ highest first · 14 encoders · 95 % BCa CI

motion_cos — sorted ↓ highest first

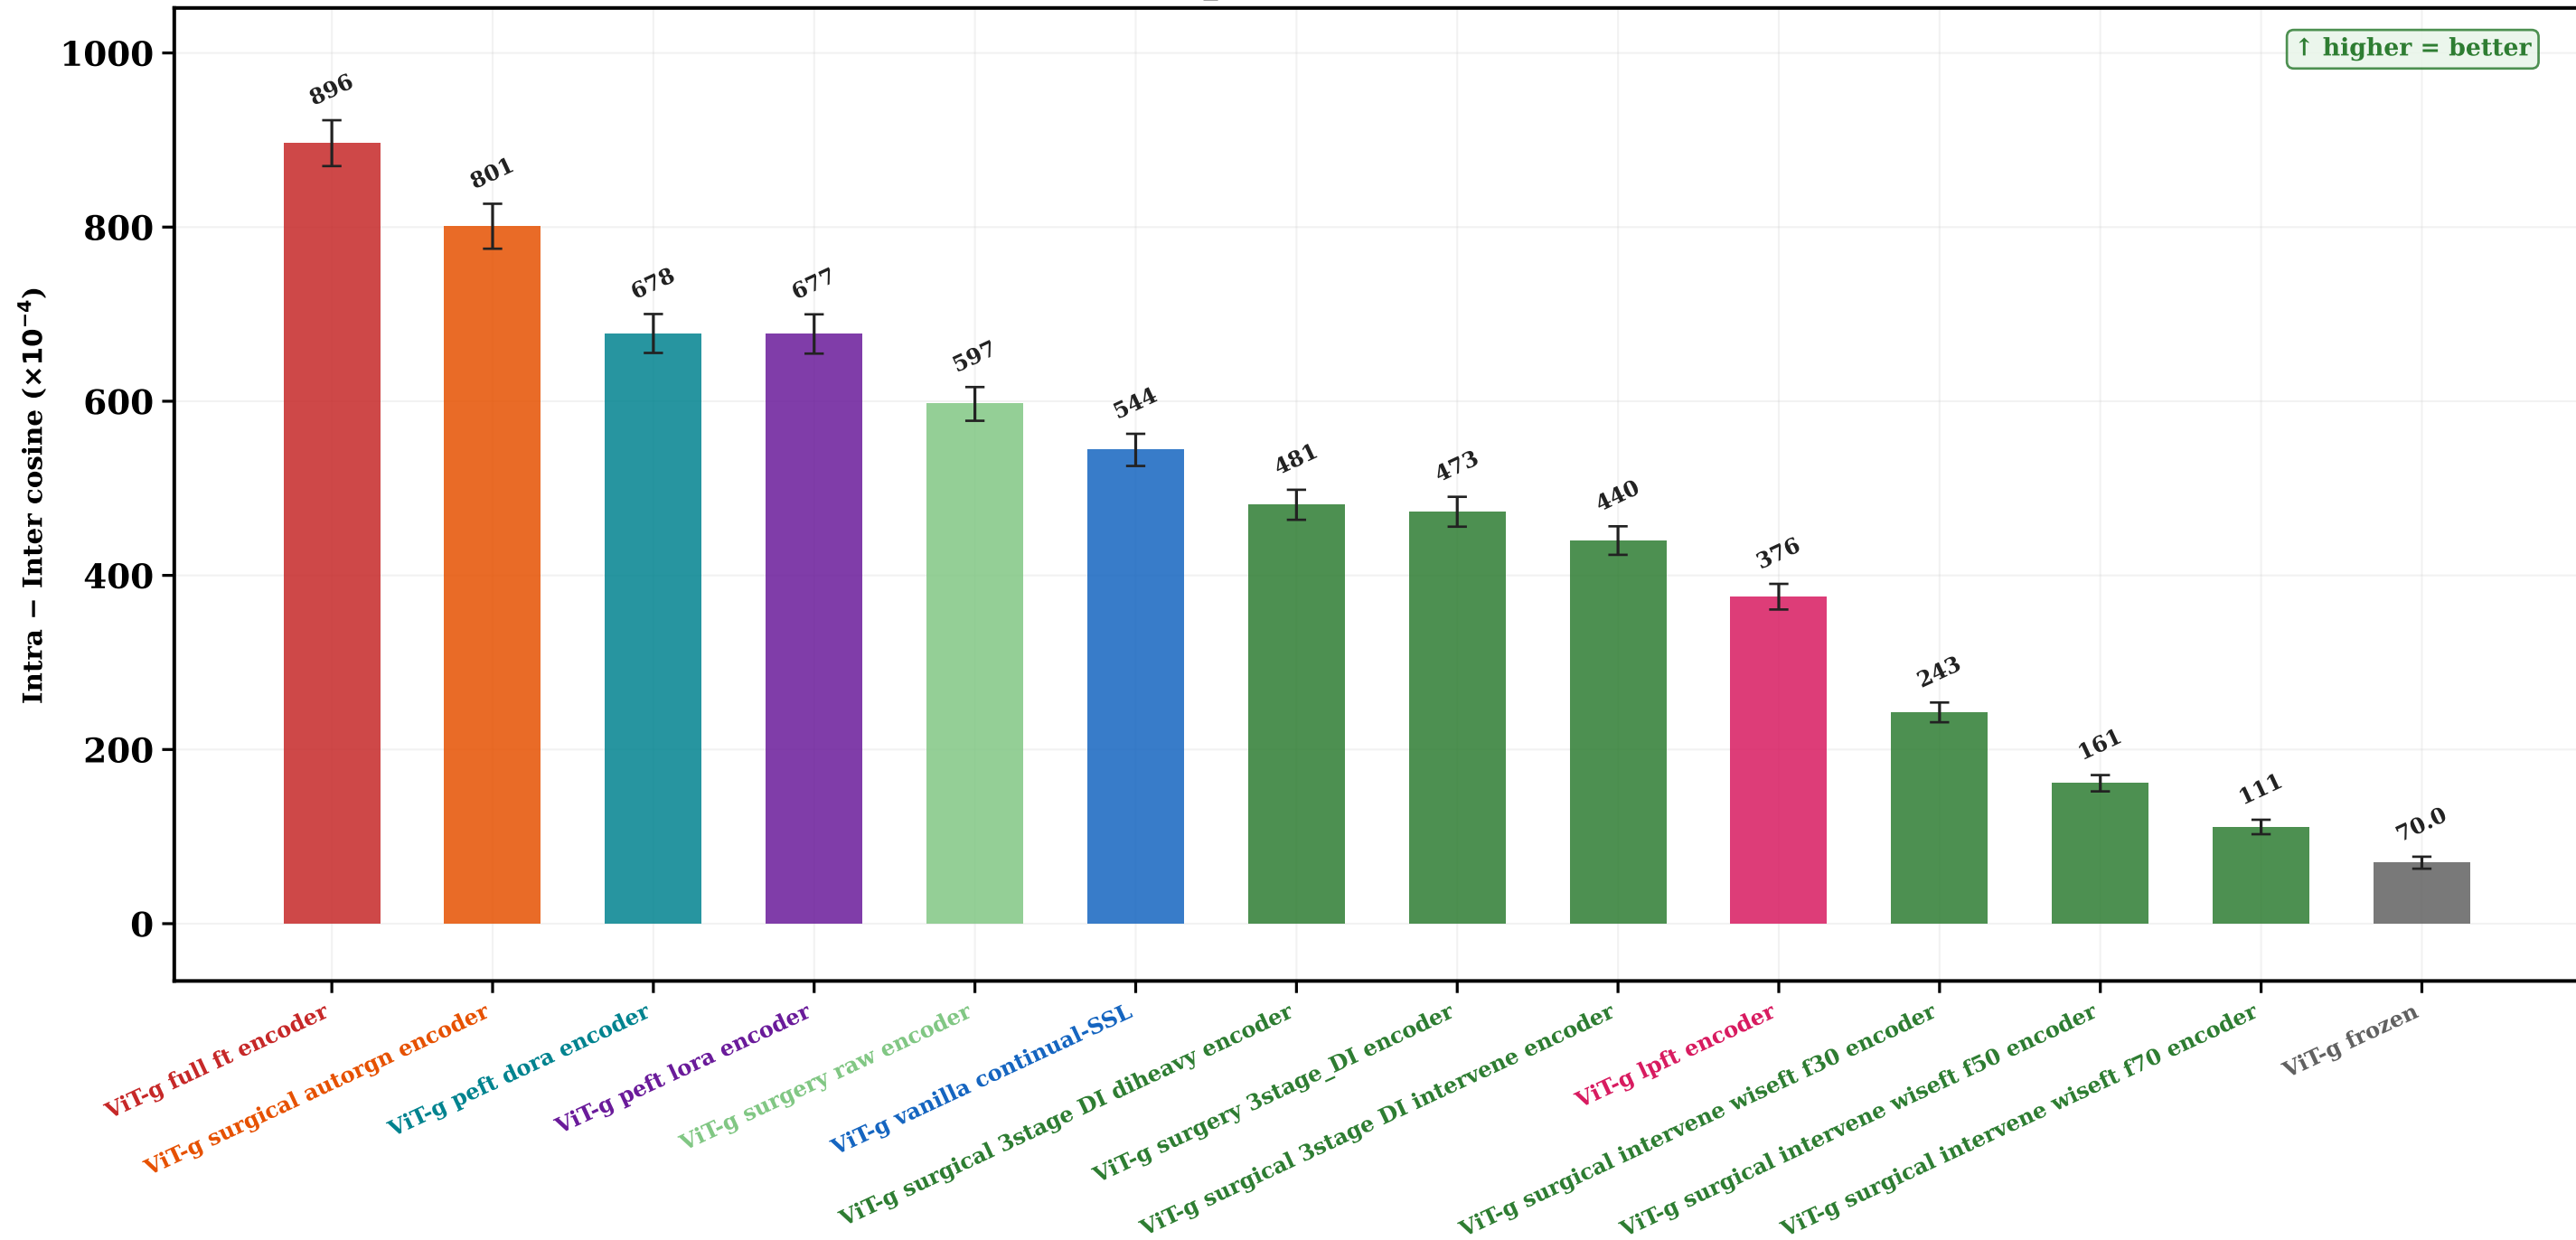

Same-class minus different-class cosine separation ($>0 \Rightarrow$ motion-semantic clustering).
Layman: e.g. do two clips of the SAME motion sit closer in feature space than two clips of DIFFERENT motions?
TEST split · whiskers = BCa 95 % CI from 10 K bootstrap.