




Code added-

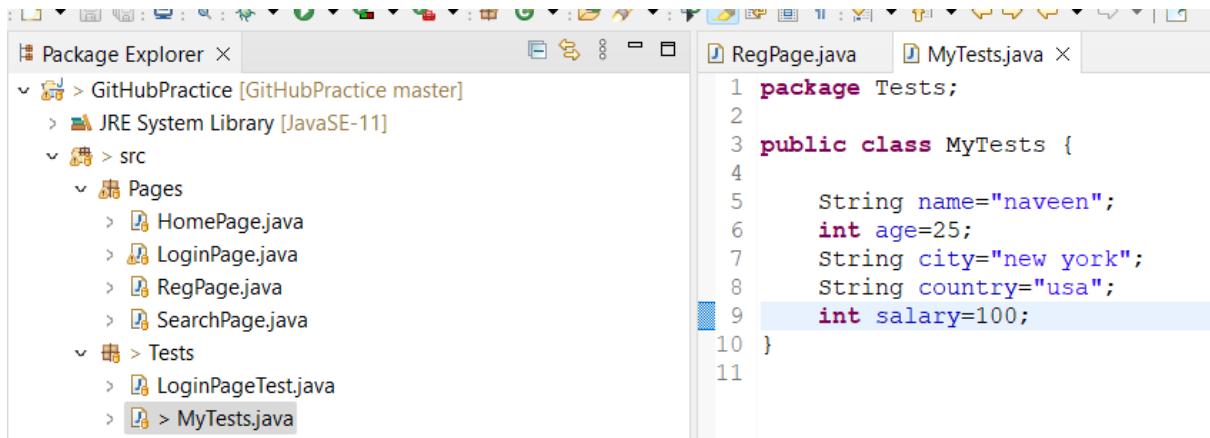

Diff –

Will say the difference between staged commit and the latest changes in working copy.

```
karan@LAPTOP-H560VJTV MINGW64 /e/Naveen_GIT_Training/Cucumber/GitHubPractice (master)
$ git diff
diff --git a/src/Tests/MyTests.java b/src/Tests/MyTests.java
index c375c99..7feb200 100644
--- a/src/Tests/MyTests.java
+++ b/src/Tests/MyTests.java
@@ -5,4 +5,6 @@ public class MyTests {
    String name="naveen";
    int age=25;
    String city="new york";
+   String country="usa";
+   int salary=100;
}

karan@LAPTOP-H560VJTV MINGW64 /e/Naveen_GIT_Training/Cucumber/GitHubPractice (master)
$
```

Another class code is changed-

```

karan@LAPTOP-H560VJTV MINGW64 /e/Naveen_GIT_Training/Cucumber/GitHubPractice (master)
$ git diff
diff --git a/src/Pages/RegPage.java b/src/Pages/RegPage.java
index 19dc631..387792c 100644
--- a/src/Pages/RegPage.java
+++ b/src/Pages/RegPage.java
@@ -3,5 +3,6 @@ package Pages;
 public class RegPage {
     int i=10;
+    String name="registration";
 }

diff --git a/src/Tests/MyTests.java b/src/Tests/MyTests.java
index c375c99..7feb200 100644
--- a/src/Tests/MyTests.java
+++ b/src/Tests/MyTests.java
@@ -5,4 +5,6 @@ public class MyTests {
     String name="naveen";
     int age=25;
     String city="new york";
+    String country="usa";
+    int salary=100;
}

karan@LAPTOP-H560VJTV MINGW64 /e/Naveen_GIT_Training/Cucumber/GitHubPractice (master)
$ |

```

To see the difference between two commits done-

```
MINGW64:/e/Naveen_GIT_Training/Cucumber/GitHubPractice
karan@LAPTOP-H560VJTV MINGW64 /e/Naveen_GIT_Training/Cucumber/GitHubPractice (master)
$ git log --oneline
a4d3eb0 (HEAD -> master) updated my test with city field
89d2131 updated my test class
0b7375b added some new files
87e6219 (origin/master) modified page classes
97efad9 added/updated/deleted files
9fe238f first commit

karan@LAPTOP-H560VJTV MINGW64 /e/Naveen_GIT_Training/Cucumber/GitHubPractice (master)
$ git diff 89d2131 a4d3eb0
diff --git a/src/Tests/MyTests.java b/src/Tests/MyTests.java
index a71a343..c375c99 100644
--- a/src/Tests/MyTests.java
+++ b/src/Tests/MyTests.java
@@ -4,4 +4,5 @@ public class MyTests {
        String name="naveen";
        int age=25;
+       String city="new york";
    }

karan@LAPTOP-H560VJTV MINGW64 /e/Naveen_GIT_Training/Cucumber/GitHubPractice (master)
$
```

We can see the difference between any commits, and we will come to know what has changed-

```
karan@LAPTOP-H560VJTV MINGW64 /e/Naveen_GIT_Training/Cucumber/GitHubPractice (master)
$ git log --oneline
a4d3eb0 (HEAD -> master) updated my test with city field
89d2131 updated my test class
0b7375b added some new files
87e6219 (origin/master) modified page classes
97efad9 added/updated/deleted files
9fe238f first commit

karan@LAPTOP-H560VJTV MINGW64 /e/Naveen_GIT_Training/Cucumber/GitHubPractice (master)
$ git diff 89d2131 a4d3eb0
diff --git a/src/Tests/MyTests.java b/src/Tests/MyTests.java
index a71a343..c375c99 100644
--- a/src/Tests/MyTests.java
+++ b/src/Tests/MyTests.java
@@ -4,4 +4,5 @@ public class MyTests {

    String name="naveen";
    int age=25;
+   String city="new york";
}

karan@LAPTOP-H560VJTV MINGW64 /e/Naveen_GIT_Training/Cucumber/GitHubPractice (master)
$ git diff 87e6219 89d2131
diff --git a/src/Pages/RegPage.java b/src/Pages/RegPage.java
new file mode 100644
index 0000000..19dc631
--- /dev/null
+++ b/src/Pages/RegPage.java
@@ -0,0 +1,7 @@
+package Pages;
+
+public class RegPage {
+    int i=10;
+
+}
diff --git a/src/Tests/MyTests.java b/src/Tests/MyTests.java
new file mode 100644
index 0000000..a71a343
--- /dev/null
+++ b/src/Tests/MyTests.java
@@ -0,0 +1,7 @@
+package Tests;
+
+public class MyTests {
+
    String name="naveen";
    int age=25;
}

karan@LAPTOP-H560VJTV MINGW64 /e/Naveen_GIT_Training/Cucumber/GitHubPractice (master)
$ |
```