


pavanpw-32

Tag playwright tests


how to run with tags-

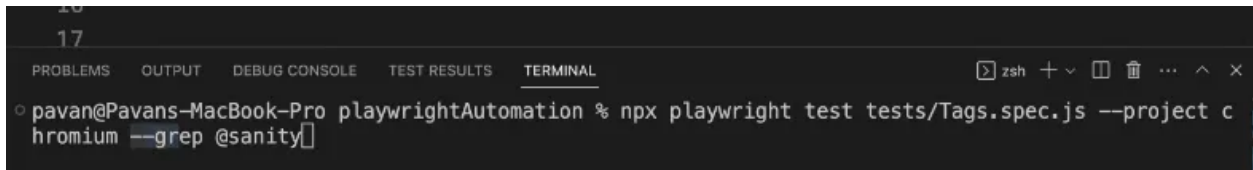

```
16  
17  
pavan@Pavans-MacBook-Pro playwrightAutomation % npx playwright test tests/Tags.spec.js --project c  
hromium --grep @sanity
```


specify multiple tags in run-

the order of the tags should match the ones mentioned in tests.

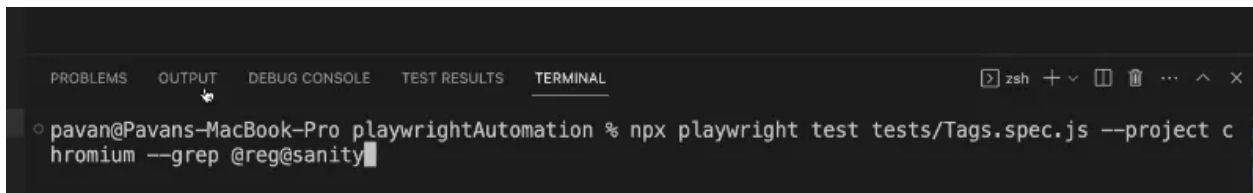

```
PROBLEMS OUTPUT DEBUG CONSOLE TEST RESULTS TERMINAL  
pavan@Pavans-MacBook-Pro playwrightAutomation % npx playwright test tests/Tags.spec.js --project c  
hromium --grep @reg@sanity
```

to run only specific tag and exclude other tag-

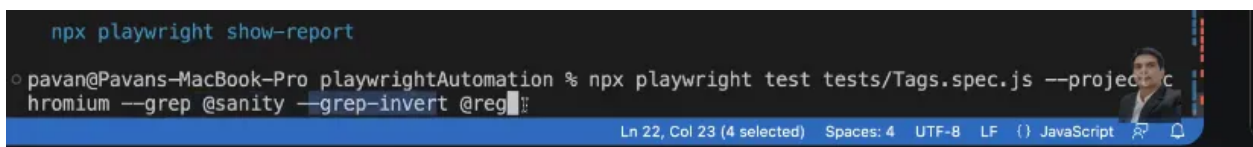

```
npx playwright show-report  
pavan@Pavans-MacBook-Pro playwrightAutomation % npx playwright test tests/Tags.spec.js --project c  
hromium --grep @sanity --grep-invert @reg
```

```
1 //
2 const { test, expect } = require('@playwright/test')
3
4 //this is one way to create tag.
5 test('test1@sanity', async({page}) =>{
6     console.log('this is my test1...')
7 })
8
9 //tag can come before name of test also.
10 test('@sanitytest1', async({page}) =>{
11     console.log('this is my test1...')
12 })
13
14
15 test('test2@sanity', async({page}) =>{
16     console.log('this is my test2...')
17 })
18
19
20 test('test3@reg', async({page}) =>{
21     console.log('this is my test3...')
22 })
23
24
25 test('test4@reg', async({page}) =>{
26     console.log('this is my test4...')
27 })
28
29 //multiple tags for one test.
30 test('test5@sanity@reg', async({page}) =>{
31     console.log('this is my test5...')
32 })
```