


pavanpw-38

How To Retry Failed Test Cases | Retries and Test Flakiness


```
11  
12 # Give failing tests 3 retry attempts  
13 npx playwright test --retries=3  
14
```

change in pw config-

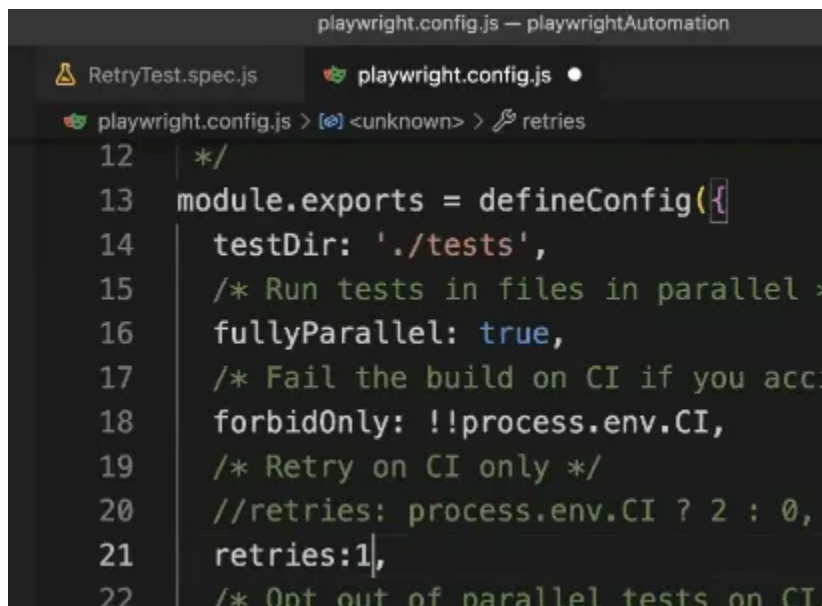

The screenshot shows a code editor with the file 'playwright.config.js' open. The editor has a dark theme. The file content is as follows:

```
12  */  
13  module.exports = defineConfig({  
14    testDir: './tests',  
15    /* Run tests in files in parallel */  
16    fullyParallel: true,  
17    /* Fail the build on CI if you accidentally have test.only in the source code. */  
18    forbidOnly: !!process.env.CI,  
19    /* Retry on CI only */  
20    //retries: process.env.CI ? 2 : 0,  
21    retries:1,  
22    /* Opt out of parallel tests on CI. */
```

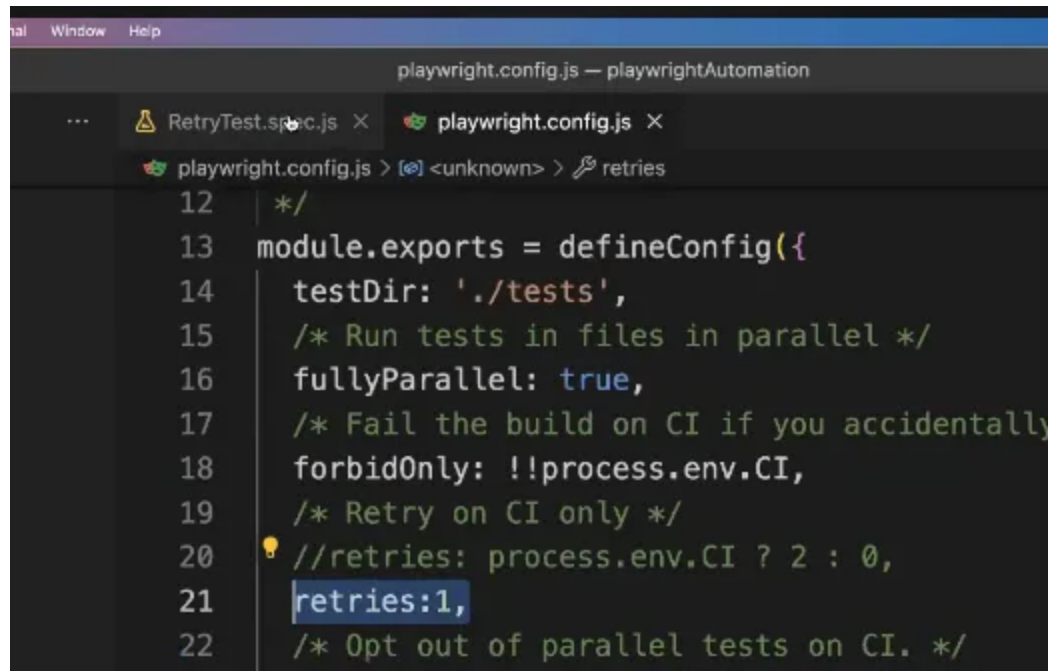

The screenshot shows a VS Code editor window with the title bar 'playwright.config.js — playwrightAutomation'. The editor has two tabs: 'RetryTest.spec.js' and 'playwright.config.js'. The 'playwright.config.js' tab is active, showing the following code:


```
12  */
13  module.exports = defineConfig({
14    testDir: './tests',
15    /* Run tests in files in parallel */
16    fullyParallel: true,
17    /* Fail the build on CI if you accidentally
18    forbidOnly: !!process.env.CI,
19    /* Retry on CI only */
20    //retries: process.env.CI ? 2 : 0,
21    retries:1,
22    /* Opt out of parallel tests on CI. */
```

The line `retries:1,` on line 21 is highlighted with a blue selection background.

retry works when we run from cmd not that extension.

seems like extension not stable enough.

retry for specific file using cmd not from pw config-



The screenshot shows a terminal window with the following command:

```
◉ pavan@Pavans-MacBook-Pro playwrightAutomation % npx playwright test tests/RetryTest.spec.js --proj  
ect chromium --headed --retries=1
```