


pw-03rd dec-7

—Create view in Jenkins—

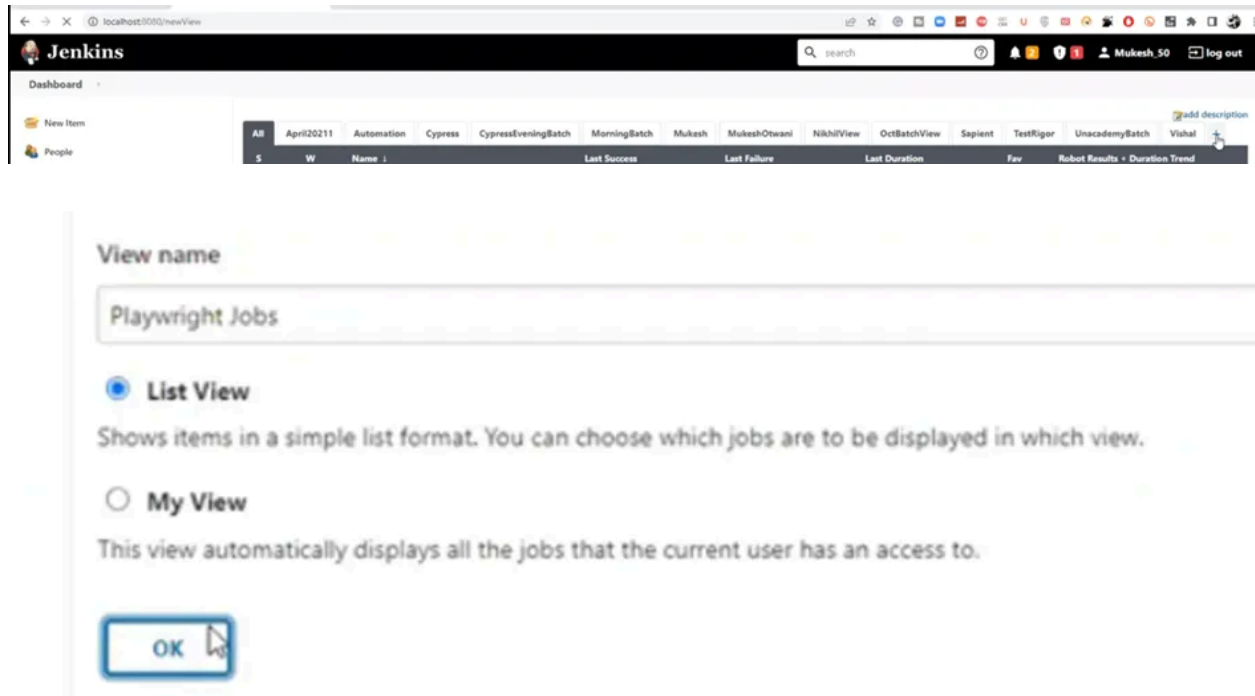

Create github, gitlab or bit bucket account- Add our project there.

Go back to Jenkins- Free style project. Click the **add to current view checkbox**.

← → × ⓘ localhost:8080/view/Playwright%20Jobs/newJob

 Jenkins

Dashboard > Playwright Jobs >

Enter an item name

PlaywrightSmokeTest

» Required field

**Freestyle project**
This is the central feature of Jenkins. Jenkins will build your project, combining

**Maven project**
Build a maven project. Jenkins takes advantage of your POM files and drastic

**Pipeline**
Orchestrates long-running activities that can span multiple build agents. Suit

**Multi-configuration project**
Suitable for projects that need a large number of different configurations, su

**Folder**
Creates a container that stores nested items in it. Useful for grouping things as they are in different folders.

**Multibranch Pipeline**
Creates a set of Pipeline projects according to detected branches in one SCH

**Organization Folder**
Creates a set of multibranch project subfolders by scanning for repositories.


If you want to create a new item from other existing, you can use this option

OK

Type to autocomplete
☒ Add to current view


Click ok.

Add the git details and credentials-

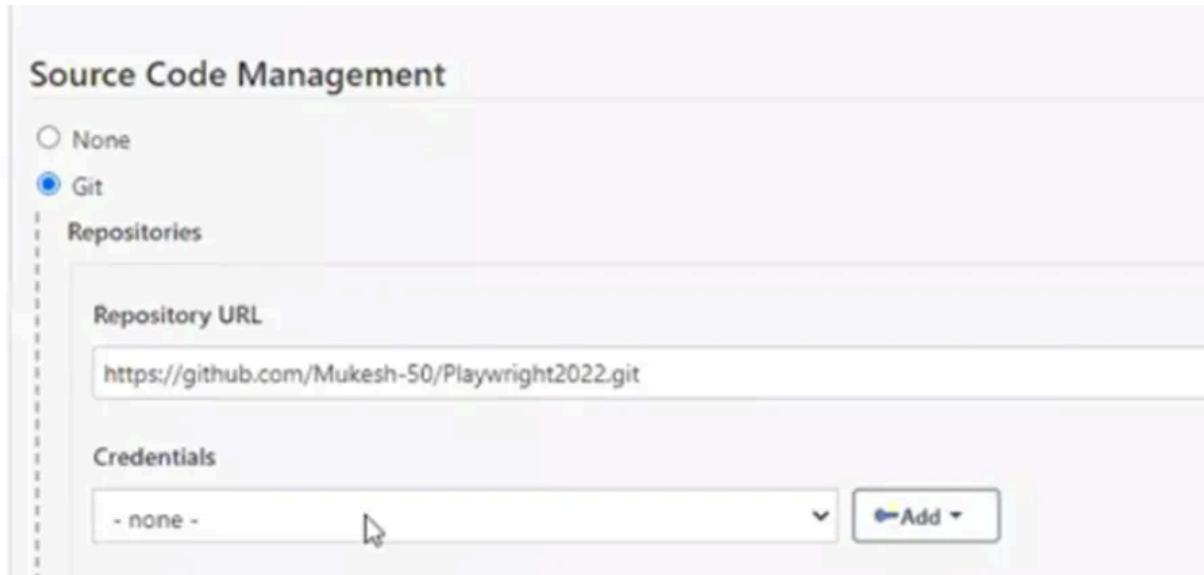


The screenshot shows the 'Source Code Management' section of a Jenkins configuration page. Under the 'Source Code Management' heading, the 'Git' radio button is selected. Below this, the 'Repositories' section contains a 'Repository URL' field with the value 'https://github.com/Mukesh-50/Playwright2022.git'. Under the 'Credentials' section, a dropdown menu is set to '- none -' and an 'Add' button is visible to its right.

Select the branch on which to run-

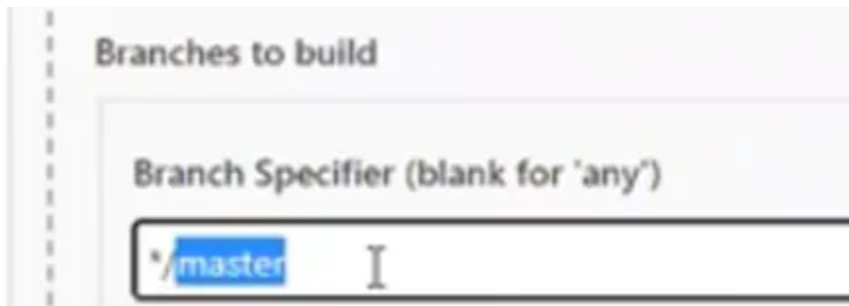

The screenshot shows the 'Branches to build' section of a Jenkins configuration page. It features a 'Branch Specifier (blank for 'any')' label above a text input field. The input field contains the text '*/master' and has a cursor at the end of the text.

Give build actions-

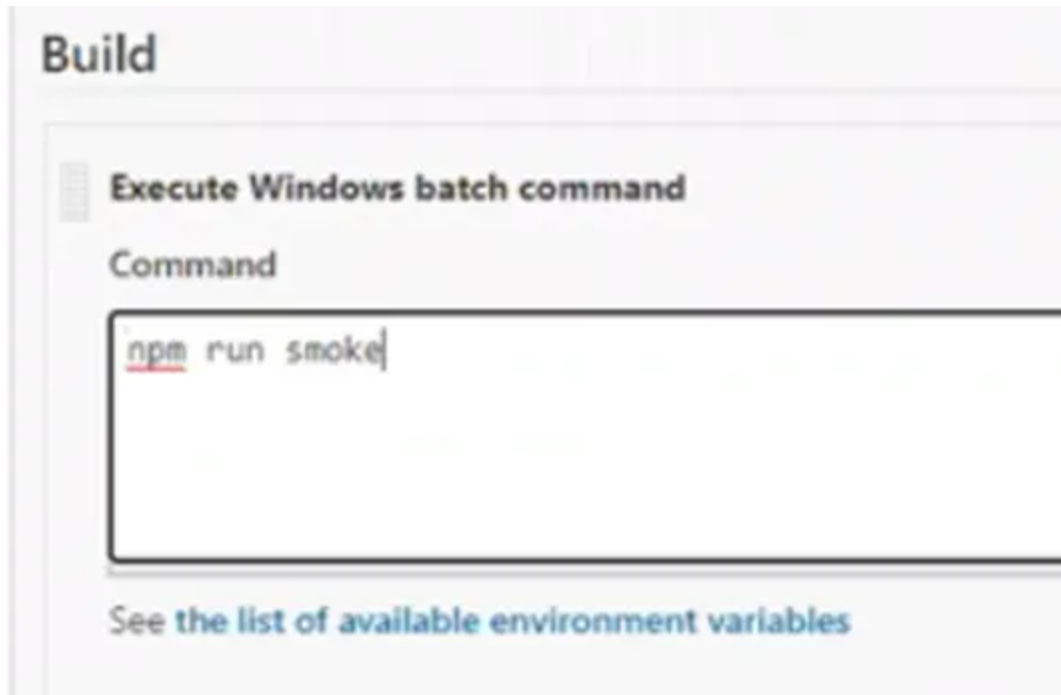


Click save.

Click build now-




Click on the running one.

Configure option will come once we click on the job name-

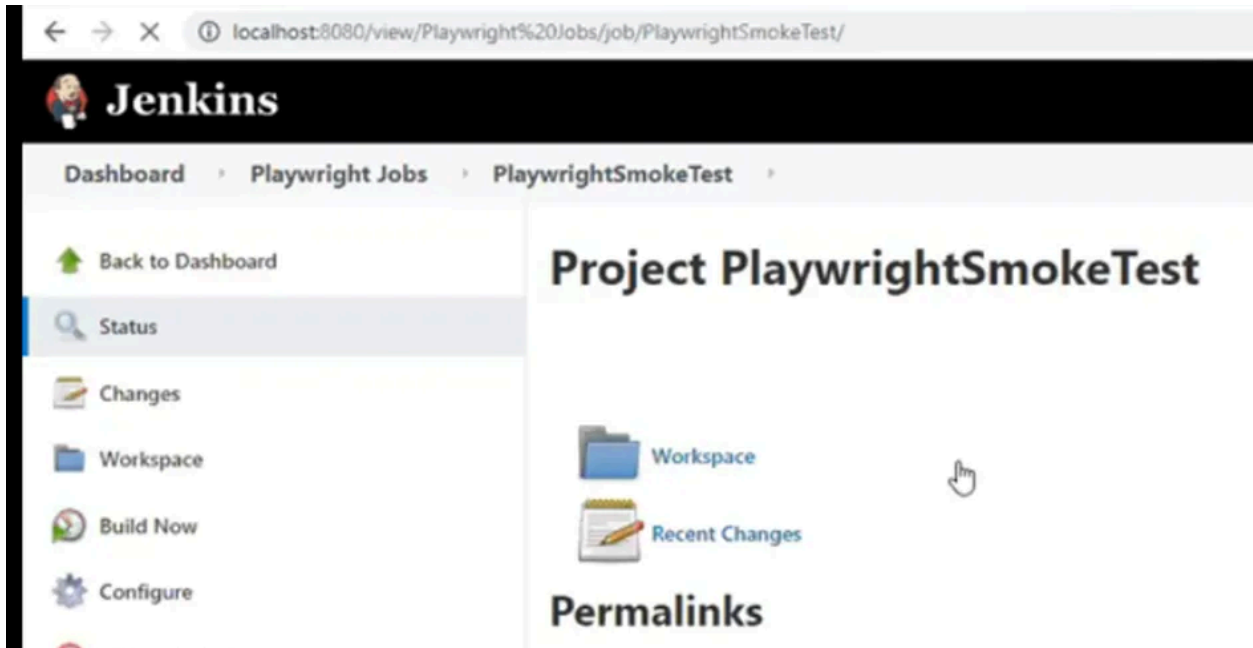

Git hub actions- Go to repo in github.

Click actions. Set up workflow or use any of the existing ones.

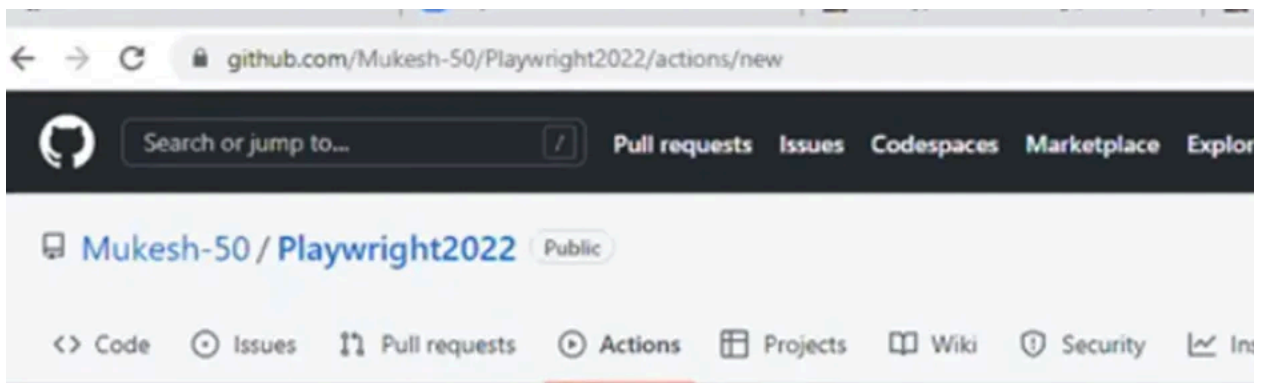

Ours is node js so we select first one.

Get started with GitHub Actions

Build, test, and deploy your code. Make code reviews, branch management, and issue triaging work the way you want. Select a workflow to get started.

Skip this and [set up a workflow yourself](#) →

🔍 Search workflows

Suggested for this repository

Publish Node.js Package to GitHub Packages
By GitHub Actions
Publishes a Node.js package to GitHub Packages.

Configure

JavaScript

Publish Node.js Package
By GitHub Actions
Publishes a Node.js package to npm.

Configure

JavaScript

Grunt
By GitHub Actions
Build a Node.js project with npm and grunt.

Configure

JavaScript

Gulp
By GitHub Actions
Build a Node.js project with npm and gulp.

Configure

JavaScript

Webpack
By GitHub Actions
Build a Node.js project with npm and webpack.

Configure

JavaScript

Deno
By GitHub Actions
Test your Deno project

Configure

JavaScript

Deployment


[View all](#)

Checkout- Checks out code from github to image. Set up node on image. In **“with”** give the node version number. Give name and what we want to run. **“If”** will give condition on when to do the job.

What is the action to be performed after **“if”** is written in **“uses”**. Give name to report. Give path to report.

```
3
4  name: Playwright Jobs
5
6  on: push
7
8  jobs:
9    test:
10     runs-on: ubuntu-latest
11     steps:
12       - uses: actions/checkout@v3
13       - uses: actions/setup-node@v3
14         with:
15           node-version: 16
16       - name: Install dependencies
17         run: npm ci
18       - name: Install Playwright
19         run: npx playwright install --with-deps
20       - name: Run your tests
21         run: npm run smoke
22       - name: Upload test results
23         if: always()
24         uses: actions/upload-artifact@v2
25         with:
26           name: playwright-report
27           path: playwright-report
28
```

Artifact area to check if the job ran-

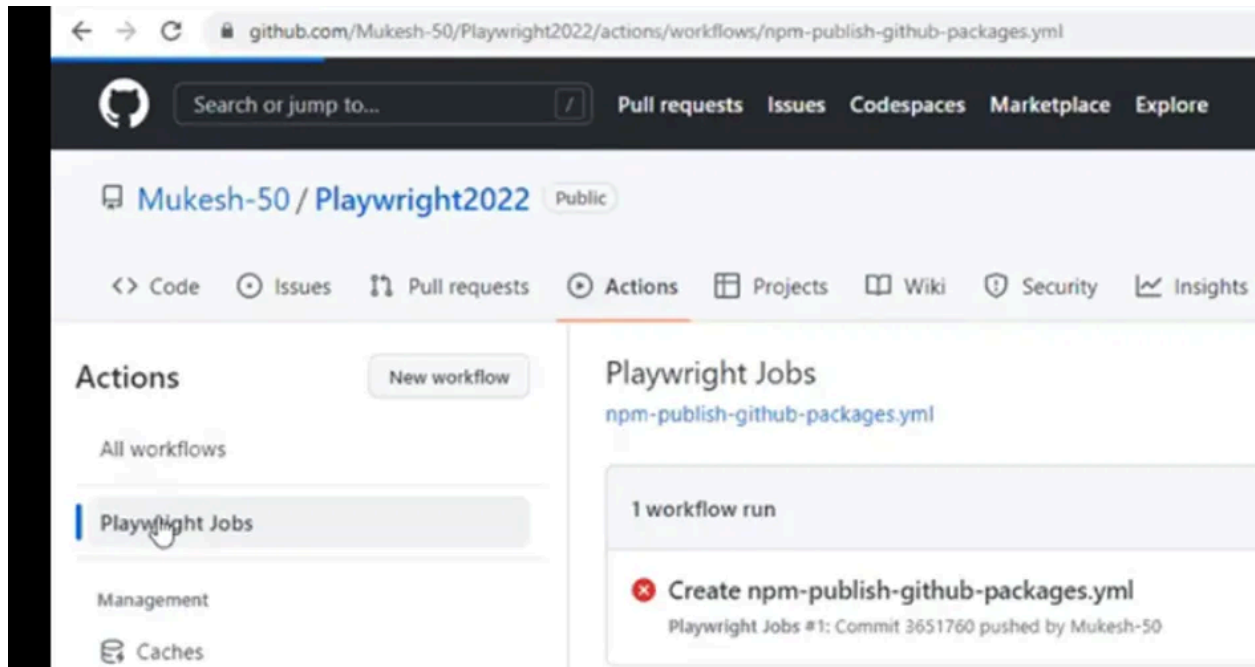

Playwright jobs once clicked will show the report when scrolled down.

Create multiple jobs in our github actions- Multiple jobs can be created and run in parallel.

Webdriver io- Can automate web, mobile, desktop(built with electron.js).