


Data test id -

This is made by developers.

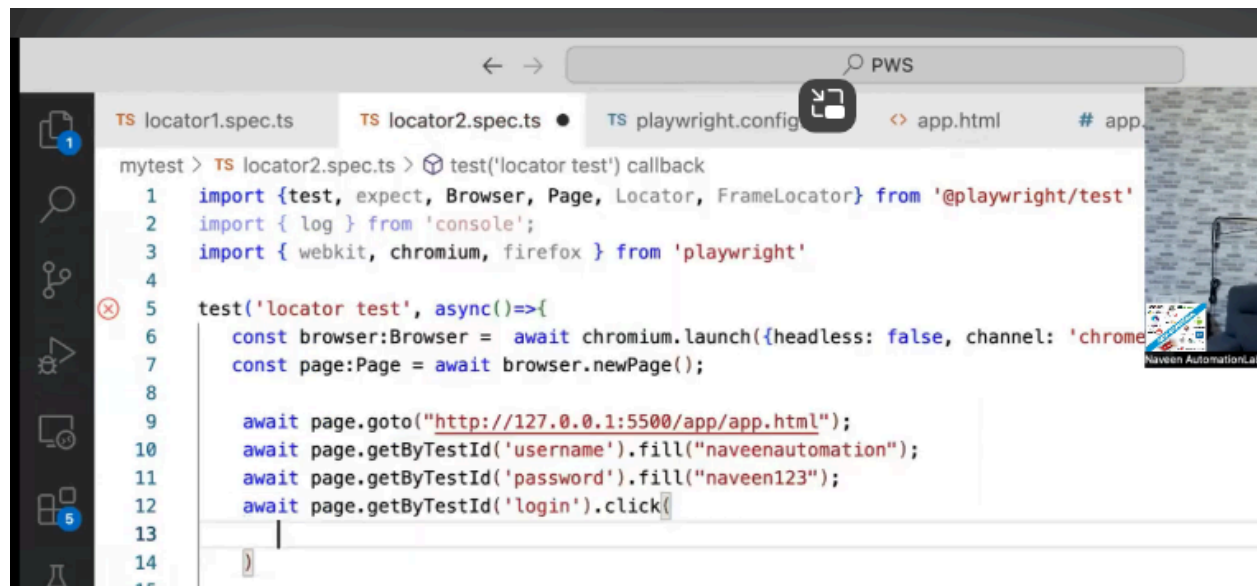


If the attribute name is changed by developer then we need to inform pw.

Go to the pw config file.

Change name in the use section:

```
19 retries: process.env.CI ? 2 : 0,  
20 /* Opt out of parallel tests on CI. */  
21 workers: process.env.CI ? 1 : undefined,  
22 /* Reporter to use. See https://playwright.dev  
23 reporter: 'html',  
24 /* Shared settings for all the projects below  
25 use: {  
26   /* Base URL to use in actions like `await p  
27   // baseUrl: 'http://127.0.0.1:3000',  
28  
29   /* Collect trace when retrying the failed t  
30   trace: 'on-first-retry',  
31   testIdAttribute: 'data-naveenid'  
32 },  
33 },  
34
```

Then use this and it will work-

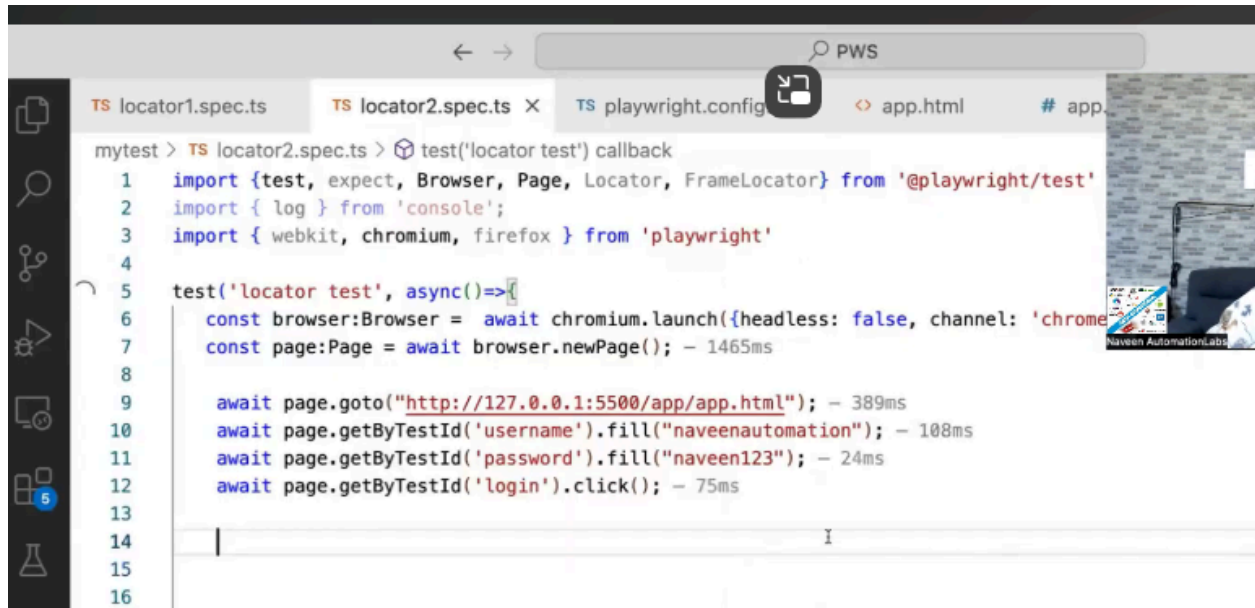

```
TS locator1.spec.ts TS locator2.spec.ts X TS playwright.config app.html # app.  
mytest > TS locator2.spec.ts > test('locator test') callback  
1 import {test, expect, Browser, Page, Locator, FrameLocator} from '@playwright/test'  
2 import { log } from 'console';  
3 import { webkit, chromium, firefox } from 'playwright'  
4  
5 test('locator test', async()=>{  
6   const browser:Browser = await chromium.launch({headless: false, channel: 'chrome'  
7   const page:Page = await browser.newPage(); - 1465ms  
8  
9   await page.goto("http://127.0.0.1:5500/app/app.html"); - 389ms  
10  await page.getByTestId('username').fill("naveenautomation"); - 108ms  
11  await page.getByTestId('password').fill("naveen123"); - 24ms  
12  await page.getByTestId('login').click(); - 75ms  
13  
14  
15  
16
```


So in short the attribute name cannot be changed.

When we try to use locator with the developer defined id-



```
6 const browser:Browser = await chromium.launch({headless: false, channel: 'chrome'  
7 const page:Page = await browser.newPage(); - 1333ms  
8  
9 await page.goto("http://127.0.0.1:5500/app/app.html"); - 299ms  
10  
11 await page.locator("data-naveenid=username").fill("naveenautomation"); Er  
12
```

We get error

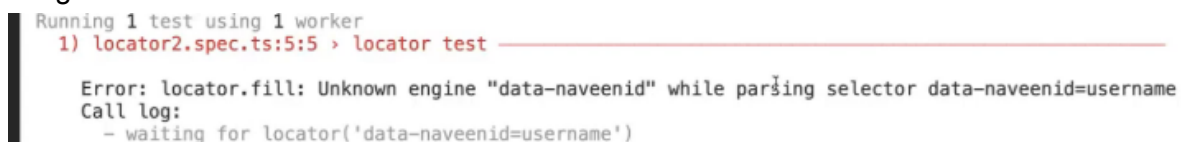

```
Running 1 test using 1 worker  
1) locator2.spec.ts:5:5 > locator test  
  
Error: locator.fill: Unknown engine "data-naveenid" while parsing selector data-naveenid=username  
Call log:  
- waiting for locator('data-naveenid=username')
```

Put the developer id in form of css inside [] and it works-



```
7 const page:Page = await browser.newPage(); - 914ms  
8  
9 await page.goto("http://127.0.0.1:5500/app/app.html"); - 381ms  
10  
11 await page.locator("[data-naveenid=username]").fill("naveenautomation"); - 346ms  
12
```