Code :-

Main.cpp

```cpp
#include <iostream>
using namespace std;

class Bank {
private:
    string name;
    int balance;
    static int count;

public:
    Bank(string name, int balance) {
        this->name = name;
        this->balance = balance;
        count++;
    }

    // Inline function
    inline void display() {
        cout << "Name: " << name << endl;
        cout << "Balance: Rs. " << balance << endl;
    }

    // Static member function
    static void showCount() {
        cout << "Total Accounts: " << count << endl;
    }

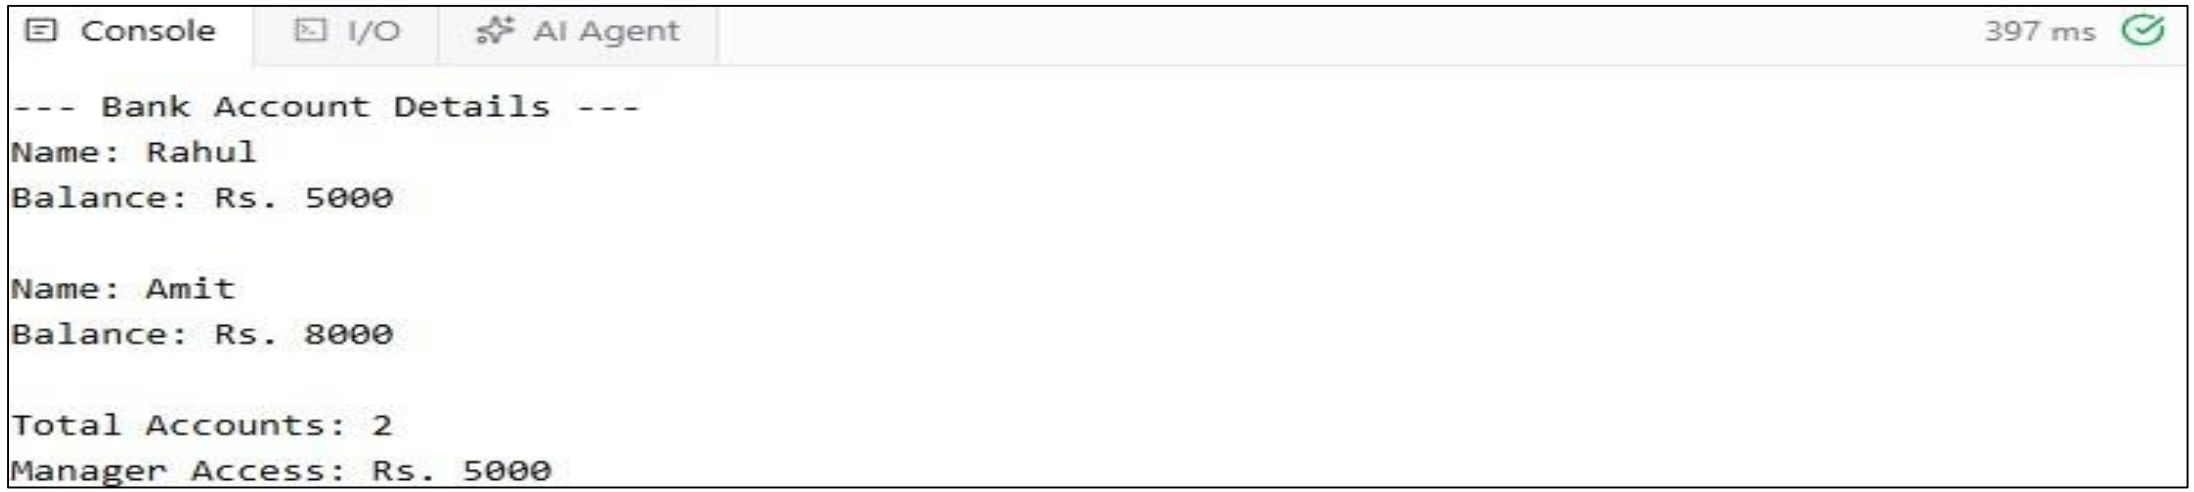
    // Friend class
    friend class Manager;
};

// Initialize static member
int Bank::count = 0;

// Friend class
class Manager {
public:
    void showBalance(Bank b) {
        cout << "Manager Access: Rs. "
             << b.balance << endl;
    }
};
```

```
43
44  int main() {
45
46      Bank b1("Rahul", 5000);
47      Bank b2("Amit", 8000);
48
49      cout << "--- Bank Account Details ---" << endl;
50
51      b1.display();
52      cout << endl;
53
54      b2.display();
55      cout << endl;
56
57      // Static member function
58      Bank::showCount();
59
60      // Friend class accessing private data
61      Manager m;
62      m.showBalance(b1);
63
64      return 0;
65  }
66
```

Output:-


Console
I/O
AI Agent
397 ms
--- Bank Account Details ---
Name: Rahul
Balance: Rs. 5000
Name: Amit
Balance: Rs. 8000
Total Accounts: 2
Manager Access: Rs. 5000