

Aim: Wap to connecting a database using user-id and password.

```
package jdbc;

import java.sql.*;

public class jdbc
{
    public static void main(String [] args)
    { /*
String host = "dbhost.yourcompany.com";
String dbName = "someName";
int port = 1234;
String oracleURL = "jdbc:oracle:thin:@" + host +
":" + port + ":" + dbName;
String sybaseURL = "jdbc:sybase:Tds:" + host +
":" + port + ":" + "?SERVICENAME=" + dbName;
String msAccessURL = "jdbc:odbc:" + dbName;
*/
    try
    {
        //Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");
        String MYSQLURL="jdbc:mysql://localhost:3306/mydb";
        // String msAccessURL="jdbc:oracle:thin:@localhost:1521:";
        Connection con =DriverManager.getConnection(MYSQLURL,"root","12345");
        Statement stat =con.createStatement();
        String query="SELECT * from Table1";
        ResultSet res=stat.executeQuery(query);/*executeQuery returns only a single
ResultSet object*/
        //it cant be called on preparedstatement
        while(res.next())
```

```
{
System.out.println(res.getString("id")+ "::"+res.getString("name")+ "::"+res.getString("
branch"));
    }
    con.close();
}
catch(Exception ee)
{
    System.out.println(ee.getMessage());
}

}

}
```

Output:

```
MySQL 5.7 Command Line Client

+----+-----+-----+
| id | name | branch |
+----+-----+-----+
| 101 | aman | cse    |
| 102 | karan | cse    |
+----+-----+-----+
2 rows in set (0.00 sec)

mysql> insert into table1 values(103,"pawan","cse");
Query OK, 1 row affected (0.06 sec)

mysql> insert into table1 values(104,"anish","cse");
Query OK, 1 row affected (0.14 sec)

mysql> insert into table1 values(105,"sumit","biotech");
Query OK, 1 row affected (0.08 sec)

mysql> select * from table1;
+----+-----+-----+
| id | name | branch |
+----+-----+-----+
| 101 | aman | cse    |
| 102 | karan | cse    |
| 103 | pawan | cse    |
| 104 | anish | cse    |
| 105 | sumit | biotech |
+----+-----+-----+
5 rows in set (0.00 sec)

mysql>
```

Output 1

```
Output

Java DB Database Process x GlassFish Server 4.1 x javaprogs (run) x

run:
101::aman::cse
102::karan::cse
103::pawan::cse
104::anish::cse
105::sumit::biotech
BUILD SUCCESSFUL (total time: 3 seconds)
```

Output 2

Aim: Wap to implement the concept of prepared statement.

```
package jdbc;
import java.sql.*;
public class preparedstatement
{
    /*
        Moves the cursor to the previous row in this ResultSet object.
        When a call to the previous method returns false,
        the cursor is positioned before the first row. Any invocation of a ResultSet method
        which requires a current row will result in a SQLException being thrown.
    */
    static Connection con=null;
    static String username="root";
    static String pass="12345";
    static String url="jdbc:mysql://localhost:3306/mydb";
    static String query="Select * from table1 where branch=? and name=? ";
    public static void main(String [] args)
    {

        try
        {
            con =DriverManager.getConnection(url,username,pass);
            PreparedStatement stat=con.prepareStatement(query);
            stat.setString(1,"cse");
            stat.setString(2,"aman");

            ResultSet res=stat.executeQuery();// execute statment does not return resultset
            object
            while(res.next())
```

```
{
```

```
/*
```

Moves the cursor forward one row from its current position.

A ResultSet cursor is initially positioned before the first row; the first call to the method next makes the first row the current row; the second call makes the second row the current row, and so on.

When a call to the next method returns false, the cursor is positioned after the last row.

```
*/
```

```
System.out.println(res.getString("id")+ "::"+res.getString("name")+ "::"+res.getString("branch"));
```

```
}
```

```
con.close();
```

```
}
```

```
catch(SQLException ee)
```

```
{
```


```
    System.out.println(ee.getMessage());
```

```
}
```

```
}
```

```
}
```

Output:

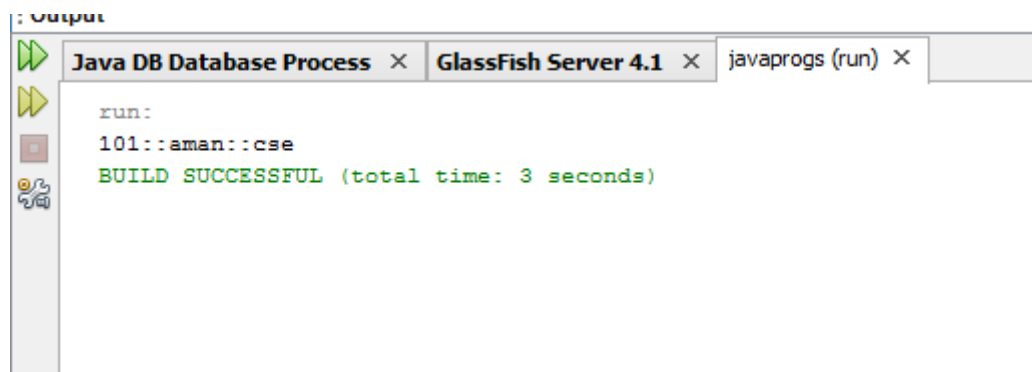

Output 1

Aim: WAP to read data send by the client (HTML page) using servlet

HTML Page:

```
<!DOCTYPE html>

<html>

<head><title>A Sample Form Using GET</title></head>

<body bgcolor="PINK">

<h2 align="center">A Sample Form Using GET</h2>

<Form Action="formdata" method="Get">

<Center>

<label>First Name:

<INPUT TYPE="TEXT" NAME="firstName" ><br>

</label>

Last Name:

<INPUT TYPE="TEXT" name="secondName" ><p>

<INPUT TYPE="SUBMIT">

</Center>

</Form>

</body>

</html>
```

Servlet Code:

```
import javax.servlet.*;

import javax.servlet.http.*;

import javax.servlet.http.HttpServletRequest;

import java.io.*;

import javax.servlet.annotation.WebServlet;

@WebServlet(name="formdata",

            urlPatterns={"/formdata"})

public class formdata extends HttpServlet
```

```

{
    @Override

    public void doGet(HttpServletRequest request, HttpServletResponse response) throws
ServletException ,IOException

    {
        PrintWriter out=response.getWriter();
        if(request.getParameter("firstName")==null | request.getParameter("firstName").trim().equ
als(""))
        {
            out.println("<html>"+
"<head><title>A Sample Form Using GET</title></head>"+
"<body>"+
"<h2 align=center>A Sample Form Using GET</h2>"+
"<Form Action=formdata method=Get>"+
"<Center>"+
"<label>First Name:"+"
"<INPUT TYPE=TEXT NAME=firstName ><br>"+
"</label>"+
"Last Name:"+"
"<INPUT TYPE=TEXT name=secondName ><p>"+
"<INPUT TYPE=SUBMIT>"+
"</Center>"+
"</Form>"+
"</body>"+
"</html>");
        }
        else
        {
            out.println(
                "<html>\n"+

```



```
"<head><title>Getting Form Data</title></head>\n"+
"<body bgcolor=\">\n"+
"<h2 align=CENTER>\n"+
"    <table align='center' border='5' width='15%' height='15%' bgcolor=\"><tr><td>"
+
"First Name:"+request.getParameter("firstName")+"</td></tr>");
out.println(
    "<tr><td>"+ "Second
Name:"+request.getParameter("secondName")+"</td></tr>"
    "</h2>"
    "</body>"
    "</html>"
    );    }
}
}
```

Output

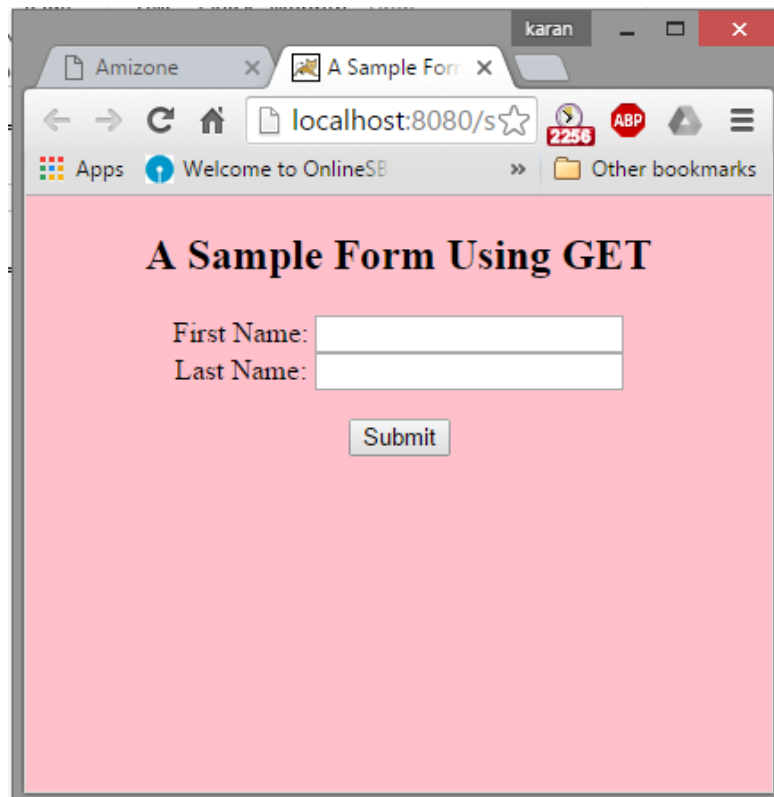


Figure 1(HTML Page)

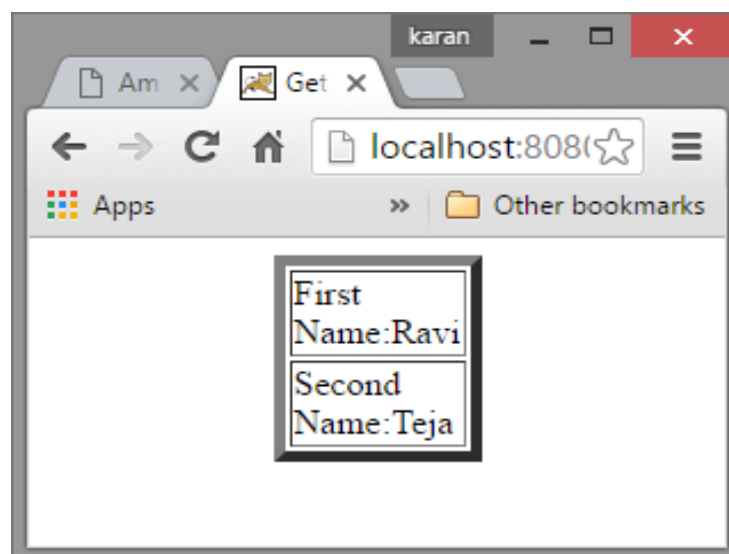


Figure 2

Aim: Write a java jsp program for online movie booking.

Code:

Customerinput.jsp

```
<%@page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
<title>Online Movie booking System</title>
</head>
<body>
<form action="Ticket.jsp" method="post">
<table border="0">
<tr>
<td>Enter Name:</td>
<td><input type="text" name="name" /></td>
</tr>
<tr>
<td>Select Movie:</td>
<td><Select name="movie">
<option value="Ki&Ka">Ki&Ka</option>
<option value="Love Games">Love Games</option>
</Select>
</td>
</tr>
<tr>
<td>Select timings:</td>
<td><input type="radio" name="time1" value="1.00 am" />1.00am
```

```
<input type="radio" name="time1" value="2.00 am"/>2.00am
<input type="radio" name="time1" value="3.00 am"/>3.00am</td>
</tr>
<tr>
<td>Enter Date(dd/mm/yy):</td>
<td><input type="date" name="datemovie"/></td>
</tr>
<tr>
<td><input type="Submit" value="Book Now"/></td>
</tr>
</table>
</form>
</body>
</html>
```

Ticket.jsp

```
<%@ page contentType="text/html" pageEncoding="UTF-8"%>

<!DOCTYPE html>

<html>

<head>

<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">

<title>Ticket</title>

</head>

<body>

Thank You!

<%=request.getParameter("name")%><br/>

You have booked the movie

&nbsp;&nbsp;&nbsp;&nbsp;<%=request.getParameter("movie")%><br/>
```

at <%=request.getParameter("time1")%>

on <%=request.getParameter("datemovie")%>

Have a nice day!

</body>

</html>

Output:

Enter Name:

Select Movie:

Select timings: ☒ 1.00am ☐ 2.00am ☐ 3.00am

Enter Date(dd/mm/yy):

Figure 1

Thank You! Gaurav
You have booked the movie Love Games
at 1.00 am
on 2016-04-20
Have a nice day!

Figure 2

Aim: Write a java jsp program to store above details by user in database.

Code:

Ticket.jsp

```
<%@ page import="java.sql.*, javax.sql.*" %>
<%@ page contentType="text/html" pageEncoding="UTF-8"%>
<!DOCTYPE html>
<html>
<head>
<meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
<title>Ticket</title>
</head>
<body>
<%
String s;
String a = (request.getParameter("name"));
String b = request.getParameter("movie");
String c = request.getParameter("time1");
String d= request.getParameter("datemovie");
try
{
Class.forName("sun.jdbc.odbc.JdbcOdbcDriver");
Connection con=DriverManager.getConnection("jdbc:odbc:mydsn","","");
PreparedStatement stm = con.prepareStatement("INSERT INTO
bookings(C_Name,Movie,Timings,Movie_Date) VALUES(?, ?, ?, ?)");
stm.setString(1, a);
stm.setString(2, b);
stm.setString(3, c);
```

```
stm.setString(4, d);  
int updateCount = stm.executeUpdate();  
}catch(Exception e)  
{  
out.println("ERR:"+""+e.getMessage());  
}  
%>
```

Thank You!

```
<%=request.getParameter("name")%><br/>
```

You have booked the movie

```
&nbsp;&nbsp;&nbsp;<%=request.getParameter("movie")%><br/>
```

```
at&nbsp;&nbsp;&nbsp;<%=request.getParameter("time1")%><br/>
```

```
on&nbsp;&nbsp;&nbsp;<%=request.getParameter("datemovie")%><br />
```

Have a nice day!

```
</body>
```

```
</html>
```


Output:

Enter Name:

Select Movie:

Select timings: ☒ 1.00am ☐ 2.00am ☐ 3.00am

Enter Date(dd/mm/yy):

Figure 1

Thank You! Gaurav
You have booked the movie Love Games
at 1.00 am
on 2016-04-20
Have a nice day!

Figure 2

bookings			
C_Name	Movie	Timings	Movie_Date
Gaurav	Love Games	1.00 am	2016-04-20

Figure 3

Aim: Program on session tracking using cookie.

```
package testPackage;

import javax.servlet.http.HttpServlet;
import javax.servlet.http.HttpServletRequest;
import javax.servlet.http.HttpServletResponse;
import javax.servlet.annotation.WebServlet;
import javax.servlet.http.Cookie;
import java.io.*;

@WebServlet("/repeat-visitor")

public class RepeatVisitor extends HttpServlet
{
    @Override
    public void doGet(HttpServletRequest request, HttpServletResponse response)
    throws IOException
    {

        PrintWriter out =response.getWriter();

        boolean newbie=true;

        Cookie [] cookies=request.getCookies();
        if(cookies!=null)
        {
            for(Cookie c:cookies)
            {
                if(c.getName().equals("repeatVisitor")&& c.getValue().equals("yes"))
                {
                    newbie=false;
                    break;
                }
            }
        }
    }
}
```

```
    }  
    }  
}  
String Title;  
if(newbie)  
{  
    Cookie returnVisitorCookie=new Cookie("repeatVisitor","yes");  
    returnVisitorCookie.setMaxAge(60*60*24*7);//in seconds  
    response.addCookie(returnVisitorCookie);  
    Title="Welcome Abroad";  
}  
else  
{  
    Title="Welcome Back";  
}  
response.setContentType("text/html");  
out.println(Title);  
}}
```

Output:

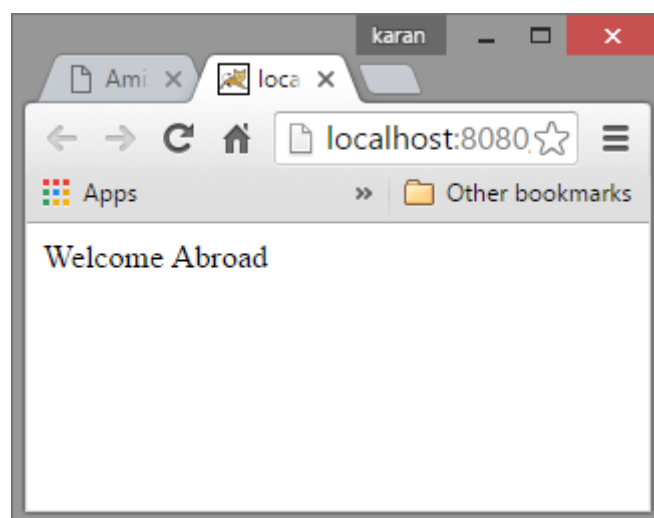


Figure 1

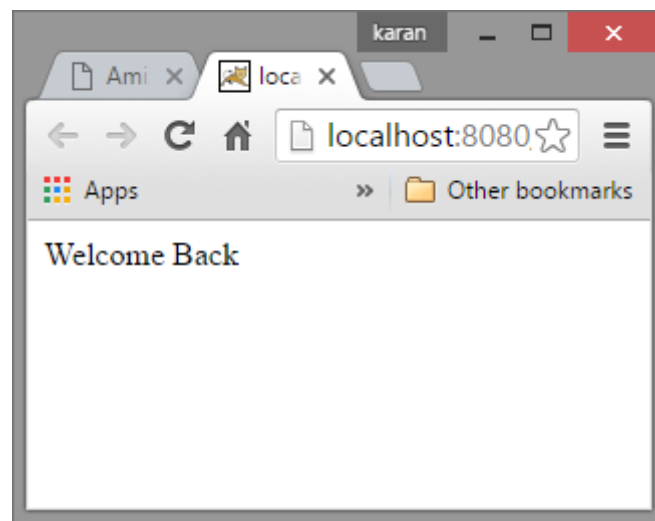


Figure 2