



Random Forest Simplified

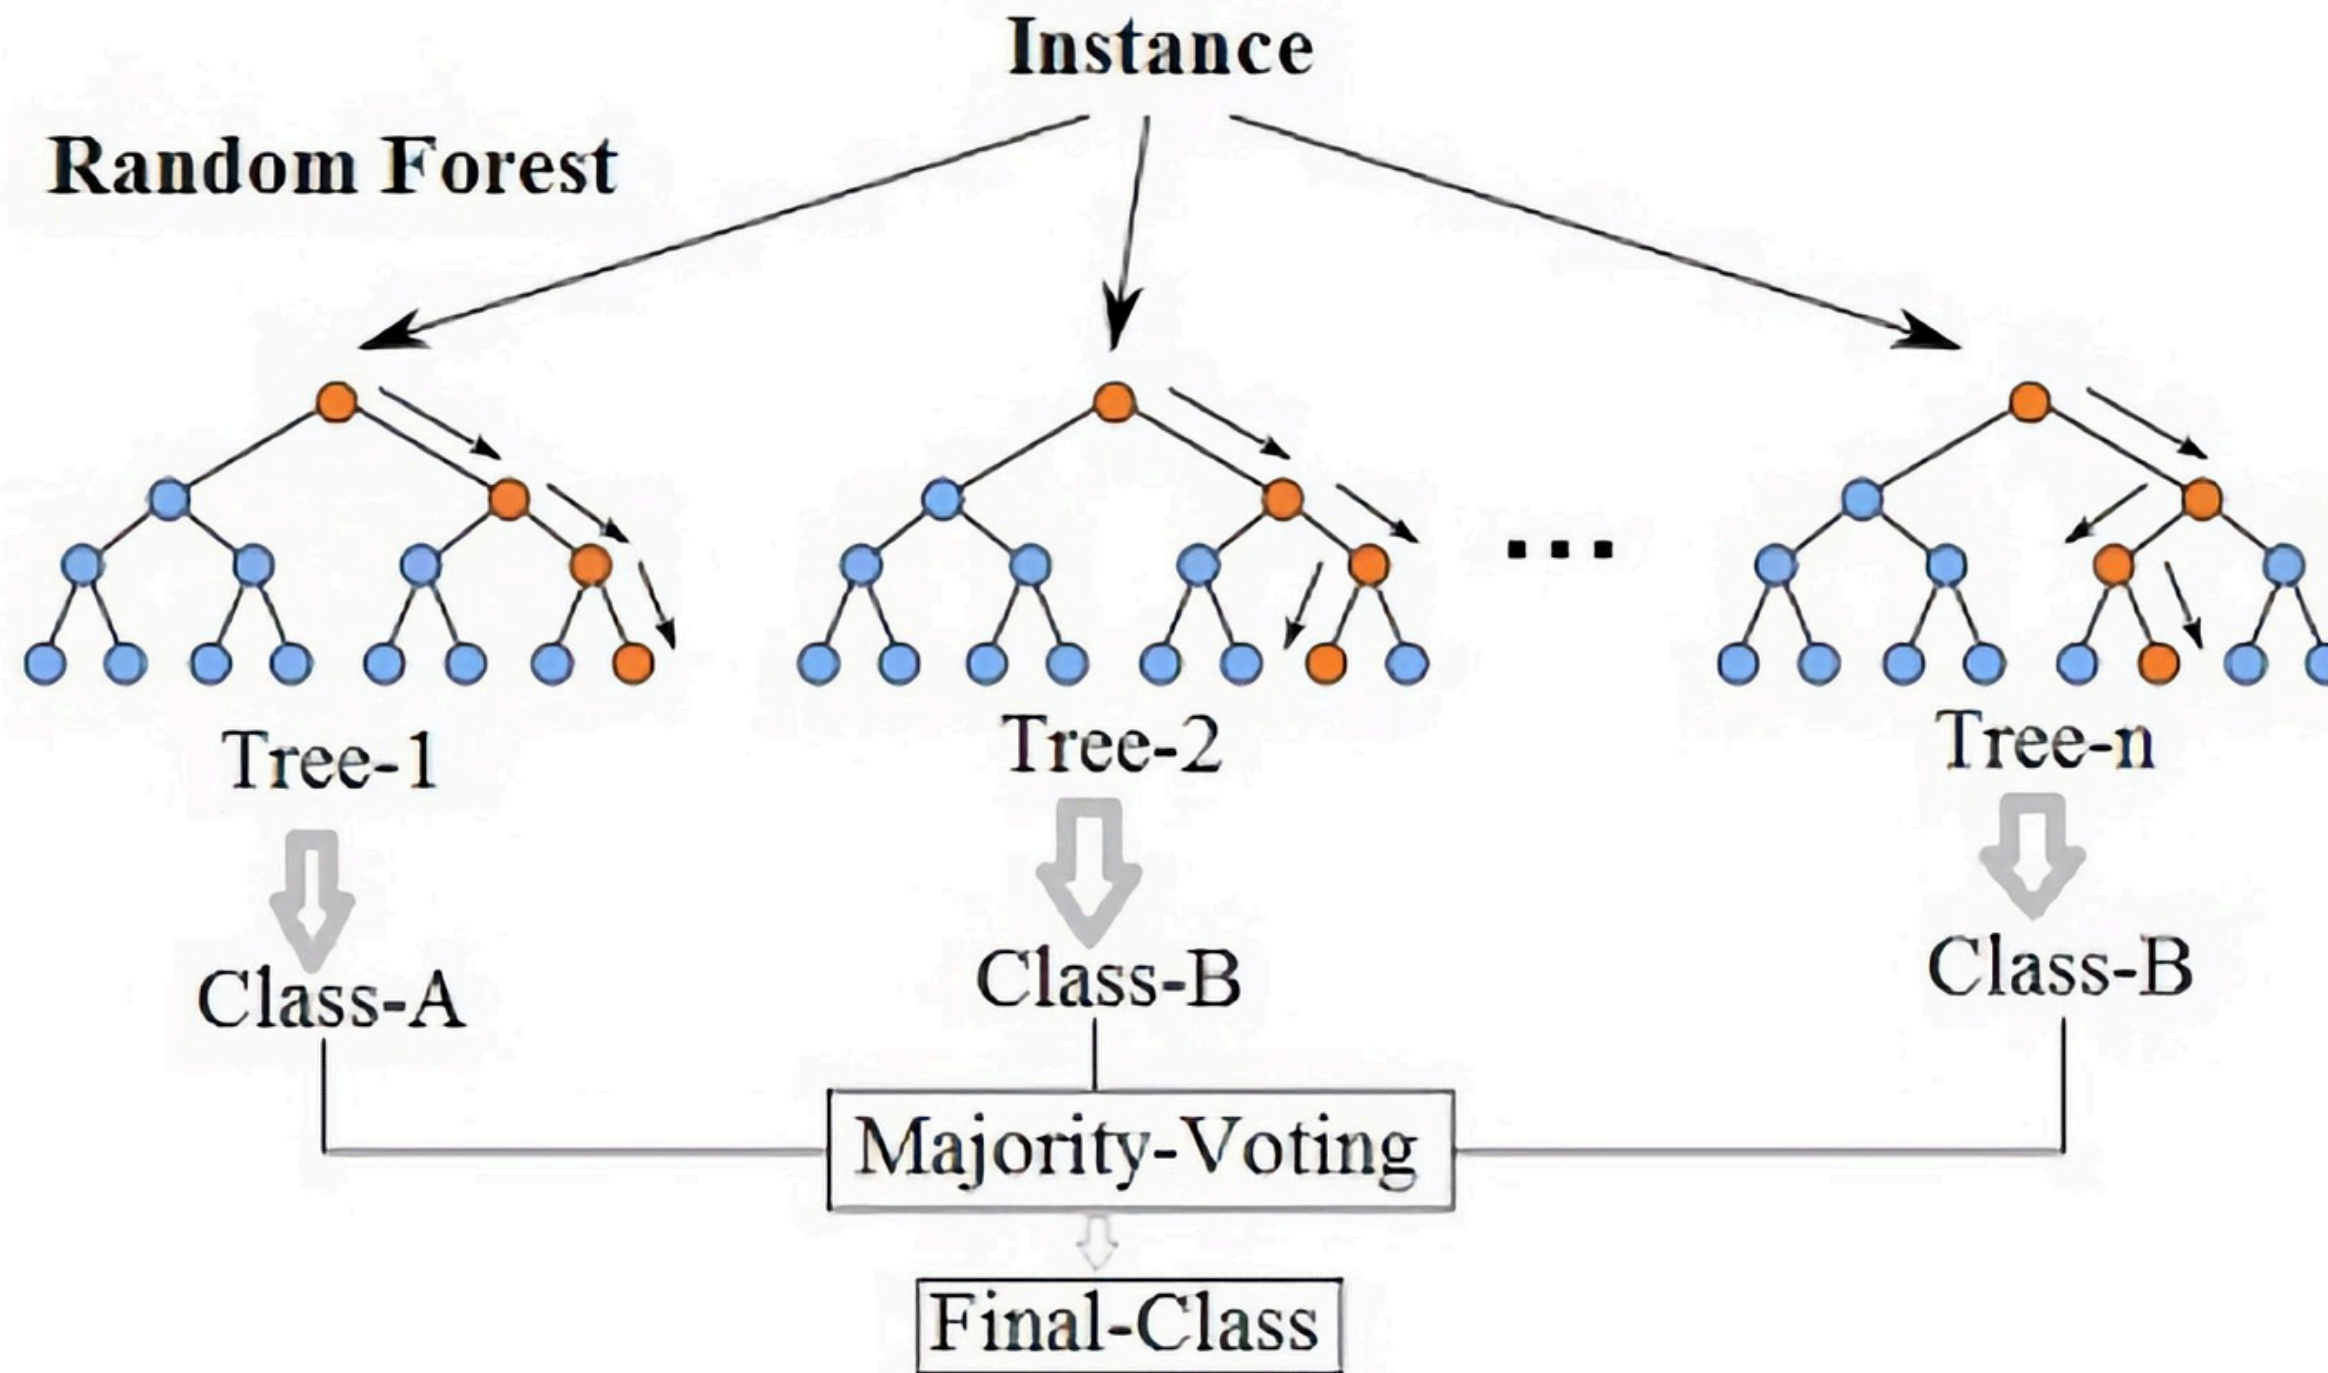


Bagging

Original data

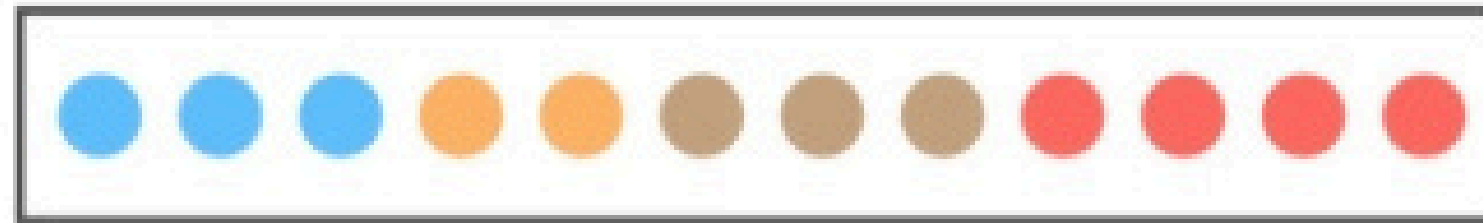

Bootstrap sample 1

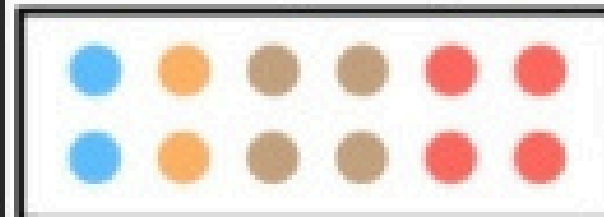

Bootstrap sample 2



...

Bootstrap sample n



Bootstrapping

(Sampling with replacement)

Model 1

Model 2

...

Model n

Model Training

(Different models such as Decision Trees, SVM, Logistic can be used)

© AIML.com Research

Aggregation

(Classification: Majority vote is taken
Regression: Average of outputs)

Bagging

Ensemble Model



Original Dataset (6 Rows)

Row ID	F1	F2	Label
1	5	2	0
2	6	3	1
3	4	1	0
4	7	4	1
5	3	2	0
6	8	5	1



Final Training Data for Tree 1

Row	F1	F3	Label
2	6	8	1
4	7	9	1
4	7	9	1
1	5	7	0
6	8	10	1
2	6	8	1



Final Training Data for Tree 2

Row	F2	F4	Label
1	2	1	0
3	1	1	0
5	2	2	0
5	2	2	0
2	3	2	1
6	5	4	1



Final Training Data for Tree 3

Row	F1	F4	Label
6	8	4	1
6	8	4	1
2	6	2	1
3	4	1	0
1	5	1	0
4	7	3	1

The Process of Boosting

