



[Click to Take the FREE Time Series Crash-Course](#)

Search...



11 Classical Time Series Forecasting Methods in Python (Cheat Sheet)

by **Jason Brownlee** on [August 6, 2018](#) in [Time Series](#)

Tweet

Share

Share

Last Updated on April 24, 2020

Machine learning methods can be used for classification and forecasting on [time series](#) problems.

Before exploring machine learning methods for time series, it is a good idea to ensure you have exhausted classical linear time series forecasting methods. Classical time series forecasting methods may be focused on linear relationships, nevertheless, they are sophisticated and perform well on a wide range of problems, assuming that your data is suitably prepared and the method is well configured.

In this post, you will discover a suite of classical methods for time series forecasting that you can test on your forecasting problem prior to exploring machine learning methods.

The post is structured as a cheat sheet to give you just enough information on each method to get started with a working code example and where to look to get more information on the method.

All code examples are in Python and use the Statsmodels library. The APIs for this library can be tricky for beginners (trust me!), so having a working code example as a starting point will greatly accelerate your progress.


This is a large post; you may want to bookmark it.

Discover how to prepare and visualize time series data and develop autoregressive forecasting models in [my new book](#), with 28 step-by-step tutorials, and full python code.

Let's get started.

- **Updated Apr/2020:** Changed AR to AutoReg due to [API change](#)

[Start Machine Learning](#)

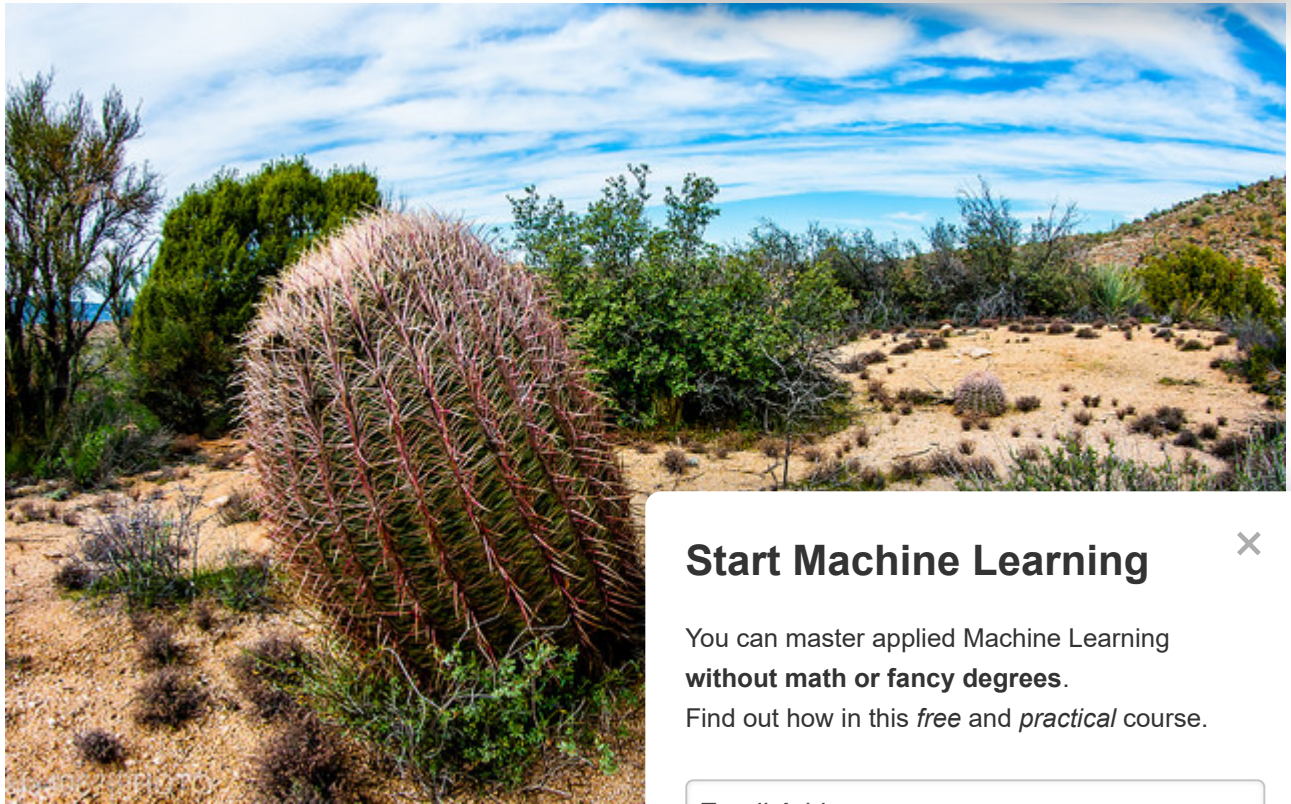

11 Classical Time Series Forecasting
Photo by [Ron Reiring](#),

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

Overview

This cheat sheet demonstrates 11 different classical time series forecasting methods; they are:

1. Autoregression (AR)
2. Moving Average (MA)
3. Autoregressive Moving Average (ARMA)
4. Autoregressive Integrated Moving Average (ARIMA)
5. Seasonal Autoregressive Integrated Moving-Average (SARIMA)
6. Seasonal Autoregressive Integrated Moving-Average with Exogenous Regressors (SARIMAX)
7. Vector Autoregression (VAR)
8. Vector Autoregression Moving-Average (VARMA)
9. Vector Autoregression Moving-Average with Exogenous Regressors (VARMAX)
10. Simple Exponential Smoothing (SES)
11. Holt Winter's Exponential Smoothing (HWES)

Did I miss your favorite classical time series forecasting method?
Let me know in the comments below.

Each method is presented in a consistent manner.

This includes:

- **Description.** A short and precise description of the

Start Machine Learning

- **Python Code.** A short working example of fitting the model and making a prediction in Python.
- **More Information.** References for the API and the algorithm.

Each code example is demonstrated on a simple contrived dataset that may or may not be appropriate for the method. Replace the contrived dataset with your data in order to test the method.

Remember: each method will require tuning to your specific problem. In many cases, I have examples of how to configure and even grid search parameters on the blog already, try the search function.

If you find this cheat sheet useful, please let me know in the comments below.

Autoregression (AR)

The autoregression (AR) method models the next step observations at prior time steps.

The notation for the model involves specifying the order, e.g. AR(p). For example, AR(1) is a first-order autoregression.

The method is suitable for univariate time series without

Python Code

```
1 # AR example
2 from statsmodels.tsa.ar_model import AutoReg
3 from random import random
4 # contrived dataset
5 data = [x + random() for x in range(1, 100)]
6 # fit model
7 model = AutoReg(data, lags=1)
8 model_fit = model.fit()
9 # make prediction
10 yhat = model_fit.predict(len(data), len(data))
11 print(yhat)
```

More Information

- [statsmodels.tsa.ar_model.AutoReg API](#)
- [statsmodels.tsa.ar_model.AutoRegResults API](#)
- [Autoregressive model on Wikipedia](#)

Moving Average (MA)

The moving average (MA) method models the next step in the sequence as a linear function of the residual errors from a mean process at prior time steps.

A moving average model is different from calculating the moving average of the time series.

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

Start Machine Learning

The notation for the model involves specifying the order of the model q as a parameter to the MA function, e.g. $MA(q)$. For example, $MA(1)$ is a first-order moving average model.

The method is suitable for univariate time series without trend and seasonal components.

Python Code

We can use the ARMA class to create an MA model and setting a zeroth-order AR model. We must specify the order of the MA model in the order argument.

```
1 # MA example
2 from statsmodels.tsa.arima_model import ARMA
3 from random import random
4 # contrived dataset
5 data = [x + random() for x in range(1, 100)]
6 # fit model
7 model = ARMA(data, order=(0, 1))
8 model_fit = model.fit(dispatch=False)
9 # make prediction
10 yhat = model_fit.predict(len(data), len(data))
11 print(yhat)
```

Start Machine Learning

You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

More Information

- [statsmodels.tsa.arima_model.ARMA API](#)
- [statsmodels.tsa.arima_model.ARMAResults API](#)
- [Moving-average model on Wikipedia](#)

Autoregressive Moving Average (ARMA)

The Autoregressive Moving Average (ARMA) method models the next step in the sequence as a linear function of the observations and residual errors at prior time steps.

It combines both Autoregression (AR) and Moving Average (MA) models.

The notation for the model involves specifying the order for the $AR(p)$ and $MA(q)$ models as parameters to an ARMA function, e.g. $ARMA(p, q)$. An ARIMA model can be used to develop AR or MA models.

The method is suitable for univariate time series without trend and seasonal components.

Python Code

```
1 # ARMA example
2 from statsmodels.tsa.arima_model import ARMA
3 from random import random
4 # contrived dataset
5 data = [random() for x in range(1, 100)]
6 # fit model
7 model = ARMA(data, order=(2, 1))
8 model_fit = model.fit(dispatch=False)
9 # make prediction
10 yhat = model_fit.predict(len(data), len(data))
11 print(yhat)
```

Start Machine Learning

More Information

- [statsmodels.tsa.arima_model.ARMA API](#)
- [statsmodels.tsa.arima_model.ARMAResults API](#)
- [Autoregressive–moving-average model on Wikipedia](#)

Autoregressive Integrated Moving Average (ARIMA)

The Autoregressive Integrated Moving Average (ARIMA) method models the next step in the sequence as a linear function of the differenced observations and residual errors at prior time steps.

It combines both Autoregression (AR) and Moving Average (MA) models as well as a differencing pre-processing step of the sequence to make the sequence stationary.

The notation for the model involves specifying the order of the differencing, the autoregressive parameters to an ARIMA function, e.g. `ARIMA(p, d, q)`, the moving average parameters, MA, and ARMA models.

The method is suitable for univariate time series with trend.

Python Code

```
1 # ARIMA example
2 from statsmodels.tsa.arima_model import ARIMA
3 from random import random
4 # contrived dataset
5 data = [x + random() for x in range(1, 100)]
6 # fit model
7 model = ARIMA(data, order=(1, 1, 1))
8 model_fit = model.fit(dispatch=False)
9 # make prediction
10 yhat = model_fit.predict(len(data), len(data), typ='levels')
11 print(yhat)
```

More Information

- [statsmodels.tsa.arima_model.ARIMA API](#)
- [statsmodels.tsa.arima_model.ARIMAResults API](#)
- [Autoregressive integrated moving average on Wikipedia](#)

Seasonal Autoregressive Integrated Moving-Average (SARIMA)

The Seasonal Autoregressive Integrated Moving Average (SARIMA) method models the next step in the sequence as a linear function of the differenced observations, errors, differenced seasonal observations, and seasonal errors at prior time steps.

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

Start Machine Learning

It combines the ARIMA model with the ability to perform the same autoregression, differencing, and moving average modeling at the seasonal level.

The notation for the model involves specifying the order for the AR(p), I(d), and MA(q) models as parameters to an ARIMA function and AR(P), I(D), MA(Q) and m parameters at the seasonal level, e.g. SARIMA(p, d, q)(P, D, Q)m where “m” is the number of time steps in each season (the seasonal period). A SARIMA model can be used to develop AR, MA, ARMA and ARIMA models.

The method is suitable for univariate time series with trend and/or seasonal components.

Python Code

```
1 # SARIMA example
2 from statsmodels.tsa.statespace.sarimax import SARIMAX
3 from random import random
4 # contrived dataset
5 data = [x + random() for x in range(1, 100)]
6 # fit model
7 model = SARIMAX(data, order=(1, 1, 1), seasonal_order=(1, 1, 1, 1))
8 model_fit = model.fit(dispatch=False)
9 # make prediction
10 yhat = model_fit.predict(len(data), len(data))
11 print(yhat)
```

More Information

- [statsmodels.tsa.statespace.sarimax.SARIMAX API](#)
- [statsmodels.tsa.statespace.sarimax.SARIMAXResults API](#)
- [Autoregressive integrated moving average on Wikipedia](#)

Seasonal Autoregressive Integrated Moving-Average with Exogenous Regressors (SARIMAX)

The Seasonal Autoregressive Integrated Moving-Average with Exogenous Regressors ([SARIMAX](#)) is an extension of the SARIMA model that also includes the modeling of exogenous variables.

Exogenous variables are also called covariates and can be thought of as parallel input sequences that have observations at the same time steps as the original series. The primary series may be referred to as endogenous data to contrast it from the exogenous sequence(s). The observations for exogenous variables are included in the model directly at each time step and are not modeled in the same way as the primary endogenous sequence (e.g. as an AR, MA, etc. process).

The SARIMAX method can also be used to model the subsumed models with exogenous variables, such as ARX, MAX, ARMAX, and ARIMAX.

The method is suitable for univariate time series with trend and/or seasonal components and exogenous variables.

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

Start Machine Learning

Python Code

```
1 # SARIMAX example
2 from statsmodels.tsa.statespace.sarimax import SARIMAX
3 from random import random
4 # contrived dataset
5 data1 = [x + random() for x in range(1, 100)]
6 data2 = [x + random() for x in range(101, 200)]
7 # fit model
8 model = SARIMAX(data1, exog=data2, order=(1, 1, 1), seasonal_order=(0, 0, 0, 0))
9 model_fit = model.fit(dispatch=False)
10 # make prediction
11 exog2 = [200 + random()]
12 yhat = model_fit.predict(len(data1), len(data1), exog=[exog2])
13 print(yhat)
```

More Information

- [statsmodels.tsa.statespace.sarimax.SARIMAX API](#)
- [statsmodels.tsa.statespace.sarimax.SARIMAXResults](#)
- [Autoregressive integrated moving average on Wikipedia](#)

Vector Autoregression (VAR)

The Vector Autoregression (VAR) method models the generalization of AR to multiple parallel time series.

The notation for the model involves specifying the order for the AR(p) model as parameters to a VAR function, e.g. VAR(p).

The method is suitable for multivariate time series without trend and seasonal components.

Python Code

```
1 # VAR example
2 from statsmodels.tsa.vector_ar.var_model import VAR
3 from random import random
4 # contrived dataset with dependency
5 data = list()
6 for i in range(100):
7     v1 = i + random()
8     v2 = v1 + random()
9     row = [v1, v2]
10    data.append(row)
11 # fit model
12 model = VAR(data)
13 model_fit = model.fit()
14 # make prediction
15 yhat = model_fit.forecast(model_fit.y, steps=1)
16 print(yhat)
```

More Information

- [statsmodels.tsa.vector_ar.var_model.VAR API](#)

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

It is

Start Machine Learning

- [statsmodels.tsa.vector_ar.var_model.VARResults API](#)
- [Vector autoregression on Wikipedia](#)

Vector Autoregression Moving-Average (VARMA)

The Vector Autoregression Moving-Average (VARMA) method models the next step in each time series using an ARMA model. It is the generalization of ARMA to multiple parallel time series, e.g. multivariate time series.

The notation for the model involves specifying the order for the AR(p) and MA(q) models as parameters to a VARMA function, e.g. VARMA(p, q). A VARMA model can also be used to develop VAR or VMA models.

The method is suitable for multivariate time series with

Python Code

```
1 # VARMA example
2 from statsmodels.tsa.statespace.varmax import VARMAX
3 from random import random
4 # contrived dataset with dependency
5 data = list()
6 for i in range(100):
7     v1 = random()
8     v2 = v1 + random()
9     row = [v1, v2]
10    data.append(row)
11 # fit model
12 model = VARMAX(data, order=(1, 1))
13 model_fit = model.fit(dispatch=False)
14 # make prediction
15 yhat = model_fit.forecast()
16 print(yhat)
```

Start Machine Learning

You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

More Information

- [statsmodels.tsa.statespace.varmax.VARMAX API](#)
- [statsmodels.tsa.statespace.varmax.VARMAXResults](#)
- [Vector autoregression on Wikipedia](#)

Vector Autoregression Moving-Average with Exogenous Regressors (VARMAX)

The Vector Autoregression Moving-Average with Exogenous Regressors (VARMAX) is an extension of the VARMA model that also includes the modeling of exogenous variables. It is a multivariate version of the VARMAX method.

Exogenous variables are also called covariates and can be thought of as parallel input sequences that have observations at the same time steps as the original series. The primary series(es) are referred to as endogenous data to contrast it from the exogenous series.

Start Machine Learning

variables are included in the model directly at each time step and are not modeled in the same way as the primary endogenous sequence (e.g. as an AR, MA, etc. process).

The VARMAX method can also be used to model the subsumed models with exogenous variables, such as VARX and VMAX.

The method is suitable for multivariate time series without trend and seasonal components with exogenous variables.

Python Code

```
1 # VARMAX example
2 from statsmodels.tsa.statespace.varmax import
3 from random import random
4 # contrived dataset with dependency
5 data = list()
6 for i in range(100):
7     v1 = random()
8     v2 = v1 + random()
9     row = [v1, v2]
10    data.append(row)
11 data_exog = [x + random() for x in range(100)]
12 # fit model
13 model = VARMAX(data, exog=data_exog, order=(1, 1))
14 model_fit = model.fit(dispatch=False)
15 # make prediction
16 data_exog2 = [[100]]
17 yhat = model_fit.forecast(exog=data_exog2)
18 print(yhat)
```

Start Machine Learning

You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

More Information

- [statsmodels.tsa.statespace.varmax.VARMAX API](#)
- [statsmodels.tsa.statespace.varmax.VARMAXResults](#)
- [Vector autoregression on Wikipedia](#)

Simple Exponential Smoothing (SES)

The Simple Exponential Smoothing (SES) method models the next time step as an exponentially weighted linear function of observations at prior time steps.

The method is suitable for univariate time series without trend and seasonal components.

Python Code

```
1 # SES example
2 from statsmodels.tsa.holtwinters import SimpleExpSmoothing
3 from random import random
4 # contrived dataset
5 data = [x + random() for x in range(1, 100)]
6 # fit model
7 model = SimpleExpSmoothing(data)
8 model_fit = model.fit()
9 # make prediction
```

Start Machine Learning

```
10 yhat = model_fit.predict(len(data), len(data))
11 print(yhat)
```

More Information

- [statsmodels.tsa.holtwinters.SimpleExpSmoothing API](#)
- [statsmodels.tsa.holtwinters.HoltWintersResults API](#)
- [Exponential smoothing on Wikipedia](#)

Holt Winter's Exponential Smoothing (HWES)

The Holt Winter's Exponential Smoothing (HWES) also called the Triple Exponential Smoothing method models the next time step as an exponentially weighted linear function of observations at prior time steps, taking trends and seasonality into account.

The method is suitable for univariate time series with trend and seasonality.

Python Code

```
1 # HWES example
2 from statsmodels.tsa.holtwinters import ExponentialSmoothing
3 from random import random
4 # contrived dataset
5 data = [x + random() for x in range(1, 100)]
6 # fit model
7 model = ExponentialSmoothing(data)
8 model_fit = model.fit()
9 # make prediction
10 yhat = model_fit.predict(len(data), len(data))
11 print(yhat)
```

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

More Information

- [statsmodels.tsa.holtwinters.ExponentialSmoothing API](#)
- [statsmodels.tsa.holtwinters.HoltWintersResults API](#)
- [Exponential smoothing on Wikipedia](#)

Further Reading

This section provides more resources on the topic if you are looking to go deeper.

- [Statsmodels: Time Series analysis API](#)
- [Statsmodels: Time Series Analysis by State Space Methods](#)

Summary

In this post, you discovered a suite of classical time series forecasting methods that you can test and tune on your time series dataset.

Start Machine Learning

Did I miss your favorite classical time series forecasting method?

Let me know in the comments below.


Did you try any of these methods on your dataset?

Let me know about your findings in the comments.

Do you have any questions?

Ask your questions in the comments below and I will do my best to answer.

Want to Develop Time Series Forecasts with Python?

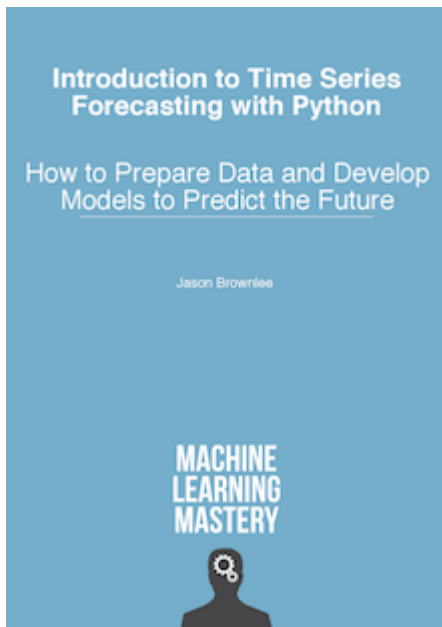

Develop

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

Skip the Academics. Just Results.

SEE WHAT'S INSIDE

Tweet

Share

Share



About Jason Brownlee

Jason Brownlee, PhD is a machine learning specialist who teaches developers how to get results with modern machine learning methods via hands-on tutorials.

[View all posts by Jason Brownlee →](#)

[◀ Statistics for Machine Learning \(7-Day Mini-Course\)](#)

[Taxonomy of Time Series Forecasting Problems ▶](#)

Start Machine Learning

247 Responses to 11 Classical Time Series Forecasting Methods in Python (Cheat Sheet)



Adriena Welch August 6, 2018 at 3:20 pm #

REPLY ↩

Hi Jason, thanks for such an excellent and comprehensive post on time series. I sincerely appreciate your effort. As you ask for the further topic, just wondering if I can request you for a specific topic I have been struggling to get an output. It's about Structural Dynamic Factor model (SDFM) by Barigozzi, M., Conti, A., and Luciani, M. (Do euro area countries respond asymmetrically to the common monetary policy) and Mario Forni Luca Gambetti (The Dynamic Factor Approach). Would it be possible for you to go over and just a request from me and sorry if it doesn't go with you



Jason Brownlee August 7, 2018 at 6:23 am #

Thanks for the suggestion. I've not heard

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Akhila March 10, 2020 at 7:17 pm #

REPLY ↩

I have 1000 time series data and i want to predict next 500 steps. So how can i do this



Jason Brownlee March 11, 2020 at 5:22 am #

REPLY ↩

Fit a model then call the predict() function.



Abhi April 8, 2020 at 8:20 pm #

Hi Jason can the above mentioned algorithms can be used for Demand forecasting as well?



Jason Brownlee April 9, 2020 at 8:00 am #

I don't see why not.

Start Machine Learning



Abhishek May 8, 2020 at 8:15 am #

Hi Jason,

Great technical insights. I work in the oil and gas sector and one of our day to day job is to rate vs time oil rate forecasting. We typically use empirical equations and use regression to fit those empirical input parameters. I was wondering if we could use sophisticated ML techniques to accomplish this?

Thanks!



Jason Brownlee May 8, 2020 at 10:00 am #

Thanks.

Yes, perhaps start with the examples here:

<https://machinelearningmastery.com/s>

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Kamal Singh August 6, 2018 at 6:19 pm #

I am working on Time series or Prediction with scratch can you give me the references of this material
Thank you in advance



Jason Brownlee August 7, 2018 at 6:26 am #

REPLY ↩

Sorry, I don't have any materials for matlab, it is only really used in universities.



Catalin August 6, 2018 at 8:50 pm #

REPLY ↩

Hi Jason! From which editor do you import the python code into the webpage of your article? Or what kind of container it that windowed control used to display the python code?



Jason Brownlee August 7, 2018 at 6:26 am #

REPLY ↩

Great question, I explain the software I use for the website here:
<https://machinelearningmastery.com/faq/single-faq/what-software-do-you-use-to-run-your-website>

Start Machine Learning



Mike August 7, 2018 at 2:28 am #

REPLY ↩

Thanks for all the things to try!

I recently stumbled over some tasks where the classic algorithms like linear regression or decision trees outperformed even sophisticated NNs. Especially when boosted or averaged out with each other.

Maybe its time to try the same with time series forecasting as I'm not getting good results for some tasks with an LSTM.



Jason Brownlee August 7, 2018 at 6:30 am #

REPLY ↩

Always start with simple methods before t

The complexity of advanced methods just be justifi

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Elie Kawerk August 7, 2018 at 2:36 am #

Hi Jason,

Thanks for this nice post!

You've imported the sin function from math many times but have not used it.

I'd like to see more posts about GARCH, ARCH and co-integration models.

Best,
Elie



Jason Brownlee August 7, 2018 at 6:30 am #

REPLY ↩

Thanks, fixed.

I have a post on ARCH (and friends) scheduled.



Elie Kawerk August 7, 2018 at 2:38 am #

REPLY ↩

Will you consider writing a follow-up book on advanced time-series models soon?



Jason Brownlee August 7, 2018 at 6:32 am #

REPLY ↩

Start Machine Learning

Yes, it is written. I am editing it now. The title will be “Deep Learning for Time Series Forecasting”.

CNNs are amazing at time series, and CNNs + LSTMs together are really great.



Elie Kawerk August 7, 2018 at 6:40 am #

REPLY ↩

will the new book cover classical time-series models like VAR, GARCH, ..?



Jason Brownlee August 7, 2018 at 2:29 pm #

REPLY ↩

The focus is deep learning (MLP, from classical methods (Naive, SARIMA, E hope to have it done by the end of the mor

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Elie Kawerk August 7, 2018 at 5

This is great news! Don't you time-series models?



Jason Brownlee August 8, 2018 at 6:15 am #

Perhaps generally, but not if you are building a system for operational use. I think Python is a better fit.



Dark7wind August 9, 2018 at 7:16 am #

Great to hear this news. May I ask if the book also cover the topic of multivariate and multistep?



Jason Brownlee August 9, 2018 at 7:34 am #

Yes, there are many chapters on multi-step and most chapters work with multivariate data.

Start Machine Learning



Ger July 6, 2019 at 5:36 pm #

Well, although it is a really helpful and useful book as it is usually made by Jason, this book does not cover multivariate time series problems, in fact Jason explicitly says "This is not a treatment of complex time series problems. It does not provide tutorials on advanced topics like multi-step sequence forecasts, multivariate time series problems or spatial-temporal prediction problems."



Jason Brownlee July 7, 2019 at 7:49 am #

Correct. I cover complex topics

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees.**
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Søren August 7, 2018 at 10:27 pm #

Sounds amazing that you finally 😊 and when will it be available to buy?



Jason Brownlee August 8, 2018 at 6:20 am #

Thanks. I hope by the end of the month or soon after.



Kalpesh Ghadigaonkar March 5, 2019 at 1:01 am #

REPLY ↩

Hi, Can you help me with Arimax ?



Arun Mishra August 10, 2018 at 5:25 am #

REPLY ↩

I use Prophet.

https://facebook.github.io/prophet/docs/quick_start.html

Also, sometimes FastFourier Transformations gives a good result.



Jason Brownlee August 10, 2018 at 6:21 am #

REPLY ↩

Thanks.

Start Machine Learning



AJ Rader August 16, 2018 at 7:11 am #

REPLY ↩

I would second the use of prophet, especially in the context of shock events — this is where this approach has a unique advantage.



Jason Brownlee August 16, 2018 at 1:56 pm #

REPLY ↩

Thanks for the suggestion.



Naresh May 4, 2019 at 4:28 pm #

Hi, can you pls help to get the method
time .

Start Machine Learning



You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee May 5, 2019 at 6:22 pm #

I have some suggestions here that
<https://machinelearningmastery.com/faq/single-faq/how-to-develop-forecast-models-for-multiple-sites>



User104 May 17, 2019 at 2:24 pm #

REPLY ↩

Hi Arun,

Can you let me know how you worked with fbprophet. I am struggling with the installation of fbprophet module. Since it's asking for c++ compiler. Can you please share how you installed the c++ compiler. I tried all ways to resolve it.

Thanks



Jason Brownlee May 17, 2019 at 2:53 pm #

REPLY ↩

I have not worked with fbprophet, sorry.



TJ Slezak June 5, 2019 at 1:45 am #

REPLY ↩

Start Machine Learning

conda install gcc



Jason Brownlee June 5, 2019 at 8:47 am #

Nice!



Ravi Rokhade August 10, 2018 at 5:19 pm #

REPLY ↩

What are the typical application domain of these classes?



Jason Brownlee August 11, 2018 at 6:06 am #

Forecasting a time series across domains



Alberto Garcia Galindo August 11, 2018 at 12:11 pm #

Hi Jason!

Firstly I congratulate you for your blog. It is helping me a lot in my final work on my bachelor's degree in Statistics!

What are the assumptions for make forecasting on time series using Machine Learning algorithms? For example, it must to be stationary? Thanks!



Jason Brownlee August 11, 2018 at 6:11 am #

REPLY ↩

Gaussian error, but they work anyway if you violate assumptions.

The methods like SARIMA/ETS try to make the series stationary as part of modeling (e.g. differencing).

You may want to look at power transforms to make data more Gaussian.



Neeraj August 12, 2018 at 4:55 pm #

REPLY ↩

Hi Jason

I'm interested in forecasting the temperatures

I'm provided with the previous data of the temperature

Can you suggest me the procedure I should follow in order to solve this problem

Start Machine Learning

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee August 13, 2018 at 6:15 am #

REPLY ↩

Yes, an SARIMA model would be a great place to start.



Den August 16, 2018 at 12:15 am #

REPLY ↩

Hey Jason,

Cool stuff as always. Kudos to you for making me a ML genius!

Real quick:

How would you combine VARMAX with an SVR in pyth

Elaboration.

Right now I am trying to predict a y-value, and have x1

The tricky part is, the rows are grouped.

So, for example.

If the goal is to predict the price of a certain car in the 8
car I have x11_xnm → y1_xm data (meaning that let's
data until m=3 years, for example).

First I divide the data with the 80/20 split, trainset/testset
split?? I chose to split the data based on the car name.

(If this approach is wrong, please tell me) The motivation behind this, is that the 80/20 could otherwise end
up with data of all the cars of which some would have all the years and others would have none of the years.
aka a very skewed distribution.

Then I create a model using an SVR, with some parameters.

And then I try to predict the y-values of a certain car. (value in year m)

However, I do not feel as if I am using the time in my prediction. Therefore, I turned to VARMAX.

Final question(s).

How do you make a time series prediction if you have multiple groups [in this case 1200 cars, each of which
have a variable number of years(rows)] to make the model from?

Am I doing right by using the VARMAX or could you tell me a better approach?

Sorry for the long question and thank you for your patience!

Best,

Den

Start Machine Learning

You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee August 16, 2018 at 6:09 am #

REPLY ↩

You can try model per group or across groups

Start Machine Learning

Compare a suite of ml methods to varmax and use what performs the best on your dataset.



Petrônio Cândido August 16, 2018 at 6:36 am #

REPLY ↩

Hi Jason!

Excellent post! I also would like to invite you to know the Fuzzy Time Series, which are data driven, scalable and interpretable methods to analyze and forecast time series data. I have recently published a python library for that on <http://petroniocandido.github.io/pyFTS/>.

All feedbacks are welcome! Thanks in advance!



Jason Brownlee August 16, 2018 at 1:55 pm

Thanks for sharing.



SuFian AhMad May 15, 2019 at 3:43 pm #

Hello Sir, Can you please share an example of how to implement Fuzzy Logic time series, and I am just a student, so that's why it will be a great help from you if you will help me in this.
I just need a sample code that is written in python.



Chris Phillips August 30, 2018 at 8:19 am #

REPLY ↩

Hi Jason,

Thank you so much for the many code examples on your site. I am wondering if you can help an amateur like me on something.

When I pull data from our database, I generally do it for multiple SKU's at the same time into a large table. Considering that there are thousands of unique SKU's in the table, is there a methodology you would recommend for generating a forecast for each individual SKU? My initial thought is to run a loop and say something to the effect of: For each in SKU run...Then the VAR Code or the SARIMA code.

Ideally I'd love to use SARIMA, as I think this works the best for the data I am looking to forecast, but if that is only available to one SKU at a time and VAR is not constrained by this, it will work as well. If there is a better methodology that you know of for these, I would gladly take this advice as well!

Thank you so much!

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees.**
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

Start Machine Learning



Jason Brownlee August 30, 2018 at 4:49 pm #

REPLY ↩

Yes, I'd encourage you to use this methodology:

<https://machinelearningmastery.com/how-to-develop-a-skilful-time-series-forecasting-model/>



Eric September 6, 2018 at 6:32 am #

REPLY ↩

Great post. I'm currently investigating a state space approach to forecasting. Dynamic Linear Modeling using a Kálmán Filter algorithm (West, Hamilton). There is a python package, pyDLM, that looks promising, but it would be great to hear your thoughts on this approach and this package.



Jason Brownlee September 6, 2018 at 2:07 pm #

Sounds good, I hope to cover state space success but also limited exposure with the method. Not familiar with the lib. Let me know how you go with it.

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Alex Rodriguez April 18, 2019 at 7:30 am #

REPLY ↩

Indeed it's an excellent lib.

I use it almost everyday and it really improved the effectiveness of my forecasts over any other method.



Roberto Tomás September 27, 2018 at 7:38 am #

REPLY ↩

Hi Jason, I noticed using VARMAX that I had to remove seasonality — enforcing stationarity .. now I have test and predictions data that I cannot plot (I can, but it doesn't look right _at all_). I'm wondering if there are any built-ins that handle translation to and from seasonality for me? My notebook is online: <https://nbviewer.jupyter.org/github/robbiemu/location-metric-data/blob/master/appData%20and%20locationData.ipynb>



Jason Brownlee September 27, 2018 at 2:43 pm #

REPLY ↩

Typically I would write a function to perform the transform and a sister function to invert it.

I have examples here:

<https://machinelearningmastery.com/machine-learning/>

Start Machine Learning

Does that help?



Sara October 2, 2018 at 7:36 am #

REPLY ↩

Thanks for your great tutorial posts. This one was very helpful. I am wondering if there is any method that is suitable for multivariate time series with a trend or/and seasonal components?



Jason Brownlee October 2, 2018 at 11:03 am #

REPLY ↩

Yes, you can try MLPs, CNNs and LSTMs.
You can experiment with each with and without data augmentation.



Sara October 3, 2018 at 1:48 am #

Thanks for your respond. I also have a dataset which includes multiple time series variables. I have a dataset which includes multiple time series variables that these variables are not dependent on each other. I tried VAR for the pair of variables, I expected to get better prediction (of time series) but VAR provides much better prediction. Do you have any thought why?

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee October 3, 2018 at 6:20 am #

REPLY ↩

No, go with the method that gives the best performance.



Eric October 17, 2018 at 9:52 am #

REPLY ↩

Hi Jason,

In the (S/V)ARIMAX procedure, should I check to see if my exogenous regressors are stationary and difference if them if necessary before fitting?

```
Y = data2 = [x + random() for x in range(101, 200)]
```

```
X = data1 = [x + random() for x in range(1, 100)]
```

If I don't, then I can't tell if a change in X is related to a change in Y, or if they are both just trending with time. The time trend dominates as $0 \leq \text{random}() \leq 1$

In R, Hyndman recommends "[differencing] all variables first as estimation of a model with non-stationary errors is not consistent and can lead to "spurious regression".

Start Machine Learning

<https://robjhyndman.com/hyndsight/arimax/>

Does SARIMAX handle this automatically or flag me if I have non-stationary regressors?

Thanks



Jason Brownlee October 17, 2018 at 2:27 pm #

REPLY ↩

No, the library will not do this for you. Differencing is only performed on the provided series, not the exogenous variables.

Perhaps try with and without and use the approach that results in the lowest forecast error for your specific dataset.



Andrew K October 23, 2018 at 9:09 am #

Hi Jason,

Thank you for this wonderful tutorial.

I do have a question regarding data that isn't continuous during daylight hours. How would you approach a time series behavior? Fill non-daylight hour data with 0's or nan's?

Thanks.

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee October 23, 2018 at 2:25 pm #

REPLY ↩

I'd encourage you to test many different framings of the problem to see what works.

If you want to make data contiguous, I have some ideas here:

<https://machinelearningmastery.com/handle-missing-timesteps-sequence-prediction-problems-python/>



Khalifa Ali October 23, 2018 at 4:48 pm #

REPLY ↩

Hey..

Kindly Help us in making hybrid forecasting techniques.

Using two forecasting technique and make a hybrid technique from them.

Like you may use any two techniques mentioned above and make a hybrid technique form them.

Thanks.

Start Machine Learning



Jason Brownlee October 24, 2018 at 6:25 am #

REPLY ↩

Sure, what problem are you having with using multiple methods exactly?



Mohammad Alzyout October 31, 2018 at 6:25 pm #

REPLY ↩

Thank you for your excellent and clear tutorial.

I wondered which is the best way to forecast the next second Packet Error Rate in DSRC network for safety messages exchange between vehicles to decide the best distribution over Access Categories of EDCA.

I hesitated to choose between LSTM or ARMA method

Could you please guide me to the better method of the

Kindly, note that I'm beginner in both methods and war
don't have enough time to learn both methods especia

Thank you in advance.

Best regards,
Mohammad.

Start Machine Learning



You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee November 1, 2018 at 6:03 am #

REPLY ↩

I recommend testing a suite of methods in order to discover what works best for your specific problem.



Jawad November 8, 2018 at 12:33 am #

REPLY ↩

Hi Jason,

Thanks for great post. I have 2 questions. First, is there a way to calculate confidence intervals in HWES, because i could not find any way in the documentation. And second, do we have something like 'nnetar' R's neural network package for time series forecasting available in python.

Regards



Jason Brownlee November 8, 2018 at 6:10 am #

REPLY ↩

I'm not sure if the library has a built in confidence interval, you could calculate it yourself:
<https://machinelearningmastery.com/confidence-intervals-for-machine-learning/>

What is "nnetar"?

Start Machine Learning



joao May 4, 2020 at 3:50 am #

REPLY ↩

<https://www.rdocumentation.org/packages/forecast/versions/8.12/topics/nnetar>



Jawad Iqbal November 22, 2018 at 8:46 am #

REPLY ↩

Thanks for your reply Jason. "nnetar" is a function in R, <https://www.rdocumentation.org/packages/forecast/versions/8.4/topics/nnetar> it is used for time series forecasting. I could not find an but now i am using your tutorial of LSTM for time series. And i am facing an issue that my data points are 750. i.e. feed the one step forecast back to the new forecast repetition of my data. Forecast look just like the cyclic missing.



Jason Brownlee November 22, 2018 at 2:08

Perhaps try this tutorial:

<https://machinelearningmastery.com/how-to-develop-lstm-models-for-time-series-forecasting/>

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Rima December 4, 2018 at 9:59 pm #

REPLY ↩

Hi Jason,

Thank you for this great post!

In VARMAX section, at the end you wrote:

"The method is suitable for univariate time series without trend and seasonal components and exogenous variables."

I understand from the description of VARMAX that it takes as input, multivariate time series and exogenous variables. No?

Another question, can we use the seasonal_decompose

(https://www.statsmodels.org/dev/generated/statsmodels.tsa.seasonal.seasonal_decompose.html) function in python to remove the seasonality and transform our time series to stationary time series? If so, is the result residual (output of seasonal_decompose) is what are we looking for?

Thanks!

Rima

Jason Brownlee December 5, 2018 at 6:16 a

Start Machine Learning



Thanks, fixed.



Rima December 11, 2018 at 9:36 pm #

REPLY ↩

What about Seasonal_decompose method? Do we use residual result or the trend?



Jason Brownlee December 12, 2018 at 5:53 am #

REPLY ↩

Sorry, I don't understand, perhaps you can elaborate your question?



Rima December 12, 2018 at 7:36 pm #

The seasonal_decompose function splits the original data, the seasonal component and the trend component. Which component should we use to forecast the seasonal component?

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee December 13, 2018 at 7:50 am #

I generally don't recommend using the decomposed elements in forecasting. I recommend performing the transforms on your data yourself.



Lucky December 5, 2018 at 12:49 am #

REPLY ↩

Hi Jason,

Could you please help me list down the names of all the models available to forecast a univariate time series?

Thanks!



Jason Brownlee December 5, 2018 at 6:18 am #

REPLY ↩

Does the above post not help?

Start Machine Learning



Jane December 6, 2018 at 5:21 am #

REPLY ↩

Hi Jason,

Thank you this was super helpful!

For the AR code, is there any modification I can make so that model predicts multiple periods as opposed to the next one? For example, if am using a monthly time series, and have data up until August 2018, the AR predicts September 2018. Can it predict September 2018, October, 2018, and November 2018 based on the same model and give me these results?



Jason Brownlee December 6, 2018 at 6:03 am #

Yes, you can specify the interval for which



Jane December 7, 2018 at 3:29 am #

How might I go about doing that? I have not found a variable that allows this

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee December 7, 2018 at 5:25 am #

REPLY ↩

The interval is specified either to the forecast() or the predict() method, I given an example here that applies to most statsmodels forecasting methods:

<https://machinelearningmastery.com/make-sample-forecasts-arima-python/>



Esteban December 21, 2018 at 6:56 am #

REPLY ↩

Hi, thank you so much for your post.

I have a question, have you used or have you any guidelines for the use of neural networks in forecasting time series, using CNN and LSTM both together?



Jason Brownlee December 21, 2018 at 3:15 pm #

REPLY ↩

Yes, I have many examples and a book on the topic. You can get started here:

https://machinelearningmastery.com/start-here/#deep_learning_time_series

Start Machine Learning



mk December 22, 2018 at 10:34 pm #

REPLY ↩

All methods have common problems. In real life, we do not need to predict the sample data. The sample data already contains the values of the next moment. The so-called prediction is only based on a difference, time lag. That is to say, the best prediction is performance delay. If we want to predict the future, we don't know the value of the current moment. How do we predict? Or maybe we have collected the present and past values, trained for a long time, and actually the next moment has passed. What need do we have to predict?



Jason Brownlee December 23, 2018 at 6:06 am #

REPLY ↩

You can frame the problem any way you want. You can say, "I want to predict what output you want to predict, then fit a model to it."

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Dr. Omar January 2, 2019 at 1:40 am #

Dear Jason : your post and book look interesting for a stock market or any other symbol, data collected (price for each second) , can you briefly tell how we can use machine learning codes if applied will yield to future data.

can we after inputting our data and producing the plot for the past data , can we extend the time series and get the predicted price for next day/month /year , please explain



Jason Brownlee January 2, 2019 at 6:41 am #

REPLY ↩

This is a common question that I answer here:

<https://machinelearningmastery.com/faq/single-faq/can-you-help-me-with-machine-learning-for-finance-or-the-stock-market>



AD January 4, 2019 at 7:51 pm #

REPLY ↩

Hi Jason,

Thank you for this great post.

I have a requirement of predicting receipt values for open invoices of various customers. I am taking closed invoices – whose receipt amount is used to create training data and open invoices as test data.

Below is the list of columns I will be getting as raw data

For Test Data – RECEIPT_AMOUNT, RECEIPT_DATE will be blank. depicting Open Invoices

For Training Data – Closed Invoices will have receipt amount

Start Machine Learning

CUSTOMER_NUMBER
CUSTOMER_TRX_ID
INVOICE_NUMBER
INVOICE_DATE
RECEIPT_AMOUNT
BAL_AMOUNT
CUSTOMER_PROFILE
CITY_STATE
STATE
PAYMENT_TERM
DUE_DATE
PAYMENT_METHOD
RECEIPT_DATE

It would be a great help if you can guide me which algorithm
method can satisfy this requirement

Thanks,
AD



Jason Brownlee January 5, 2019 at 6:53 am

I recommend the following process for newbies
<https://machinelearningmastery.com/start-here/#process>

Start Machine Learning

You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Marius January 8, 2019 at 7:17 am #

REPLY ↩

Hi Jason,

Are STAR models relevant here as well?

Kindest
Marius



Jason Brownlee January 8, 2019 at 11:12 am #

REPLY ↩

What are star models?



Kostyantyn Kravchenko June 27, 2019 at 8:53 pm #

REPLY ↩

Start Machine Learning

Hi Jason, STAR models are Space-Time Autoregression models. I have the same question. I have a multivariate time-series with additional spatial dimension: latitude and longitude. So we need to account not only for the time lags but also for the spacial interactions. I'm trying to find a clear example in Python with no luck so far...



Jason Brownlee June 28, 2019 at 6:01 am #

REPLY ↩

What are you're inputs and outputs exactly?



Heracles January 11, 2019 at 8:35 pm #

Hi Jason,

Thanks for this.

I want to forecast whether an event would happen or not. I don't have a binary column in it?

How would I accomplish something like this including time series?

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees.**

Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee January 12, 2019 at 5:40 am #

Sounds like it might be easier to model the problem as time series classification.

I have some examples of activity recognition, which is time series classification that might provide a good starting point:

https://machinelearningmastery.com/start-here/#deep_learning_time_series



Gary Morton January 13, 2019 at 5:00 am #

REPLY ↩

Good morning

A quality cheat sheet for time series, which I took time to re-create and decided to try an augment by adding code snippets for ARCH and GARCH

It did not take long to realize that Statsmodels does not have an ARCH function, leading to a google search that took me directly to:

<https://machinelearningmastery.com/develop-arch-and-garch-models-for-time-series-forecasting-in-python/>

Great work => Thought to include here as I did not see a direct link, sans your above comment on thinking to do an ARCH and GARCH module.

also for reference:

Start Machine Learning

LSTM time series model

<https://machinelearningmastery.com/how-to-develop-lstm-models-for-multi-step-time-series-forecasting-of-household-power-consumption/>

MLP and Keras Time Series

<https://machinelearningmastery.com/time-series-prediction-with-deep-learning-in-python-with-keras/>

Cheers and thank you

-GM



Jason Brownlee January 13, 2019 at 5:45 am #

REPLY ↩

Thanks, and many more here, but neural forecasts volatility:

<https://machinelearningmastery.com/start-here/#de>

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Mahmut COLAK January 14, 2019 at 10:08 am #

Hi Jason,

Thank you very much this paper. I have a time series p dataset include multiple input and one output like multi algorithm is the best solution for my problem?

Thanks.



Jason Brownlee January 14, 2019 at 11:15 am #

REPLY ↩

I have many exmaples you can get started here:

https://machinelearningmastery.com/start-here/#deep_learning_time_series



Mahmut COLAK January 14, 2019 at 10:16 am #

REPLY ↩

Hi Jason,

I have a problem about time series data.

My dataset include multiple input and one output.

Normally it is like multiple linear regression but as additional has timestamp 😞

So i can't find any solution or algorithm.

For example: AR, MA, ARIMA, ARIMAX, VAR, SARIMAX or etc.

Which one is the best for my problem?

Thanks.

Start Machine Learning



Jason Brownlee January 14, 2019 at 11:15 am #

REPLY ↩

I recommend testing a suite of methods and discover what works best for your specific dataset.



RedzCh January 18, 2019 at 11:12 pm #

REPLY ↩

one thing is there any methods to do grouped forecasting by keys or category so you have lots of forecasts , there is this on R to an extent



Jason Brownlee January 19, 2019 at 5:41 am #

I'm not sure I follow, can you elaborate please

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees.**

Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Rodrigo January 18, 2019 at 11:15 pm #

First of all, I have read two of your books(Basic Deep Learning and Time Series Forecasting) and the simplicity with which you explain difficult concepts is brilliant. I'm using the second one to face the problem that I present below.

I'm facing a predicting problem for food alerts. The goal is to predict the variables of the most probable alert in the next x days (also any information I could get about future alerts is really useful for me). Alerts are recorded over time (so it's a time series problem).

The problem is that observations are not uniform over time (not separated by equal time lapses), i.e: since alerts are only recorded when they happen, there can be one day without alerts and another with 50 alerts. As you indicate in your book, it is a discontinuous time series.

The entry for the possible model could be the alerts (each alert correctly coded as they are categorical variables) of the last x days, but this entry must have a fixed size/format. Since the time windows don't have the same number of alerts, I don't know what is the correct way to deal with this problem.

Any data formatting suggestion to make the observations uniform over time?

Or should I just face the problem in a different way (different inputs)?

Thank you for your great work.



Jason Brownlee January 19, 2019 at 5:44 am #

REPLY ↩

Sounds like a great problem!

Start Machine Learning

There are many ways to frame and model the problem and I would encourage you to explore a number and discover what works best.

First, you need to confirm that you have data that can be used to predict the outcome, e.g. is it temporally dependent, or whatever it is dependent upon, can the model get access to that.

Then, perhaps explore modeling it as a time series classification problem, e.g. is the even going to occur in this interval. Explore different interval sizes and different input history sizes and see what works.

Let me know how you go.



Mery January 28, 2019 at 2:33 am #

REPLY ↩

Hello Sir,

Thank you for these information

I have a question.

I wanna know if we can use the linear regression model

Start Machine Learning



You can master applied Machine Learning

without math or fancy degrees.

Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee January 28, 2019 at 7:15 am #

ETS.

You can, but it probably won't perform as well as specialized linear methods like SARIMA or



sunil February 5, 2019 at 5:40 pm #

REPLY ↩

I have time series data,i want to plot the seasonality graph from it. I am familiar with holt-winter. Are there any other methods?



Jason Brownlee February 6, 2019 at 7:38 am #

REPLY ↩

You can plot the series directly to see any seasonality that may be present.



Sai Teja February 11, 2019 at 9:11 pm #

REPLY ↩

Hi Jason Brownlee

like auto_arima function present in the R ,Do we have any functions like that in python for VAR,VARMAX,SES,HWES etc

Start Machine Learning



Jason Brownlee February 12, 2019 at 8:00 am #

REPLY ↩

Yes, I have written a few examples. Perhaps start here:

<https://machinelearningmastery.com/how-to-grid-search-sarima-model-hyperparameters-for-time-series-forecasting-in-python/>



Michal February 13, 2019 at 1:08 am #

REPLY ↩

Thank you, this list is great primer!



Jason Brownlee February 13, 2019 at 8:00 am #

I'm glad it was helpful.



Bilal February 15, 2019 at 8:41 am #

Dear Jason,

Thanks for your valuable afford and explanations in such a simple way...

What about the very beginning models of

- Cumulative
- Naive
- Holt's
- Dampened Holt's
- Double ESM

I would be very good to see the structural developments of the code from simple to more complex one.

Thank you very much in advance.

Best regards,

Bilal

Start Machine Learning



You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee February 15, 2019 at 2:17 pm #

REPLY ↩

Thanks for the suggestion.

Start Machine Learning



Ayoub Benaissa March 2, 2019 at 8:44 am #

REPLY ↩

I was told to build a bayesian regression forecast
which one of these is the best?
because I did not understand "bayesian regression" meaning



Jason Brownlee March 2, 2019 at 9:37 am #

REPLY ↩

Perhaps ask the person who gave you the assignment what they meant exactly?



Rafael March 12, 2019 at 12:46 am #

Thank you, i have a dataset in csv format and
2019, I want to train an artificial neural network in python
dataset in csv format, I was thinking in a MLP, could you

Start Machine Learning



You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee March 12, 2019 at 6:54 am #

Sounds great, you can get started here:
https://machinelearningmastery.com/start-here/#deep_learning_time_series



Venkat March 24, 2019 at 5:00 pm #

REPLY ↩

Dear Jason,

Thank you for your well written quick great info.

Working on one of the banking use cases i.e. Current account and Saving account attrition prediction.

We are using the last 6 months data for training, we need to predict customers whose balance will reduce more than 70% with one exception, as long money invested in the same bank it is fine.

Great, if you could suggest, which models or time series models will be the best options to try in this case?



Jason Brownlee March 25, 2019 at 6:42 am #

REPLY ↩

I recommend this process:
<https://machinelearningmastery.com/how-to-develop-a-skilful-time-series-forecasting-model/>

Start Machine Learning



Augusto O. Rodero March 29, 2019 at 8:08 pm #

REPLY ↩

Hi Jason,

Thank you so much for this post I learned a lot. I am a fan of the ARMAX models in my work as a hydrologist for streamflow forecasting.

I hope you can share something about Gamma autoregressive models or GARMA models which work well even for non-Gaussian time series which the streamflow time series mostly are. Can we do GARMA in python?



Jason Brownlee March 30, 2019 at 6:26 am #

Thanks for the suggestion, I'll look into the



Zack March 30, 2019 at 11:18 pm #

This blog is very helpful to a novice like me. I with some changes to create seasonality for example (randomness thrown in). Linear regression seems to be What am I missing?

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee March 31, 2019 at 9:30 am #

REPLY ↩

You're probably not missing anything.

If a simpler model works, use it!



Andrew April 1, 2019 at 10:01 pm #

REPLY ↩

Hi Jason,

Thank you for all your posts, they are so helpful for people who are starting in this area. I am trying to forecast some data and they recommended me to use NARX, but I haven't found a good implementation in python. Do you know other method implemented in python similar to NARX?



Jason Brownlee April 2, 2019 at 8:11 am #

REPLY ↩

You can use a SARIMAX as a NARX, just

Start Machine Learning



Berta April 19, 2019 at 10:19 pm #

REPLY ↩

Hi Jason,

Thank you for all you share us. it's very helpful.



Jason Brownlee April 20, 2019 at 7:38 am #

REPLY ↩

I'm happy to hear that.



jessy April 20, 2019 at 11:30 am #

sir,

above 11 models are time series forecasting models, in
models...what is the difference.

Start Machine Learning



You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee April 21, 2019 at 8:18 am #

Persistence is a naive model, e.g. "no model".



Naomi May 4, 2019 at 1:55 am #

REPLY ↩

Very good work. Thanks for sharing.

The line in VARMAX "The method is suitable for multivariate time series without trend and seasonal components and exogenous variables." is very confusing.

I guess you mean no trend no seasonal but with exogenous?



Jason Brownlee May 4, 2019 at 7:12 am #

REPLY ↩

Yes, fixed. Thanks!



User104 May 17, 2019 at 2:20 pm #

REPLY ↩

Start Machine Learning

Hi Jason,

Thanks for the post. It was great and easy to understand for a beginner in time series.

I have data of past 4 years of number of users logged in for a day .

I want to predict the number of users for a day per month.

I used ARIMA but I am getting RMSE 2749 and R2 score 60% .

Can you please suggest methods to increase the accuracy as well as RMSE.

Thanks



Jason Brownlee May 17, 2019 at 2:53 pm #

REPLY ↩

Perhaps try some alternate configurations
Perhaps try using SARIMA to capture any seasonality
Perhaps try ETS?

Start Machine Learning

You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Menghok June 4, 2019 at 9:40 pm #

Hello Jason, thanks for your explanation.

I have a question. What if my data is time series with multiple features? Which model should be used for this? For example, i'm predicting The Air pollution level using the previous observation value of Temperature + Outlook (rain or not).

Thank you.



Jason Brownlee June 5, 2019 at 8:41 am #

REPLY ↩

It is a good idea to encode categorical data, e.g. with an integer, one hot encoding or embedding.



Ramesh July 31, 2019 at 2:34 pm #

REPLY ↩

Hi Menghok, did you get any luck in implementing forecasting problem when you have one more categorical variable in dataset



Prasanna June 17, 2019 at 3:45 pm #

REPLY ↩

Start Machine Learning

Hi Jason,
Thanks for the great post again, wonderful learning experience.
Do you have R codes for the time series methods you described in your article?
or Can you suggest me a good source where can i get R codes to learn some of these methods?
Thanks



Jason Brownlee June 18, 2019 at 6:32 am #

REPLY ↩

Sorry, I don't have R code for time series, perhaps you can start here:
<https://machinelearningmastery.com/books-on-time-series/>



Ibrahim Rashid June 18, 2019 at 8:39 pm #

Thanks for the post. Please do check out Anticipy using Python and developed by Sky.

The goal of Anticipy is to provide reliable forecasts for user effort.

Anticipy can handle trend as well as multiple seasonal

There is built-in support for holiday calendars, and a framework for users to define their own event calendars. The tool is tolerant to data with gaps and null values, and there is an option to detect outliers and exclude them from the analysis.

Ease of use has been one of our design priorities. A user with no statistical background can generate a working forecast with a single line of code, using the default settings. The tool automatically selects the best fit from a list of candidate models, and detects seasonality components from the data. Advanced users can tune this list of models or even add custom model components, for scenarios that require it. There are also tools to automatically generate interactive plots of the forecasts (again, with a single line of code), which can be run on a Jupyter notebook, or exported as .html or .png files.

Check it out here:

<https://pypi.org/project/anticipy/>

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees.**
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee June 19, 2019 at 7:52 am #

REPLY ↩

Thanks for the note.



Min June 19, 2019 at 7:46 am #

REPLY ↩

Hi Jason,

Start Machine Learning

Thanks for this great post!

I have a question for time series forecasting. Have you heard about Dynamic Time Warping? As far as I know, this is a method for time series classification/clustering, but I think it can also be used for forecasting based on the similar time series. What do you think about this method compared to ARIMA? Do you think it will be better if I combine both two methods? For example, use DTW to group similar time series and then use ARIMA for each group?

Thanks



Jason Brownlee June 19, 2019 at 8:20 am #

REPLY ↩

I don't have any posts on the topic, but I h

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees.**
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Ida4526 June 22, 2019 at 7:11 am #

Can you please explain why you use len(data) feature for a while which is for out of sample forecasts smoothing. Apparently, the .predict can be used for in- arguments are start and end, and you use len(data) for or will it just produce a forecast for months in the past?



Jason Brownlee June 22, 2019 at 7:43 am #

REPLY ↩

Great question.

To predict the next or index beyond the known data.

More details here:

<https://machinelearningmastery.com/make-sample-forecasts-arima-python/>



Ida4526 June 25, 2019 at 1:03 am #

REPLY ↩

Thanks for the reply! I was reading through the explanation in your linked article and it was great. Can the .predict() do multiple periods in the future like .forecast? I was using .forecast(12) for forecasting 12 months into the future.



Ida4526 June 25, 2019 at 1:17 am #

REPLY ↩

Start Machine Learning

EDIT: Dumb question- did not read until the end. If you got time, check out my stack post though: <https://stackoverflow.com/questions/56709745/statsmodels-operands-could-not-be-broadcast-together-in-pandas-series> . I think i found some error in statsmodels as the error is thrown in the .forecast function as it wants me to specify a frequency. I found the potential misstep by reading through the actual code for ExponentialSmoothing and it was the only part that really referenced the frequency. Its either that, or my noob is really showing.



Jason Brownlee June 25, 2019 at 6:27 am #

Perhaps this code example will help:

<https://machinelearningmastery.com/h...>
[time-series-forecasting-in-python/](https://machinelearningmastery.com/h...)



karim June 23, 2019 at 9:05 pm #

Hi Jason,

Thanks for all of your awesome tutorial.

Can you please provide any link of your tutorial which I can follow with a statistical model like VAR?

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee June 24, 2019 at 6:27 am #

REPLY ↩

I do not have a tutorial on VAR, sorry.



karim June 25, 2019 at 7:00 am #

REPLY ↩

OK, thanks for your reply. Hopefully, if you can manage time will come with a tutorial on VAR for us.



qwizak July 2, 2019 at 10:56 pm #

REPLY ↩

Hi Jason, do you cover all these models using a real dataset in your book?



Jason Brownlee July 3, 2019 at 8:33 am #

REPLY ↩

Start Machine Learning

I focus on AR/ARIMA in the intro book and SARIMA/ETS+deep learning in the deep learning time series book.



Shabnam July 3, 2019 at 11:26 pm #

REPLY ↩

Hi Jason,

Thanks for the helpful tutorial. I've been trying to solve a sales forecast problem but haven't been any successful. The data is the monthly records of product purchases (counts) with their respective prices for ten years. The records do not show either a significant auto-correlation for a wide range of lags or seasonality. The records are stationary though.

Among the time series models, I have tried (S)ARIMA, simple LSTM. I have also tried regression models using product price. Unfortunately, no method has led to an R^2 is always negative.

My questions are:

- * What category of problems is this problem more relevant to?
- * Do you have any suggestions for possibly suitable approaches?

Thank you in advance.

Shabnam

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee July 4, 2019 at 7:49 am #

REPLY ↩

Perhaps the time series is not predictable?



Shabnam July 8, 2019 at 11:04 pm #

REPLY ↩

I guess that might be the case. I'm also guessing that maybe I don't have sufficiently relevant explanatory variables to obtain a good regression model. Thanks for your feedback though. And, thanks again for your very helpful tutorials.

Shabnam



Jason Brownlee July 9, 2019 at 8:11 am #

REPLY ↩

You're welcome.

Start Machine Learning



George July 9, 2019 at 1:05 am #

REPLY ↩

Hello Jason,

Do you know if there any way to randomly sample a fitted VARMA time series using the statsmodel library. Just like using the sm.tsa.arma_generate_sample for the ARMA. I cant seem to see this how this is done anywhere.



Jason Brownlee July 9, 2019 at 8:12 am #

REPLY ↩

Not off hand, sorry.



Manjinder Singh July 11, 2019 at 9:06 pm #

Hello Jason,

It is really nice and informative article.

I am having network data and in that data there are different parameters down the network. From the lot of parameters one is network traffic crosses a certain threshold at certain location. I want to know when network traffic is crossing threshold value at a particular place. measures prior to occurrence of that parameter at that place.

So please can you suggest me appropriate model for this problem.

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee July 12, 2019 at 8:41 am #

REPLY ↩

Perhaps it might be interesting to explore modeling the problem as a time series classification?



Juan Flores July 11, 2019 at 9:56 pm #

REPLY ↩

Hi, Jason,

We've been having trouble with statsmodels' ARIMA. It just doesn't work and takes forever. What can you tell us about these issues? Do you know of any alternatives to statsmodels?

ThX,

Juan

Jason Brownlee July 12, 2019 at 8:43 am #

Start Machine Learning



Perhaps try a sklearn linear regression model directly?



Juan J. Flores July 13, 2019 at 10:47 pm #

REPLY ↩

Dear Jason,

Thanks for the answer.

Of course there are many regression models available in sklearn. The point is that statsmodels seems to fail miserably, both in time and accuracy. That is, with respect to their arima (family) set of functions.

Question is if you know an alternative python library that works well. Mathematica even better. At the moment, we have not found a sound Python library for a

Have a good one.

Juan

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee July 14, 2019 at 8

I see, good question.

I have found the statsmodels implementation to be reliable, but only if the data is sensible and only if the order is modest.

I cannot recommend another library at this time. R may be slightly more reliable, but is not bulletproof.



Juan Jose Flores October 10, 2019 at 9:53 pm #

Thanks, Jason.

We ended up running everything on Mathematica. It works way better. A more robust python library for ARIMA models is needed.

Best,

Juan



Jason Brownlee October 11, 2019 at 6:18 am #

Nice work!

Start Machine Learning

I agree.



Manjinder Singh July 12, 2019 at 7:12 pm #

REPLY ↩

In time series classification when I am plotting it is showing day wise data . For an instance if i am taking data of past 1 month and applying Autoregression time series classification on it then i am not able to fetch detailed outputs from that chart. From detailed output I mean that 1 incident is occurring number of times in a day so I want visibility in such a way so that everytime an incident occur it should be noticed on that plot.

Is there any precise way by which I can do it.I would be really thankful if you would help me.

Thank you



Jason Brownlee July 13, 2019 at 6:54 am #

Perhaps resample the data to daily before
model data this way or only view forecasts this way



Berns B. August 8, 2019 at 9:40 am #

I can't seem to make VAR work? Gives me a lot of errors?

ValueError Traceback (most recent call last)

in ()

11 # fit model

12 model = VAR(data)

—> 13 model_fit = model.fit()

14 # make prediction

15 yhat = model_fit.forecast(model_fit.y, steps=1)

D:\Users\Berns\Anaconda3\envs\time_series_p27\lib\site-

packages\statsmodels\tsa\vector_ar\var_model.py in fit(self, maxlags, method, ic, trend, verbose)

644 self.data.xnames[k_trend:])

645

—> 646 return self._estimate_var(lags, trend=trend)

647

648 def _estimate_var(self, lags, offset=0, trend='c'):

D:\Users\Berns\Anaconda3\envs\time_series_p27\lib\site-

packages\statsmodels\tsa\vector_ar\var_model.py in _estimate_var(self, lags, offset, trend)

666 exog = None if self.exog is None else self.exog[offset:]

667 z = util.get_var_endog(endog, lags, trend=trend,

—> 668 has_constant='raise')

Start Machine Learning



You can master applied Machine Learning
without math or fancy degrees.

Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

Start Machine Learning

669 if exog is not None:

670 # TODO: currently only deterministic terms supported (exoglags==0)

D:\Users\Berns\Anaconda3\envs\time_series_p27\lib\site-packages\statsmodels\tsa\vector_ar\util.pyc in
get_var_endog(y, lags, trend, has_constant)

36 if trend != 'nc':

37 Z = tsa.add_trend(Z, prepend=True, trend=trend,

—> 38 has_constant=has_constant)

39

40 return Z

D:\Users\Berns\Anaconda3\envs\time_series_p27\lib\site-packages\statsmodels\tsa\tsatools.pyc in

add_trend(x, trend, prepend, has_constant)

97 col_const = x.apply(safe_is_const, 0)

98 else:

—> 99 ptp0 = np.ptp(np.asanyarray(x), axis=0)

100 col_is_const = ptp0 == 0

101 nz_const = col_is_const & (x[0] != 0)

D:\Users\Berns\Anaconda3\envs\time_series_p27\lib\statsmodels\tsa\tsatools.py in
axis, out, keepdims)

2388 else:

2389 return ptp(axis=axis, out=out, **kwargs)

-> 2390 return _methods._ptp(a, axis=axis, out=out, **

2391

2392

D:\Users\Berns\Anaconda3\envs\time_series_p27\lib\site-packages\numpy\core_methods.pyc in _ptp(a,
axis, out, keepdims)

151 def _ptp(a, axis=None, out=None, keepdims=False):

152 return um.subtract(

—> 153 umr_maximum(a, axis, None, out, keepdims),

154 umr_minimum(a, axis, None, None, keepdims),

155 out

ValueError: zero-size array to reduction operation maximum which has no identity

Start Machine Learning

You can master applied Machine Learning

without math or fancy degrees.

Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee August 8, 2019 at 2:21 pm #

REPLY ↩

Sorry, I'm not sure about the cause of your error.

Perhaps confirm statsmodels is up to date?



Berns B. August 8, 2019 at 12:25 pm #

REPLY ↩

Start Machine Learning

By the way Doc Jason, I just bought your book today this morning. I have a huge use case for a time series at work I can use them for.



Jason Brownlee August 8, 2019 at 2:21 pm #

REPLY ↩

Thanks, you have a lot of fun ahead!

I'm here to help if you have questions, email me directly:

<https://machinelearningmastery.com/contact/>



Berns B. August 8, 2019 at 1:19 pm #

Darn indentions! Now code works.

```
# VAR example
from statsmodels.tsa.vector_ar.var_model import VAR
from random import random
# contrived dataset with dependency
data = list()
for i in range(100):
    v1 = i + random()
    v2 = v1 + random()
    row = [v1, v2]
    data.append(row)
# fit model
model = VAR(data)
model_fit = model.fit()
# make prediction
yhat = model_fit.forecast(model_fit.y, steps=1)
print(yhat)
```

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees.**
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee August 8, 2019 at 2:22 pm #

REPLY ↩

I'm very happy to hear that.

More on how copy code from posts here:

<https://machinelearningmastery.com/faq/single-faq/how-do-i-copy-code-from-a-tutorial>



soumyajit August 20, 2019 at 6:27 pm #

REPLY ↩

Start Machine Learning

Jason , need one clarification , for a SARIMAX model or in general in timeseries model, should I use .forecast or .predict ? I have got some differences in result using this two . Please suggest should we use .forecast for train and test (to get the model fitted values) or should we use .predict for train and test (to get the model fitted values) . Also for future forecast what need to be used ? Please suggest.



Jason Brownlee August 21, 2019 at 6:38 am #

REPLY ↩

Either, they both do the same thing.



Kristen September 24, 2019 at 1:27 am #

Hi Jason,

GREAT article. I've been looking for an overview like the one you are working on. I've got a small grocery distribution company with many products/SKU numbers. I'm struggling with how to produce models for different types of time-series trends and seasonalities. ARIMA works but it's a pain of the need to fine tune the parameters. I would love your advice.

1. Use facebook's prophet for a "good enough" model for most of the seasonalities.
2. Separate the grocery items into 11-20 broader category groups and then produce individual models for all those different categories that can then be applied to each individual sku within that category.

LIMITATIONS:

1. I need this process to be computationally efficient, and a for-loop for 4000 items seems like a horrible way to go about this.

QUESTIONS:

1. Do I have to model sales and NOT item quantities and why is that?
2. Is there a way to cluster the items with unsupervised learning just based off their trend and seasonality? Each item does not have good descriptor category so I don't have much to work with for unsupervised clustering techniques.

Would love to hear any thoughts you have about this type of problem!

Thanks for ALL the helpful content.

Kristen

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee September 24, 2019 at 7:49 am #

REPLY ↩

This will give you some ideas of working with multiple SKUs:
<https://machinelearningmastery.com/faq/single-faq/>

Start Machine Learning

Explore groupings by simple aspects like product category, average sales, average gross in an interval, etc.



Anne Bierhoff October 2, 2019 at 7:45 pm #

REPLY ↩

Hi Jason,

many thanks for the many informative articles.

I have a simulation model of a system which receives a forecast of a time series as input. In my scientific work I would like to examine how the performance of the simulation model behaves in relation to the accuracy of the forecast. So I would like to know how to generate such pseudo forecasts with 95% (very good prediction) for my time series.

How would you recommend me to generate such pseudo forecasts? Maybe adjusting a mediocre prediction in a certain way?

Thanks and best regards

Anne

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee October 3, 2019 at 6:44 am

Not sure I follow, sorry.

What specific problem are you having exactly?



Anne Bierhoff October 4, 2019 at 12:25 am #

REPLY ↩

Excuse me, it was also written a bit misleading.

My problem is that my simulation model receives forecasted time series as input, from which I know from publication papers that they are 95% predictable with a lot of effort and large amounts of training data.

Simple predictions like the ones I make, however, only reach about 80%. Nevertheless, I would like to analyze for my scientific work how much the quality of the simulation model depends on the quality of the forecasts. For example, to say whether the effort for good forecasts is worth it. Is there a way to make pseudo forecasts of time series for this purpose? As a basis the actual data and the forecast data are available with 80% accuracy.

Thanks and best regards

Anne

Jason Brownlee October 4, 2019 at 1:11 pm

Start Machine Learning



Yes, why not contrive forecasts as input and contrive expected outputs and control the entire system – e.g. a controlled experiment.

I believe that is required for what you're describing.

If you're new to computational experimental design, perhaps this book will help:

<https://amzn.to/2AFTd7t>



Anne Bierhoff October 4, 2019 at 8:14 am #

Thank you very much. I'll follow up on that tip.

Part of my question also aimed at how
should be as representative as possible
The simplest would be to add normal c
that would be representative if the error
What is your opinion on this issue?

Start Machine Learning

You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee October 4, 2019 at 8:14 am #

A linear model (e.g. linear dep
would approach it.

Or a controllable simplification of the data you will be working with for real, e.g.
trends/seasonality/level changes/etc.



Sadani October 4, 2019 at 8:38 pm #

REPLY ↩

Hey Jason, I have a requirement

I have to perform a regression on a data set that has the following data

Age of Person at time of data collection

Date

cholesterol Level

HDL

Event which can be death etc.

Need to find out if there are any patterns in the Cholesterol Level or the HDL Levels prior to the death event.

I'm trying to do this using Jupyter Notebook. Really appreciate your help sincerely.

Do you have any examples that would be close ?

Start Machine Learning



Jason Brownlee October 6, 2019 at 8:08 am #

REPLY ↩

Sounds like a great problem, perhaps start with some of the simpler tutorials here:
<https://machinelearningmastery.com/start-here/#timeseries>



Jose October 15, 2019 at 3:45 am #

REPLY ↩

Hey Jason! I am working on supply elasticities for crops in California, I am new using python your post has been incredible useful, I have one question for my model I need to develop a time series dynamic model particularly an Autoregressive Distributed Lag (ARDL) Model do you have any material related to how perform this type of models on python?

Thanks!

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees**.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee October 15, 2019 at 6:19 am #

Sorry, I have not seen this model in Python

If you can't locate, perhaps you can implement it in another language?

Why do you need that specific model?



Burcu October 22, 2019 at 11:51 pm #

REPLY ↩

Hi Jason,

Actually I am very impatient and did not read all the comments but that that you already knew them 😊

I need to make a hierarchical and grouped time series in Python.

I need to predict daily & hourly passenger unit by continent or vessel name. I investigated but did not find a solution, could you please direct me what can I do.

Below are my inputs for the model.

Date & Time Vessel Name Continent Passenger Unit

Thank you,



Jason Brownlee October 23, 2019 at 6:49 am #

REPLY ↩

Perhaps start by fitting one model per "vessel"?

Then later perhaps try fitting models across vessel

Start Machine Learning

For simple linear models you can start here:
<https://machinelearningmastery.com/start-here/#timeseries>

For advanced models you can start here:
https://machinelearningmastery.com/start-here/#deep_learning_time_series



Praveen November 13, 2019 at 12:53 am #

REPLY ↩

Hi Jason,

While forecasting in VAR or VARMAX I'm not getting the future timestamp associated with it?

Won't model provide us the future timestamp?



Jason Brownlee November 13, 2019 at 5:47 #

You will know it relative to the end of your

Start Machine Learning

You can master applied Machine Learning
without math or fancy degrees.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Prem November 13, 2019 at 3:53 pm #

Hi Jason,

For the simple AR model yhat values is it possible to get the threshold?

```
data = [x + random() for x in range(1, 100)]
```

```
model = AR(data)
```

```
model_fit = model.fit()
```

```
yhat = model_fit.predict(len(data), len(data))
```

Thanks



Jason Brownlee November 14, 2019 at 7:57 am #

REPLY ↩

What threshold?



Prem November 14, 2019 at 3:56 pm #

REPLY ↩

The forecast, lowerbound and upperbound?

Jason Brownlee November 15, 2019 at 10:00 am #

Start Machine Learning



I think you might be referring to the prediction interval.

This gives an example:

<https://machinelearningmastery.com/time-series-forecast-uncertainty-using-confidence-intervals-python/>



Markus December 2, 2019 at 12:08 am #

REPLY ↩

Hi

Looking at the AR.predict documentation here:

http://www.statsmodels.org/dev/generated/generated/s.tsa.ar_model.AR.predict

With the given parameters as params, start, end and d you have as:

```
yhat = model_fit.predict(len(data), len(data))
```

For which exact documented parameters do you pass

Thanks.

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee December 2, 2019 at 6:04 am #

REPLY ↩

That makes a single step prediction for the next time step at the end of the data.

Alternately, you can use `model.forecast()` in some cases/models.



Nikhil Gupta December 4, 2019 at 6:46 pm #

REPLY ↩

Thanks Jason. This post is really awesome.

I see that you are using random function to generate the data sets. Can you suggest any pointers where I can get real data sets to try out these algorithms. If possible IoT data sets would be preferable.



Jason Brownlee December 5, 2019 at 6:40 am #

REPLY ↩

Yes, right here:

https://machinelearningmastery.com/faq/single-faq/where-can-i-get-a-dataset-on-____

Start Machine Learning



Juni December 12, 2019 at 12:47 pm #

REPLY ↩

Hey

It is really great to see all this stuff.

Can you please explain me:

which algorithm should i use when i want to predict the voltage of a battery:ie...

battery voltage is recorded from 4.2 to 3.7 is 6 months which algorithm will be the best one to predict the next 6 months



Jason Brownlee December 12, 2019 at 1:45

Good question, this will help:

<https://machinelearningmastery.com/how-to-develop>

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



jhon December 18, 2019 at 3:55 pm #

Buenas tardes, se podría utilizar el walk forward validation es decir una variable Target y varias variables input, y es mi pregunta, saben de algún link o tutoría



Jason Brownlee December 19, 2019 at 6:21 am #

REPLY ↩

Yes, the same walk-forward validation approach applies and you can evaluate each variate separately or all together if they have the same units.



A. January 13, 2020 at 12:57 am #

REPLY ↩

Hi,

Have you ever evaluated the performance of Gaussian processes for time series forecast? Do you have any material on this (or plan to make a post about this)?

It's probably not a "classical" method though.

Thanks!



Jason Brownlee January 13, 2020 at 8:21 am

REPLY ↩

Start Machine Learning

I do not. I hope to cover it in the future.



Pallavi February 17, 2020 at 4:19 pm #

REPLY ↩

Hi Jason,

I'm currently working on a sales data set which has got date, location, item and the unit sales. Time period is 4 yrs data, need to forecast sales for subsequent year -1 month(1-jan to 15 jan). Kindly suggest a model for this multivariate data. Another challenge which i'm currently facing is working with google collab with restricted RAM size of 25 GB and the data set size is 1M rows.

Please suggest a good model which will handle the memory size as well.

Note: I have change the datatype to reduce the memom

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees.**

Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee February 18, 2020 at 6:17 am #

I recommend this process:

<https://machinelearningmastery.com/how-to-develop>



Amit Patidar March 5, 2020 at 8:27 pm #

Can you briefly explain about Fbprophet, it's pros and cons etc.



Jason Brownlee March 6, 2020 at 5:31 am #

REPLY ↩

Thanks for the suggestion.

I have a tutorial on the topic written, it will appear soon.



Ricardo Reis March 21, 2020 at 2:07 am #

REPLY ↩

Hi Jason,

All these methods seem to focus on two data features:

- evenly spaced time series;
- continuous data.

As it is easy to guess, I have a time series which is both irregular and categorical.

Mine is sensor data. These sensors only detect the presence of a person in a room. Each entry gives me the start time, duration and room. This is for monitoring on their flat.

Start Machine Learning

None of the above methods — fantastically depicted, by the way! — is a glove to this hand. I need to detect patterns, trigger alerts on anomalies and predict future anomalies.

Any suggestions?



Jason Brownlee March 21, 2020 at 8:27 am #

REPLY ↩

Yes, see this:

<https://machinelearningmastery.com/faq/single-faq/how-do-i-handle-discontiguous-time-series-data>



William March 22, 2020 at 1:38 am #

I have error executing VARMAX

“ValueError: endog and exog matrices are different size”



Jason Brownlee March 22, 2020 at 6:56 am #

Perhaps confirm that the inputs to your model are correct

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Artur March 22, 2020 at 1:42 am #

REPLY ↩

Hello,

Are you sure the code is well-formatted ?

```
”  
for i in range(100):  
v1 = random()  
“
```



Jason Brownlee March 22, 2020 at 6:57 am #

REPLY ↩

Fixed, thanks!



LANET March 23, 2020 at 4:39 am #

REPLY ↩

Start Machine Learning

Hi Dr.Jason,

I have a question about time-series forecasting.I have to predict the value of Time-series A in the next few hours.And at the same time,the Time-series B have an influence on A.I have two ideas :

1.X_train is time T and Y_train is the value of A_T and B_T

2 X_train is the value of (A_n, A_n-1, A_n-2,...A_n-k, B_n, B_n-1, B_n-2,...,B_n-k) ,Y_train is (A_n+1, A_n+2,...,A_n+m)

Which is better?



Jason Brownlee March 23, 2020 at 6:15 am #

REPLY ↩

Test and compare results.

It might be easier to model it as a multivariate input

The tutorials here will help:

<https://machinelearningmastery.com/start-here/#de>

Start Machine Learning



You can master applied Machine Learning

without math or fancy degrees.

Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



LANET March 23, 2020 at 8:08 pm #

Thanks! It definitely helps me a lot !



Jason Brownlee March 24, 2020 at 6:00 am #

REPLY ↩

I'm happy to hear that.



LANET March 23, 2020 at 4:44 am #

REPLY ↩

Hope for your suggestions.

Thanks and best regards.

Lanet



Jason Brownlee March 23, 2020 at 6:15 am #

REPLY ↩

You're welcome.



DEAN MCBRIDE April 7, 2020 at 12:54 am #

REPLY ↩

Start Machine Learning

Hi Jason

I get numerous warnings for some of the models (e.g. robustness warnings, and model convergence warnings, etc.) Do you get the same?

Thanks,
Dean



Jason Brownlee April 7, 2020 at 5:52 am #

REPLY ↩

Sometimes. You can ignore them for now, or explore model configs/data preps that are more kind to the underlying solver.



DEAN MCBRIDE April 7, 2020 at 4:24 pm #

Thanks Jason.

One other thing – do you know where I could find more information (e.g. links to the theory) ? Since I'll need to know what code to use.

I did access the links you posted (e.g. statsmodels, sklearn, etc.) and they are without code examples.

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**. Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Jason Brownlee April 8, 2020 at 7:45 am #

REPLY ↩

Yes, a textbook on convex optimization, wikipedia, the original papers, and maybe the scipy API.



Stéfano April 7, 2020 at 1:00 pm #

REPLY ↩

Hi Jason Brownlee,

I appreciate that you posted this explanation about the models.

I would like to apply the algorithms to my problem.

I was in doubt as to how to extract the predicted value and the current value of each prediction. I would like to calculate the RMSE, MAPE, among others.



Jason Brownlee April 7, 2020 at 1:33 pm #

REPLY ↩

Start Machine Learning

You're welcome.

You can make a prediction by fitting the model on all available data and then calling `model.predict()`



rina April 9, 2020 at 8:09 pm #

REPLY ↩

hello Jason, thank you for your post. it is so interesting.

In fact i have a question. I have many time series Traffic per region. I don't want ot have 40 models to forecast trafic for each region.

Do you have an idea how can i use one model to predict trafic for all regions so one model to a multiple time series?

Thank you in advance



Jason Brownlee April 10, 2020 at 8:27 am #

Yes, I list some ideas here:

<https://machinelearningmastery.com/faq/single-faq>

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees.**

Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



rina April 10, 2020 at 7:38 pm #

REPLY ↩

thank you for your answer. for my project i want to have one model to predict all the values for all cities.

I don't know wich types of algorithms can i use that accept multiserries can you help me with this thank you



Jason Brownlee April 11, 2020 at 6:16 am #

REPLY ↩

Follow this framework to discover the algorithm that works best for your specific data:

<https://machinelearningmastery.com/how-to-develop-a-skilful-time-series-forecasting-model/>



rina April 12, 2020 at 9:04 pm #

thank you for your response. In fact do you have an examples of link or article with python that forecast with multiple independant time series

my data is in this format:

Start Machine Learning

date ville X(predicted value)

01/01/2016 A 2

01/02/2016 A 4

01/02/2016 A 5

01/01/2016 B 10

01/02/2016 B 11

01/02/2016 B 13



Jason Brownlee April 13, 2020 at 6:14 am #

Yes many – search the blog,

<https://machinelearningmastery.com/h/forecasting/>

Start Machine Learning

You can master applied Machine Learning **without math or fancy degrees.**

Find out how in this *free* and *practical* course.

START MY EMAIL COURSE



Nirav April 9, 2020 at 10:33 pm #

I want to fit a curve on time series data. Will the prediction only?



Jason Brownlee April 10, 2020 at 8:30 am #

REPLY ↩

Perhaps use the methods here:

https://docs.scipy.org/doc/scipy/reference/generated/scipy.optimize.curve_fit.html



Alaa May 9, 2020 at 11:01 am #

REPLY ↩

Dear Jason,

Do you have a blog where you forecast univariate time series using a combination of exponential smoothing and neural network?

I mean where we give lags of time series to exponential smoothing model and the output of exponential smoothing will be the input of a neural network?

Thank you



Jason Brownlee May 9, 2020 at 1:51 pm #

REPLY ↩

I don not, sorry.

Start Machine Learning



QuangAnh May 28, 2020 at 8:21 am #

REPLY ↩

Hi Jason,

Could you also please review the BATS and TBATS models? (De Livera, A.M., Hyndman, R.J., & Snyder, R. D. (2011), Forecasting time series with complex seasonal patterns using exponential smoothing, Journal of the American Statistical Association, 106(496), 1513-1527.) Like SARIMA, they are quite good to deal with seasonal time series. And I am wondering if you have any plan to review Granger causality which is often used to find time series dependencies from multivariate time series? Thank you.



Jason Brownlee May 28, 2020 at 1:23 pm #

Thanks for the suggestion!

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**.
Find out how in this *free* and *practical* course.

START MY EMAIL COURSE

Leave a Reply

Name (required)

Email (will not be published) (required)

Website

SUBMIT COMMENT



Welcome!


My name is *Jason Brownlee* PhD, and I **help developers** get results with **machine learning**.
[Read more](#)

Start Machine Learning

Never miss a tutorial:



Picked for you:



[How to Create an ARIMA Model for Time Series Forecasting in Python](#)



[How to Convert a Time Series to a Supervised Learning Problem in Python](#)



[Time Series Forecasting as Supervised Learning](#)



[11 Classical Time Series Forecasting Methods in Python](#)



[How To Backtest Machine Learning Models for Time Series](#)

Start Machine Learning



You can master applied Machine Learning **without math or fancy degrees**.
Find out how in this *free* and *practical* course.

[START MY EMAIL COURSE](#)

Loving the Tutorials?

The [Time Series with Python](#) EBook
is where I keep the **Really Good** stuff.

[SEE WHAT'S INSIDE](#)

© 2020 Machine Learning Mastery Pty. Ltd. All Rights Reserved.
Address: PO Box 206, Vermont Victoria 3133, Australia. | ACN: 626 223 336.
[LinkedIn](#) | [Twitter](#) | [Facebook](#) | [Newsletter](#) | [RSS](#)

[Privacy](#) | [Disclaimer](#) | [Terms](#) | [Contact](#) | [Sitemap](#) | [Search](#)

[Start Machine Learning](#)