Express - Routing

Path param : http://monapp.fr/567940345

```
prouter.delete( path: "/:id", handlers: (reg : Request<P, ResBody, ReqBody, ReqQuery, Locals> , res : Response<ResBody, Locals> )=>{
persons = persons.filter(p=>p.id !== Number(reg.params.id))
res.send(persons);
```


Query param: http://monapp.fr/?firstName=Peter&lastName=McAlloway

```
router.get( path: "/", handlers: (req : Request<P, ResBody, ReqBody, ReqQuery, Locals> , res : Response<ResBody, Locals> )=>{
const {firstName, lastName} = req.query;
res.send(persons.filter(p=>p.firstName.contains(firstName) || p.lastName.contains(lastName)));
})
```

Express - Routing

- Body
 - Interpréter du json

```
app.use(express.json());
```

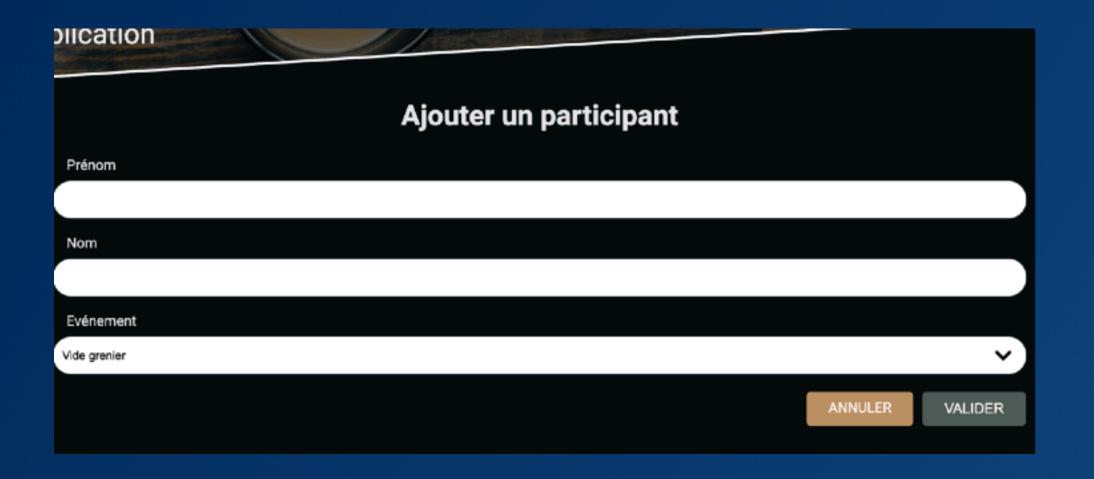

```
router.post( path: "/", handlers: (reg : Request<P, ResBody, ReqBody, ReqQuery, Locals> , res : Response<ResBody, Locals> )=>{
const person = reg.body;
person.id = getNex|tId();
persons.push(person);
res.send(persons);
```