

Client Script -onChange


10) Calculate incident priority from impact and urgency:

The screenshot shows the ServiceNow Client Script editor interface. The browser address bar displays 'dev364702.service-n...'. The ServiceNow header includes the logo, 'All' filter, and a search bar with 'Client Script - calcul...'. The application scope is set to 'Global' and the update set is 'Default [Global]'. The script title is 'Client Script calculate priority'. The script content is as follows:

```
1 function onChange(control, oldValue, newValue, isLoading,
2   var urgency = g_form.getValue('urgency');
3
4
5
6
7
8   if (!impact || !urgency) {
9     return; }
10  var priorityMap = {
11    '1-1': '1',
12    '1-2': '2',
13    '1-3': '3',
14
15    '2-1': '2',
16    '2-2': '3',
17    '2-3': '4',
18
19    '3-1': '3',
20    '3-2': '4',
21    '3-3': '5'
22  };
23  var key = impact + '-' + urgency;
24  var priority = priorityMap[key];
25
26  if (priority) {
27    g_form.setValue('priority', priority);
```

The 'Isolate script' checkbox is checked.

20) Display support group recommendation for selected CI:

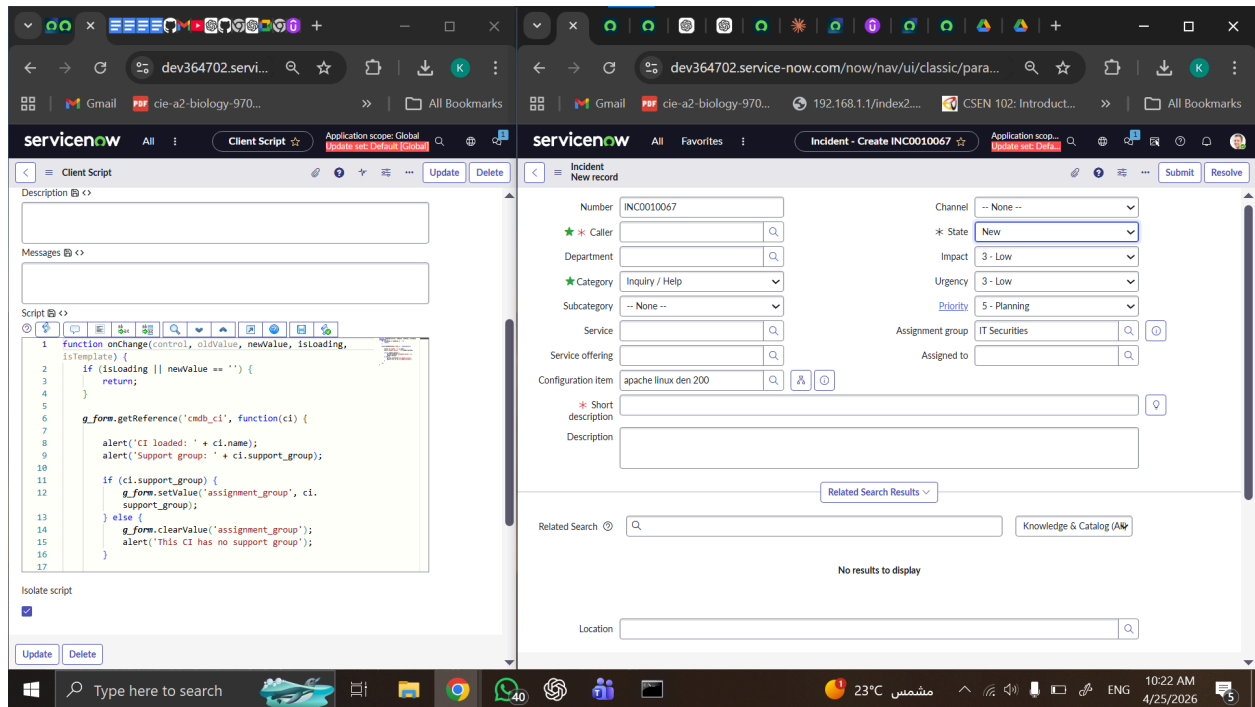

The screenshot displays two side-by-side browser windows from the ServiceNow platform. The left window shows the 'Client Script' editor for the 'Incident' table. The script is designed to trigger an alert when a Configuration Item (CI) is loaded, displaying its name and support group. The right window shows the 'Incident - Create' form for incident INCD0010067. The form includes fields for Caller, State (set to 'New'), Department, Category (set to 'Inquiry / Help'), Subcategory, Service, Service offering, Configuration Item (set to 'apache linux den 200'), and Priority (set to '5 - Planning'). The 'Assignment group' is set to 'IT Securties'. Below the form, a 'Related Search' section shows 'No results to display'.

Client Script Code:

```
1 function onChange(control, oldValue, newValue, isLoading,
2 isTemplate) {
3     if (isLoading || newValue == '') {
4         return;
5     }
6     g_form.getReference('cnadb_ci', function(ci) {
7         alert('CI loaded: ' + ci.name);
8         alert('Support group: ' + ci.support_group);
9     });
10    if (ci.support_group) {
11        g_form.setValue('assignment_group', ci.support_group);
12    } else {
13        g_form.clearValue('assignment_group');
14        alert('This CI has no support group');
15    }
16 }
17
```

Incident Form Fields:

- Number: INCD0010067
- Channel: -- None --
- * State: New
- Department:
- * Impact: 3 - Low
- Category: Inquiry / Help
- Subcategory: -- None --
- Service:
- Service offering:
- Configuration Item: apache linux den 200
- * Short description:
- Description:
- Priority: 5 - Planning
- Assignment group: IT Securties
- Assigned to:

Related Search Results:

No results to display

22) Make incident work notes read-only in resolved state:

The screenshot shows the ServiceNow interface for configuring a Client Script. The browser address bar shows the URL `dev364702.service-n...`. The ServiceNow header includes the logo, navigation tabs, and the title 'Client Script - make...'. A notification banner at the top states: 'New client-scripts are run in strict mode, with direct DOM access disabled. Access to jQuery, prototype and the window object are likewise disabled. To disable this on a per-script basis, configure this form and add the "Isolate script" field. To disable this feature for all new globally-scoped client-side scripts set the system property "glide.script.block.client.globals" to false.'

The configuration form includes the following fields:

- Name:** make incident work notes only
- Table:** Incident [incident]
- UI Type:** All
- Type:** onLoad
- Application:** Global
- Active:** ☒
- Inherited:** ☐
- Global:** ☒

The Description, Messages, and Script sections are visible. The Script section contains the following JavaScript code:

```
1 function onLoad() {  
2   var state = g_form.getValue('state');  
3  
4   if(state == '6'){  
5     g_form.setReadOnly('work_notes',true);  
6   }  
}
```

24) Show problem workaround field only in assess state

The screenshot shows a web browser window with the ServiceNow interface. The browser's address bar displays `dev364702.service-n...`. The ServiceNow header includes the logo, navigation tabs, and a "Client Script - show..." title. The main content area is titled "Client Script" and "show prolem workaround". It contains three input fields: "Description", "Messages", and "Script". The "Script" field is active, showing a JavaScript function `onLoad()` that checks the value of the `state` field. If `state` is `'2'`, it sets the `workaround` field to `true`; otherwise, it sets it to `false`. Below the script editor, there is an "Isolate script" checkbox which is checked. At the bottom, there are "Update" and "Delete" buttons, a "Related Links" section with a link to "Run Point Scan", and a footer with a "Versions" table and a "New" button.

ServiceNow Client Script editor interface showing a script to toggle the 'workaround' field based on the 'state' field value.

Script content:

```
1 function onLoad() {
2   var state = g_form.getValue('state');
3
4   if(state == '2'){
5     g_form.setDisplay('workaround', true);
6   } else{
7     g_form.setDisplay('workaround', false);
8   }
9 }
```

Isolate script ☒

Update Delete

Related Links

[Run Point Scan](#)

Versions Recorded at Search Actions on selected rows... New

3) Prevent incident submit if short description is blank:

The screenshot shows the ServiceNow interface for configuring a Client Script. The browser tabs include 'Service', 'dish', 'p x', 'Service', and 'Goog'. The address bar shows 'dev364702.service-n...'. The ServiceNow header includes the logo, 'All', and a search bar with 'Client Script - prev...'. The application scope is 'Global' and the update set is 'Default [Global]'. The Client Script configuration is for the 'Incident [incident]' table, 'All' UI Type, and 'onSubmit' Type. It is set to 'Active', 'Inherited' is unchecked, and 'Global' is checked. The 'Description' and 'Messages' fields are empty. The 'Script' field contains the following JavaScript code:

```
1 function onSubmit() {  
2     //type appropriate comment here, and begin script below  
3     var shortDescription = g_form.getValue  
4     ('short_description');  
5     if(!shortDescription || shortDescription.trim() ===  
6     ''){  
7         g_form.addErrorMessage('short description is  
8         required submitting the incident');  
9         return false;  
10    }  
11 }
```

The 'Isolate script' checkbox is checked.

11. Require close notes before resolving incident:

The screenshot shows a web browser window with the ServiceNow interface. The browser's address bar shows the URL `dev364702.service-now.com...`. The ServiceNow header includes the logo, a navigation menu, and a search bar. The main content area is titled "Client Script - Require Close Notes" and contains a "Messages" section and a "Script" editor. The script editor shows the following code:

```
1 function onSubmit() {  
2     //Type appropriate comment here, and begin script below  
3     var state = g_form.getValue('state');  
4     var closeNotes = g_form.getValue('close_notes');  
5  
6     if(state == '6'){  
7         if(!closeNotes || closeNotes.trim()=== ''){  
8             g_form.addErrorMessage('Close notes are required before  
9                 resolving the incident');  
10            return false;  
11        }  
12    }  
13    return true;  
14 }
```

Below the script editor, there is an "Isolate script" checkbox which is checked. At the bottom of the page, there is a "Related Links" section with a link to "Run Point Scan". A table at the bottom shows the "Versions" of the script, with columns for "Name", "Recorded at", "State", "Source", and "Reverted from".

Name	Recorded at	State	Source	Reverted from

27)

The screenshot shows a web browser window with the ServiceNow interface. The address bar shows the URL `dev364702.service-now.com...`. The ServiceNow header is visible with the logo and navigation tabs. The main content area displays a Business Rule configuration for "Calculate incident priority". The script editor is open, showing the following JavaScript code:

```
1 (function executeRule(current, previous /*null when async*/) {
2
3     var impact = current.impact.toString();
4     var urgency = current.urgency.toString();
5
6     var priorityMap = {
7         '1-1': '1',
8         '1-2': '2',
9         '1-3': '3',
10        '2-1': '2',
11        '2-2': '3',
12        '2-3': '4',
13        '3-1': '3',
14        '3-2': '4',
15        '3-3': '5'
16    };
17
18    var key = impact + '-' + urgency;
19
20    if (priorityMap[key]) {
21        current.priority = priorityMap[key];
22    }
23 }
```

Below the script editor, there are "Update" and "Delete" buttons. At the bottom, there is a "Related Links" section with a link to "Run Point Scan".

50)

dev364702.service-now.com...

New Chrome available

service-now

All

Business Rule - Set ...

Ap... Up...

1

1

Business Rule

Set Opened to current user

Update

Delete

Name

Set Opened to current user

Application

Global

Table

Incident [Incident]

Active

Advanced

When to run

Actions

Advanced

Condition

Script

Turn on ECMAScript 2021 (ES12) mode

1

2

3

4

5

6

7

(function executeRule(current, previous /*null when async*/) {

if (!current.opened_by) {

current.opened_by = gs.getUserID();

}

})(current, previous);

Update

Delete

Related Links

44)

The screenshot shows a web browser window with the ServiceNow interface. The browser's address bar shows the URL `dev364702.service-now.com...`. The ServiceNow header includes the logo, navigation tabs, and a search bar. The main content area is titled "Business Rule - Force knowledge article to draft on insert". Below the title, there is a description: "A business rule is a server-side script that runs when a record is displayed, inserted, deleted, or when a table is queried. Use business rules to automatically change values in form fields when the specified conditions are met. [More Info](#)".

The configuration form includes the following fields:

- Name:** Force knowledge article to draft
- Table:** Knowledge [kb_knowledg...]
- Application:** Global
- Active:** ☒
- Advanced:** ☒

Below the form, there are tabs for "When to run", "Actions", and "Advanced". The "Advanced" tab is selected, showing a "Condition" field and a "Script" field. The "Script" field has a toggle for "Turn on ECMAScript 2021 (ES12) mode" which is currently off. The script content is as follows:

```
1 (function executeRule(current, previous /*null when async*/) {
2
3     current.workflow_state = 'draft';
4
5 })(current, previous);
```

At the bottom of the page, there are "Update" and "Delete" buttons.