Assessing Translation capabilities of Large Language Models involving English and Indian Languages

Vandan Mujadia, Ashok Urlana, Yash Bhaskar, Penumalla Aditya Pavani, Kukkapalli Shravya, Parameswari Krishnamurthy and Dipti Misra Sharma

LTRC, IIIT Hyderabad, India

{vandan.mu,ashok.urlana,yash.bhaskar}@research.iiit.ac.in, {aditya.pavani,kukkapalli.shravya}@students.iiit.ac.in, {param.krishna,dipti}@iiit.ac.in

Abstract

Generative Large Language Models (LLMs) have achieved remarkable advancements in various NLP tasks. In this work, our aim is to explore the multilingual capabilities of large language models by using machine translation as a task involving English and 22 Indian languages. We first investigate the translation capabilities of raw large language models, followed by exploring the in-context learning capabilities of the same raw models. We fine-tune these large language models using parameter efficient finetuning methods such as LoRA and additionally with full fine-tuning. Through our study, we have identified the best performing large language model for the translation task involving LLMs, which is based on LLaMA.

Our results demonstrate significant progress, with average BLEU scores of 13.42, 15.93, 12.13, 12.30, and 12.07, as well as CHRF scores of 43.98, 46.99, 42.55, 42.42, and 45.39, respectively, using 2-stage fine-tuned LLaMA-13b for English to Indian languages on IN22 (conversational), IN22 (general), flores200dev, flores200-devtest, and newstest2019 testsets. Similarly, for Indian languages to English, we achieved average BLEU scores of 14.03, 16.65, 16.17, 15.35 and 12.55 along with chrF scores of 36.71, 40.44, 40.26, 39.51, and 36.20, respectively, using fine-tuned LLaMA-13b on IN22 (conversational), IN22 (general), flores200-dev, flores200-devtest, and newstest2019 testsets. Overall, our findings highlight the potential and strength of large language models for machine translation capabilities, including for languages that are currently underrepresented in LLMs.

1 Introduction

Generative Large Language Models (LLMs) have made significant performance improvements in various natural language processing (NLP) tasks, showcasing exceptional progress in a wide range of applications (Xuanfan and Piji, 2023;




Figure 1: LLMs based Machine Translation performance comparison with public systems for **English to Indian Languages**. BLEU and chrF scores are averaged over 22 Indian Languages and 5 different benchmark data-sets. The available MT systems are GPT-3.5 (GPT-3.5 Davinci, by OpenAI), IndicTrans-2, Google Translation, LTRC-IIIT-H, SeamlessM4T. LLaMA-2-7b and LLaMA-2-13b are evaluated as LLM based fine-tuned MT systems are namely LLaMA-2-7b+lora (Multi), LLaMA-2-13b+lora (Multi), and LLaMA-2-13b+FF+lora (Multi).

Xi et al., 2023). These tasks span from open domain question answering, where LLMs excel at providing accurate and coherent responses, to instruction-based tasks such as code completion, where LLMs can generate code snippets based on given prompts (Vaithilingam et al., 2022). LLMs have also demonstrated proficiency in tasks like essay writing, grammar checking (Wu et al., 2023a), and text summarization, where they can produce high-quality outputs (Chang et al., 2023). These advancements have primarily been observed in English-centric tasks. popular LLMs support several of natural languages. The performance for some languages other than English is not yet on par or yet to be evaluated (Lai et al., 2023; Zhu et al., 2023).

A multilingual country like India, where

over 364+ languages and dialects ¹ are spoken across its vast territory, presents a multitude of challenges across various domains due to language barriers (Zieliński et al., 2021), such as day-to-day communication, education (Steigerwald et al., 2022), business, healthcare (Mehandru et al., 2022), tourism, governance, and more. Recent advancements in the field of Large Language Models may offer solutions to these challenges tailored to Indian languages.

To test whether LLM can effectively overcome language barriers, it is crucial to evaluate the proficiency of large language models in handling Indian languages. Machine Translation, as a critical multilingual task, could be an ideal option to explore the multilingual capabilities of existing models. Hence, we can formulate the question to assess the proficiency of large language models in handling Indian languages as follows: How effectively do large language models perform in multilingual tasks like Machine Translation, particularly when dealing with Indian languages?

In this work, our major contribution is to address the following points in response to the above question.

- What are the directions for utilizing or adapting Large Language Models for Indian Languages?
 - How do LLMs perform in translating a wide range of Indian languages under zero-shot and in-context learning settings?
 - Does LLM fine-tuning improve the translation capabilities of Large Language Models? How do they perform on lowresourced MT languages?
 - The impact of LLM Vocabulary on the Performance of Large Language Models in Translation Tasks.

To address the above questions, we assess the translation capabilities of popular large language models (opt, bloom, LLaMA-1, MPT, Falcon, LLaMA-2, and Mistral [Section 3]) involving English and 22 scheduled Indian languages (Assamese, Bangla, Bodo, Dogri, Konkani, Gujarati,

Hindi, Kannada, Kashmiri, Maithili, Malayalam, Marathi, Meitei, Nepali, Odia, Punjabi, Sanskrit, Santali, Sindhi, Tamil, Telugu, and Urdu). We initially examine the translation capabilities of above mentioned raw large language models [Section 5.1]. Subsequently, we explore their in-context learning abilities [Section 5.1]. Additionally, we fine-tune the base models using parameter-efficient fine-tuning methods specifically LoRa [Section-6]. Furthermore, we investigate the potential of 2-stage fine-tuning for large language models, which involves full parameter fine-tuning in the first stage, followed by LoRa-based adaptor fine-tuning [Section 6].

The key findings of our work, as summarized in Figure 1, highlight the performance of our LLM-based machine translation fine-tuned models compared to various known translation engines. These engines range from commercial (Google², GPT-3.5³) to open source (IndicTrans-2⁴, LTRC-IIIT-H⁵, seamlessm4t⁶), traditional supervised encoder-decoder translation models (Google, IndicTrans-2, LTRC-IIIT-H) and decoder-driven causal large language model-based translation systems (GPT-3.5).

Our findings underscore the significant potential of large language models for translation tasks involving English and Indian Languages. While raw LLMs (LLaMA-2-7b and LLaMA-2-13b) not perform well on translation tasks, our two-stage MT fine-tuned models (LLaMA-2-13b+FF+lora(Multi)) yields comparative results even with minimal parallel corpora. This suggests that LLMs have the potential to possess multilingual capabilities for translating into underrepresented languages, which can be further enhanced through fine-tuning. This work will be a crucial and pioneering milestone in evaluating LLMs for language representation and assessing their translation capabilities for a diverse range of Indian languages, especially those with limited available resources.

¹https://en.wikipedia.org/wiki/Linguistic_ Survey_of_India

²https://translate.google.co.in/

³https://chat.openai.com/

⁴https://github.com/AI4Bharat/IndicTrans2

⁵https://ssmt.iiit.ac.in/translate

⁶https://github.com/facebookresearch/seamless_ communication

2 Related Work

Recent advancements in machine translation have shown that neural machine translation (NMT) has made significant strides in terms of output fluency and translation quality, especially when ample parallel data is available (Barrault et al., 2020). However, the scarcity or absence of parallel data poses a challenge for most language pairs. In the case of Indian languages, recent developments have tried to addressed this issue by introducing a new state-of-the-art approach: multilingual machine translation involving Indian languages and English (Wang et al., 2021; Dabre et al., 2020). This approach leverages a single script for machine translation, capitalizing on the lexical and syntactic similarities that arise from the genetic and contactrelatedness among Indian languages (Gala et al., 2023; Eriguchi et al., 2022; Bapna and Firat, 2019).

In the field of LLM driven machine translation, in-context learning has gained significant attention (Wu et al., 2023b). The use of large language models (LLMs) for multilingual machine translation has been a subject of interest (Zhang et al., 2023). Recent studies have evaluated the translation capabilities of LLMs for different language directions, with a focus on models like ChatGPT (Bang et al., 2023). Notably, Xu et al. proposed a two-stage fine-tuning approach for machine translation using LLMs, involving fine-tuning on monolingual data followed by fine-tuning on a small set of highquality parallel data. Our work represents the first study that specifically explores machine translation involving Indian languages using large language models.

3 Large Language Models

Language modeling, a well-established task in the field of natural language processing, has garnered significant attention over the years (Bellegarda, 2004; Bengio et al., 2000). This task involves predicting the probability of the next token in a sequence of words. Transformers have emerged as the fundamental architecture underlying many existing Large Language Models (Vaswani et al., 2017).

Transformers based autoregressive models like GPT (Brown et al., 2020; Radford et al., 2019) have played a crucial role in advancing Natural Language Processing (NLP). GPT-3, with 175

billion parameters, is a standout in this category. It is similar in structure to GPT-2 and GPT-1 but benefits from a more extensive and varied dataset, making it exceptionally powerful in NLP. Further, prompt-based ChatGPT (GPT-3.5 text-davinci-003 and GPT-3.5 turbo) has been performing exceptionally by utilizing the reinforcement-based human feedback strategy. Although these models exhibit impressive performance on several NLP tasks, privacy and bias of the models have been a bottleneck. To mitigate such issues, LLaMA (Touvron et al., 2023a) is an open-sourced foundation model trained on publicly available datasets. Similarly, Falcon-40B (Almazrouei et al., 2023) is another open-source LLM trained on a RefinedWeb corpus of 1500 billion tokens. Falcon even comes with 7 and 40 billion instruction versions trained on conversation data.

The recent adaptation of Large Language Models (LLMs) for instruction tuning has proven to be a promising approach in improving the performance of various natural language processing tasks. Specifically, in languages like Chinese and Swedish demonstrates the impressive zero-shot and generation abilities of the low-rank adaptation of LLaMA for non-English languages (Cui et al., 2023; Holmström and Doostmohammadi, 2023). However, it is worth noting that the current focus of these instruction models is primarily on English. Therefore, there is an immediate need to explore ways to adapt these models to low-resource Indian languages.

3.1 Base models

In this work, we used the following base LLM models to test the levels of language coverage and explore their potential for machine translation tasks involving English and Indian languages.

- opt-6.7b⁷: The OPT-6.7b (Zhang et al., 2022) model has been extensively trained on the objective of causal language modeling (CLM) using English text. Although the majority of the training data is in English, a small portion of non-English data from CommonCrawl has also been included. This model utilizes 6.7 billion parameters, consisting of 32 layers and 32 attention heads, and employs an embedding size of 4096.
- Bloom-7B⁸: BLOOM (Scao et al., 2022) was

⁷https://huggingface.co/facebook/opt-6.7b

⁸https://huggingface.co/bigscience/bloom-7b1

the first largest multilingual large language model with causal language modeling objective and supports 46 languages and 13 programming languages. Its overall training data contains 1.1% of Indian languages. We opted for Bloom model with 7,069,016,064 parameters with 30 layers, 32 attention heads, 4096 embedding dimensional where maximum token length is 2048.

- LLaMA-7B⁹: LLaMA is a collection of foundation language models ranging from 7B to 65B parameters. These models are multilingual models and trained on trillions of tokens. The data includes CCNet, C4, GitHub, Wikipedia, Books, ArXiv, Stack Exchange. In our experiments we evaluated LLaMA model with 7B parameters where 4096 is embedding dimensions and 32 layers and 32 attention head.
- MPT-7B¹⁰: Similar to above models MPT-7B model is trained on a large amount of data 1T tokens on causal language modeling objective.
- Falcon¹¹: Falcon (Penedo et al., 2023a) is another large language model trained on causal language modeling (CLM) objective. Here, we utilised Falcon-7B model which is a 7B parameters and trained on 1.5 trillion tokens of RefinedWeb (a novel massive web data-set based on CommonCrawl) enhanced with curated corpora. The model has multilingual capabilities but no Indian languages are explicitly present. We have used Falcon-7B for our experiments.
- LLaMA-2-7B¹² and LLaMA-2-13B¹³: LLaMA 2 based models (Touvron et al., 2023b) are also trained on causal language modeling (CLM) objective and pretrained on 2 trillion tokens of data from publicly available sources of till September 2022. These models are available in different range parameters from 7 billion to 70 billion. These models have 4k sub-words as context length. In

our experiments we have experimented with 7B and 13B LLaMA-2 models. LLaMA-2-7B network has 32 layers and 32 attention heads while LLaMA-2-13B has 40 layers and 40 attention heads.

• Mistral-7B¹⁴: Mistral-7B Large Language Model (LLM) (Jiang et al., 2023) is a pretrained on causal language modeling (CLM) objective with 7 billion parameters. It uses Sliding Window Attention (SWA) to handle longer sequences at smaller cost and Grouped-query attention (GQA) for faster inference which reduces the memory requirement during decoding. It has 4096 embedding dimension, 32 layers and 32 attention heads with context length of 8192 context length.

4 Indian Languages representation in LLMs

Pre-trained (or Raw) large language models are trained on a huge amount of language data, and some of the these models are trained on multiple languages (Naveed et al., 2023). However, their training primarily focuses on English text (Penedo et al., 2023b). Emphasis on English is due to its substantial presence on the internet and its widespread usage in business contexts. For the purpose of this work, our objective is to assess the effectiveness of these models in Machine Translation tasks that involve both English and Indian Languages. Consequently, it becomes crucial to investigate the representation of Indian languages within these large language models.

An approach to investigating the representation of Indian languages within a large language model can involve analyzing the frequency of language-specific words and sentences used during the training of these models. Unfortunately, it is not possible to perform this analysis as the training data used for these models are not publicly accessible. LLaMA-2, in particular, has mentioned that its pretraining corpus primarily consists of English and may not be optimal for other languages (Touvron et al., 2023b). However, it is worth mentioning that approximately 8.38% of the data does include languages other than English and codes in LLaMA-2.

On the other hand, studying the vocabulary (or letters/characters) of a corpus can provide valuable

⁹https://huggingface.co/decapoda-research/llama-7b-hf

¹⁰https://huggingface.co/mosaicml/mpt-7b

¹¹https://huggingface.co/tiiuae/falcon-7b

¹²https://huggingface.co/meta-llama/

Llama-2-7b-hf

¹³https://huggingface.co/meta-llama/ Llama-2-13b-hf

¹⁴https://huggingface.co/mistralai/ Mistral-7B-v0.1

| Language Family Language | asm ban | kas snd urd | Indo-Aryan doi hin gom mai mar nep sa | n guj | odi | pan | kan | Dravidi mal | an tam | Sino | -Tibetan brx | Austroasiatic sat | |
|-----------------------------|---------|--------------|--|----------|---------|----------|---------|----------------|-----------|---------|-----------------|----------------------|---------|
| Language Script | Bangla | Perso-Arabic | Devanagari | Guiarati | Odia | Gurmukhi | Kannada | Malavalam | Tamil | Telugu | Meitei | Devanagari | Ol Chik |
| No of Letters in Unicode | 96 | 256 | 128 | 91 | 91 | 80 | 91 | 118 | 72 | 100 | 56 | 96 | 48 |
| Models (Vocab) | | | | | | | | | | | | | |
| BLOOM (250680) | (48,48) | (49,207) | (67,61) | (57,34) | (56,35) | (55,25) | (62,29) | (66,52) | (46,26) | (61,39) | (00,56) | (67,29) | (00,48) |
| FALCON (65024) | (00,96) | (12,244) | (2,126) | (00,91) | (00,91) | (00,72) | (0,100) | (00,56) | (02,70) | (04,96) | (00,56) | (02,94) | (00,48) |
| LLAMA-1,2 (32024) | (24,72) | (45,211) | (38,90) | (01,90) | (00,91) | (04,76) | (02,89) | (33,155) | (19,53) | (01,99) | (00,56) | (38,90) | (00,48) |
| MISTRAL (32052) | (34,62) | (47,209) | (43,85) | (05,86) | (00,91) | (02,78) | (18,73) | (04,116) | (22,50) | (11,89) | (00,56) | (43,53) | (00,48) |
| MPT (50277) | (05,91) | (35,221) | (22,106) | (02,89) | (00,91) | (00,80) | (00,91) | (01,117) | (05,67) | (03,97) | (00,56) | (22,106) | (00,48) |
| OPT (50265) | (00,96) | (13,243) | (1,127) | (00,91) | (00,91) | (00,80) | (00,91) | (0,118) | (00,72) | (0,100) | (00,56) | (01,95) | (00,48) |

Table 1: The language support of various LLMs for 22 Indian languages, along with the corresponding families, scripts, and letters representing each language. In each tuple (xx, yy), the first value represents the number of language-specific characters, while the second value indicates the count of byte-supported characters in respective LLM and for respective language.

insights into the representation and coverage of language within that corpus. The writing system or script used plays a crucial role in representing a language. Therefore, analyzing the vocabulary can be considered a proximal task. Fortunately, we have access to the sub-word vocabulary for the considered large language models. By comparing the characters present in the sub-word vocabulary with those in the corresponding language script, we can approximate the language representation within the respective LLM.

For this work, we included a total of 22 scheduled Indian languages for translation, which can be categorized into four main language families: Indo-Aryan, Dravidian, Sino-Tibetan, and Austroasiatic. These 22 Indian languages are written using 13 major scripts. It is interesting to note that most of these scripts can be traced back to the Brahmi script ¹⁵, which served as the foundation for the development of several Indian scripts (Salomon, 1995). Each of these 13 writing systems has its own unique set of letters and characters ¹⁶, reflecting the phonetic and linguistic characteristics of the respective languages they represent.

Table 1 presents an overview of the scripts, the languages utilizing these scripts, and the corresponding sub-word vocabulary sizes for LLMs. The numbers indicated in '(X,Y)' represent the counts of native script letters (characters in unicode ¹⁷) present and not present in the respective LLM. Specifically, X denotes the number of native language characters present in the vocabulary, while Y denotes the number of characters represented as

pre-defined (multiple) hexadecimal values. Upon analysis, we observe that, in general, the 22 Indian languages have a limited presence in most of the LLMs. However, the Devanagari, Perso-Arabic, and Bangla scripts demonstrate the most extensive sub-word vocabularies, while other scripts have minimal or near-zero representation within the vocabulary.

5 Experiment setup: Machine Translation using LLMs

To evaluate the performance of the large language models (LLMs) in machine translation tasks involving English and 22 Indian languages, we conducted two experiments. The first experiment focused on assessing the performance of the pre-trained (raw) LLM. In the second experiment, we utilized example-based in-context learning for the same machine translation task. Both translation directions were explored, including English to 22 Indian languages and 22 Indian languages to English. All experiments were conducted using translation benchmark data, as discussed in Section 6.

As part of our experimental setup, we used the prompting pipeline depicted in Figure 2. This pipeline involved using a Prompt Generator to generate specific prompts for the source and target language along with source text. Subsequently, an LLM call is triggered to generate a response, which was then processed by a translation parser to obtain the actual translation. To ensure high-throughput and memory-efficient inference and serving for LLMs, we utilized the vLLM library¹⁸ (Kwon et al., 2023). We conducted all experiments using a temperature parameter of 0, which ensures that the model behaves deterministically. By setting the temperature to 0, the model is constrained to se-

¹⁵https://www.education.gov.in/sites/upload_ files/mhrd/files/upload_document/languagebr.pdf 16https://en.wikipedia.org/wiki/Official_

scripts_of_the_Republic_of_India

¹⁷https://unicode.org/

¹⁸https://github.com/vllm-project/vllm

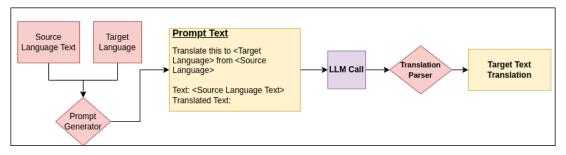


Figure 2: Prompting Mechanism for Translation

lect the word with the highest probability, effectively limiting its choice to the most likely option (Aksitov et al., 2023). All of our experiments are conducted using vLLM library on A100, 40GB GPUs.

5.1 Machine Translation on Raw LLM

To optimize the machine translation task on our selected LLMs, we conducted manual trials with various prompts. Through these trials, we discovered that directly asking for the translation and presenting the text in JSON format yielded better results, as the models seemed to comprehend the JSON structure more effectively (Reinauer et al., 2023). After multiple iterations, we finalized two prompts for translating sentences using raw (pretrained) LLMs, as illustrated in below examples. These prompts were used to evaluate the efficiency of the models.

Example: Translation Prompt-1

Translate this to <Target Language> from <Source Language>

Text: <Source Language Text> Translated Text:

Example: Translation Prompt-2

Translate this from <Source Language> to <Target Language>

<Source Language>: <Source Language Text>

<Target Language>:

Example: ICL Translation Prompt

If the <Source Language> to <Target Language> translation for "<Source Example>" is "<Target Example>" from <Source Language>, following that, translate this to <Target Language> from <Source Language>

Text: <Source Language Text> Translated Text:

Similarly, we identified and modified the prompt for example-based in-context learning with LLM. This prompt is specified in Example above (ICL Translation Prompt). In the case of in-context learning, all of our experiments involved providing a single translation sample as a contextual learning example prior to the actual translation command. We ensured that this example remained consistent for the same language pair across the sentences. The sample itself was randomly selected from the Human-BPCC translation training corpus (AI4Bharat et al., 2023). We present the outcomes of both of these experiments in the Performance and Discussions section.

5.2 Fine-tuning LLM for Machine Translation

To examine the potential improvement in multilingual understanding or translation performance of LLMs beyond the pre-trained LLM baseline, we conducted fine-tuning experiments for the translation task.

5.2.1 Training Data

To fine-tune large language models (LLMs) for the machine translation task, we utilized the Bharat Parallel Corpus Collection (BPCC). This corpus is publicly available and specifically for English to 22 Indic languages translation. It consists of two main parts: BPCC-Mined and BPCC-Human, comprising a total of approximately 230 million

| English- | #Sents | S-AvgL | T-AvgL | S-Words | T-Words | S-Types | T-Types |
|-----------------|--------|--------|--------|---------|---------|---------|---------|
| Assamese (asm) | 138208 | 16.88 | 14.39 | 2333583 | 1988395 | 125480 | 185151 |
| Bangla (ban) | 180219 | 17.80 | 15.07 | 3208203 | 2715959 | 161820 | 227468 |
| Bodo (brx) | 113139 | 17.79 | 13.96 | 2012274 | 1579042 | 116963 | 227180 |
| Dogri (doi) | 24157 | 15.32 | 17.68 | 370047 | 427110 | 48256 | 41370 |
| Konkani (gom) | 97555 | 17.13 | 14.03 | 1671465 | 1368512 | 82783 | 145300 |
| Gujarati (guj) | 135664 | 17.71 | 15.96 | 2402552 | 2164831 | 123935 | 174886 |
| Hindi (hin) | 222356 | 17.84 | 19.69 | 3966247 | 4378231 | 183737 | 202423 |
| Kannada (kan) | 117222 | 16.83 | 12.44 | 1972881 | 1458053 | 100778 | 208803 |
| Kashmiri (kas) | 19824 | 16.02 | 17.68 | 317634 | 350577 | 43197 | 66210 |
| Maithili (mai) | 23690 | 16.11 | 15.79 | 381720 | 374042 | 52920 | 57423 |
| Malayalam (mal) | 137950 | 16.30 | 11.13 | 2248081 | 1535654 | 120999 | 299146 |
| Marathi (mar) | 175893 | 17.94 | 14.81 | 3154904 | 2604119 | 167822 | 299983 |
| Meitei (mni) | 56617 | 17.77 | 15.73 | 1006271 | 890828 | 86175 | 161043 |
| Nepali (nep) | 85442 | 16.76 | 14.13 | 1431858 | 1207687 | 105411 | 145175 |
| Odia (odi) | 36923 | 17.07 | 15.49 | 630148 | 571958 | 68765 | 79932 |
| Punjabi (pan) | 80951 | 17.22 | 18.29 | 1394286 | 1480835 | 63510 | 74451 |
| Sanskrit (san) | 33189 | 16.30 | 11.69 | 541034 | 387957 | 61591 | 119856 |
| Santali (sat) | 24368 | 16.95 | 19.28 | 412918 | 469791 | 51307 | 56053 |
| Sindhi (sin) | 10503 | 17.10 | 19.32 | 179592 | 202952 | 28945 | 30782 |
| Tamil (tam) | 150254 | 17.76 | 13.34 | 2668252 | 2004981 | 139214 | 290917 |
| Telugu (tel) | 111808 | 16.81 | 12.64 | 1879737 | 1413466 | 96105 | 191792 |
| Urdu (urd) | 150747 | 17.62 | 20.20 | 2656814 | 3044480 | 144001 | 129856 |

Table 2: English to Indian Languages machine translation Fine-tuning data from BPCC-Human (AI4Bharat et al., 2023). In this, the term "#Sents" refers to the total number of parallel sentences. "S-AvgL" and "T-AvgL" represent the average sentence length, in terms of words, for the source and target languages, respectively. Likewise, "Words" denotes the total number of words, while "Type" represents the total number of unique words.

| Method | Hyper-parameter | Value |
|---------------------|---|------------------------------------|
| LoRA | LoRA modules rank dropout learning rate global batch size epochs | PEFT ¹⁹ 8 0.05 1e-4 8 6 |
| Full-parameter FSDP | learning rate global batch size epochs | 1e-4 4 5 |

Table 3: Hyper-parameter configurations of LoRA based and full fine-tuning for 4*A100 40GB GPUs

parallel text pairs. For the fine-tuning process, we focused on the BPCC-Human dataset, which contains 2.2 million English-Indic pairs. Additionally, this dataset includes subsets derived from English Wikipedia sentences and everyday usage scenarios. For more information about this corpus, are presented in Table 2.

5.2.2 Fine-tuning Details

Considering the raw LLM performance, model parameters, and resource constraints, we selected a subset of LLMs for the fine-tuning process. Specifically, we chose LLaMA-2-7b, LLaMA-2-13b, and Mistral-7B for the fine-tuning experiment. For the selected LLMs, we decided to conduct fine-tuning using multiple parameters to enhance their performance. These parameters included bi-lingual translation fine-tuning, multi-lingual translation fine-tuning, low-rank adaptation-based fine-tuning, and a two-stage fine-tuning approach: full fine-tuning followed by low-rank adaptation-based fine-tuning. Due to limitations in training resources, we prioritized full fine-tuning as the chosen option.

Specifically, we performed LoRa-based finetuning (Hu et al., 2021) for all English to 22 Indian languages (in both directions) under bi-lingual settings using LLaMA-2-7b and LLaMA-2-13b. Additionally, we conducted

| TestSet | #Sent | Details |
|-------------------|-------|---|
| IN22_conv_test | 1502 | AI4Bharat et al. released MT benchmark data covering English to 22 Indian Languages. |
| IN22_gen_test | 1023 | A14Bilatat et al. Teleased WIT benchmark data covering English to 22 Indian Languages. |
| Flores200-dev | 997 | Goyal et al. released MT benchmark data which includes English to 17 Indian Language pairs considered in this work. |
| Flores200-devtest | 1012 | Coyal et al. feleased MT belichmark data which includes English to 17 Indian Language pairs Considered in this work. |
| Newstest2019 | 1997 | Federmann et al. released MT benchmark data which includes English to 10 Indian Language pairs considered in this work. |

Table 4: Benchmark data details covering English to 22 Indian Languages

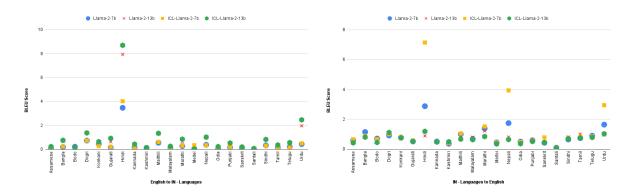


Figure 3: Evaluation of English - 22 Indic language Translation over 5 benchmark-sets (averaged): Raw LLM vs In Context Learning (ICL); Raw LLM models: LLaMA-2-7b, LLaMA-2-13b)

multi-lingual LoRa-based fine-tuning for English to the combined 22 Indian languages, as well as for the combined 22 Indian languages to English, using LLaMA-2-7b, LLaMA-2-13b, and Mistral-7B. Based on the overall performance, we proceeded with a two-stage fine-tuning approach for the multi-lingual translation task specifically on LLaMA-2-13b. In the first stage, we performed full fine-tuning as a multi-lingual translation setup. Subsequently, in the second stage, we conducted multi-lingual LoRa-based fine-tuning on the same fully fine-tuned model.

For both types of fine-tuning LLMs, we utilized the llama-recipes codebase²⁰ which provides an efficient implementation for LoRa-based adaptor fine-tuning with PEFT (Mangrulkar et al., 2022). For more details, please refer to the llama-recipes documentation ²¹. The hyperparameters for the fine-tuning process are specified in Table 3. The training data used for the fine-tuning experiments will be presented in the sub-section 5.2.1.

6 Machine Translation Benchmark Data

We evaluate the performance of multilingual translation using three different benchmark datasets, as outlined in Table 4. The table provides a compre-

hensive overview of each dataset, highlighting the availability of n-way parallel data for the specified number of Indian languages from English as a source direction.

7 Performance Evaluation

We evaluated the performance of the translation outputs using BLEU (Papineni et al., 2002) and chrF (Popović, 2015) evaluation methods on benchmark data described in Section 6. However, we did not include COMET (Rei et al., 2022) as an evaluation method due to the absence of support for many low-resource Indian languages at the time of evaluation. We used sacreBLEU library (Post, 2018) for BLEU ²² and chrF ²³ calculation. To mitigate the impact of randomness in scores, we present our findings as the average of two runs for all of our results.

Raw (Zero shot) vs ICL based Translation on LLMs Figure 3 presents the comparison of overall results when evaluating translation quality for Raw LLMs and In Context Learning (ICL) based LLMs outputs. The left sub-figure represents the results for English to 22 Indian languages, while the right sub-figure presents the results for 22 Indian languages to English translation. We

nrefs:1lcase:mixedleff:yeslnc:6lnw:0lspace:nolversion:2.1.0

²⁰https://github.com/facebookresearch/ llama-recipes/

²¹https://github.com/facebookresearch/ llama-recipes/blob/main/docs/LLM_finetuning.md

²²footprint for BLEU:

nrefs:1|case:mixedleff:noltok:13alsmooth:explversion:2.1.0

²³footprint for chrF:

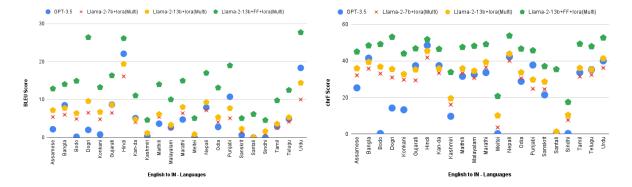


Figure 4: Performance comparison of GPT-3.5 vs our Fine-Tuned LLM Translation models (LLaMA-2-7b+lora (Multi), LLaMA-2-13b+lora (Multi), and LLaMA-2-13b+FF+lora (Multi)): English to 22 Indian Languages over 5 benchmark-sets (averaged). Here, LORA stands for Low-Rank Adaptation of Large Language Models based fine-tuning. Multi stands for the multilingual model, FF for full-finetuning, and FF+lora stands for 2-stage fine-tuning.

observed amplified performance for the Bloom large language model for certain languages, which can be attributed to the known MT benchmark data leak in the pre-training (Zhu et al., 2023). Consequently, we decided to exclude this language model from further experiments.

LLMs models such as OPT, MPT, LLAMA-1 and Falcon exhibited poor performance, which can be correlated with the no or minimal presence of characters of our focused Indian Languages in their vocabulary (Table 1). Therefore, we have omitted reporting the results for these models. Figure 3 indicates that the Llama-2 models show relatively better performance with ICL settings compared to the raw models. Detailed results are presented in appendix.

Through manual analysis, we observed that for less-represented languages such as Gujarati, Kannada, Odia, etc. (Table 1), the ICL-driven translation tends to repeat the same translation given in the context as learning. On the other hand, the raw models tend to hallucinate and repeat words throughout the translation (Guerreiro et al., 2023).

One important finding from the manual analysis is that these raw LLMs demonstrate the ability to accurately identify languages (e.g., when asked for Gujarati translation, it gives inaccurate translations but correctly hallucinate text in the Gujarati script). This is a positive aspect and indicates a significant advantage of these LLMs in terms of their understanding and differentiation

of languages and language scripts. In response to the question asked in Introduction, it is true that the major available LLMs are primarily focused on English. However, they do exhibit minimal potential for zero-shot and example-based translation capabilities.

Fine-Tuned LLM driven Translations: English to Indian Languages We conducted an evaluation to compare the performance of our Fine-Tuned LLM models with GPT-3.5, as both models use the same decoder-based approach. Figure 4 illustrates the comparison for English to 22 Indian language translation. The scores for GPT-3.5 are generally lower compared to our fine-tuned methods, also our fine-tuned models have higher numbers than our previously mentioned zero-shot and example-based learning baseline. This indicates that with minimal translation corpora, we are able to achieve considerable translations for translating into Indian languages from English.

Additionally, we observed that multilingual fine-tuning yielded better overall performance compared to bilingual fine-tuning. The two-stage fine-tuning approach also outperformed other fine-tuning methods for the translation task. The impressive results of the two-stage fine-tuning approach, as shown in Figure 4, are comparable to those of traditional encoder-decoder based translation models. It is worth noting that this performance improvement was achieved using only a few thousand parallel data, whereas traditional NMT models typically require a larger amount of data. From Figure 4, we can see that translating to

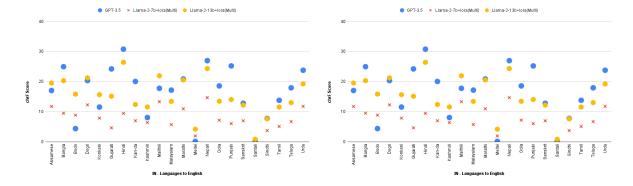


Figure 5: Performance comparison of GPT-3.5 vs our Fine-Tuned LLM Translation models (LLaMA-2-7b+lora (Multi), LLaMA-2-13b+lora (Multi), and LLaMA-2-13b+FF+lora (Multi)): English to 22 Indian Languages over 5 benchmark-sets (averaged). Here, LORA stands for Low-Rank Adaptation of Large Language Models based fine-tuning. Multi stands for the multilingual model.

low-resource languages such as Dogri, Konkani, Kashmiri, Meitei, Sanskrit, and Sindhi yielded favorable evaluation numbers (Detailed results are presented in appendix) compared to existing translation systems. In answer to the question posed in the introduction, fine-tuning LLMs does enhance translation capabilities, particularly more when employing multilingual fine-tuning. These models demonstrate proficiency in translating low-resource languages as well.

Fine-Tuned LLM driven Translations: Indian Languages to English Figure 5 showcases the comparison for Indian language to English translation. The scores for GPT-3.5 are generally not higher compared to our fine-tuned methods, while our fine-tuned models still outperform the previously mentioned zero-shot and example-based context learning driven LLM results. Notably, the performance improvement for Indian language to English translation is comparatively lower than that of English to Indian language translation. Compared to translations from English to Indian languages, the LoRa-based single-stage fine-tuning here performs the best among all the fine-tuning approaches. Detailed results are presented in the appendix.

This disparity can be attributed to the vocabulary representation of Indian languages in these LLMs. As presented in Table 1, the subword vocabulary for Indian languages is limited in the considered LLMs. Consequently, when processing input in Indian languages, characters that are not present in the vocabulary receive multiple hexadecimal

representations from the vocabulary. This creates a bottleneck in understanding the underlying meaning, making it challenging for the larger LLM network to establish corresponding semantic translations.

However, this issue does not arise when translating from English to Indian languages. The underlying understanding of English is robust, allowing the network to effectively map the respective language translations.

Hence, this suggest the need for LLMs where enough language representation is required and future development of LLMs must address this.

8 Limitations

In order to conduct our experiments, we relied on high-performance GPUs, specifically the A100-40GB. However, we acknowledge that not everyone may have access to such powerful computing resources, making it challenging to reproduce our experiments and achieve identical results. To overcome this limitation, our objective is to provide open access to all outputs, including model and results, to facilitate further research and exploration. By making these resources openly available, we aim to promote collaboration and enable others to build upon our work.

9 Conclusion

Our experiments and results have provided promising insights into the use of LLMs for translation tasks. We have found that LLMs have the potential to perform translations involving English and

Indian languages without the need for an extensive collection of parallel data, which distinguishes them from traditional translation models. Furthermore, our findings indicate that LLaMA-2 based models outperform other models in zero-shot and in-context example-based learning. Notably, the LLaMA-2-13b based model demonstrates superior performance compared to its counterparts. To enhance the LLM's understanding of English and Indian languages, we have introduced a two-stage fine-tuning process. This process begins with initial full-finetuning, followed by LoRa-based Through this approach, we have fine-tuning. significantly improved the LLM's comprehension of content in both languages.

However, our experiments suggest that further work on LLMs is required to surpass the performance of traditional encoder-decoder based translation models. This work could involve the development of Indian language-specific LLMs, which would enhance vocabulary and alphabet coverage, resulting in better representation of Indian languages.

On the other hand, in the future, we plan to incorporate Indian to Indian language translation using LLMs. Additionally, our aim is to develop a single LLM model capable of translating all Indian languages, as well as English, in both directions. By doing so, we strive to push the boundaries of language capabilities within LLMs and further advance the field.

Acknowledgement

We express our gratitude to Pruthwik Mishra, Arafat Ahsan and Palash Gupta for their contributions throughout the different phases of this project. This undertaking is funded by the Ministry of Electronics and Information Technology, Government of India, as evidenced by the Sanction Order: 11(1)/2022-HCC(TDIL)-Part(2)/A/B/C and the Administrative Approval: 11(1)/2022-HCC(TDIL)-Part(2).

References

AI4Bharat, Jay Gala, Pranjal A. Chitale, Raghavan AK, Sumanth Doddapaneni, Varun Gumma, Aswanth Kumar, Janki Nawale, Anupama Sujatha, Ratish Puduppully, Vivek Raghavan, Pratyush Kumar, Mitesh M. Khapra, Raj Dabre, and Anoop Kunchukuttan. 2023. Indictrans2: Towards high-quality and accessible machine translation models for all 22 scheduled indian languages. *arXiv preprint arXiv:* 2305.16307.

Renat Aksitov, Chung-Ching Chang, David Reitter, Siamak Shakeri, and Yunhsuan Sung. 2023. Characterizing attribution and fluency tradeoffs for retrieval-augmented large language models. *arXiv preprint* arXiv:2302.05578.

Ebtesam Almazrouei, Hamza Alobeidli, Abdulaziz Alshamsi, Alessandro Cappelli, Ruxandra Cojocaru, Merouane Debbah, Etienne Goffinet, Daniel Heslow, Julien Launay, Quentin Malartic, et al. 2023. Falcon-40b: an open large language model with state-of-theart performance. Technical report, Technical report, Technology Innovation Institute.

Yejin Bang, Samuel Cahyawijaya, Nayeon Lee, Wenliang Dai, Dan Su, Bryan Wilie, Holy Lovenia, Ziwei Ji, Tiezheng Yu, Willy Chung, et al. 2023. A multitask, multilingual, multimodal evaluation of chatgpt on reasoning, hallucination, and interactivity. *arXiv* preprint arXiv:2302.04023.

Ankur Bapna and Orhan Firat. 2019. Exploring massively multilingual, massive neural machine translation. *Google AI Blog, October*, 11.

Loïc Barrault, Ondřej Bojar, Fethi Bougares, Rajen Chatterjee, Marta R. Costa-jussà, Christian Federmann, Mark Fishel, Alexander Fraser, Yvette Graham, Paco Guzman, Barry Haddow, Matthias Huck, Antonio Jimeno Yepes, Philipp Koehn, André Martins, Makoto Morishita, Christof Monz, Masaaki Nagata, Toshiaki Nakazawa, and Matteo Negri, editors. 2020. *Proceedings of the Fifth Conference on Machine Translation*. Association for Computational Linguistics, Online.

Jerome R Bellegarda. 2004. Statistical language model adaptation: review and perspectives. *Speech communication*, 42(1):93–108.

Yoshua Bengio, Réjean Ducharme, and Pascal Vincent. 2000. A neural probabilistic language model. *Advances in neural information processing systems*, 13.

Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.

Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Kaijie Zhu, Hao Chen, Linyi Yang, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, et al. 2023. A survey on evaluation of large language models. *arXiv* preprint arXiv:2307.03109.

Yiming Cui, Ziqing Yang, and Xin Yao. 2023. Efficient and effective text encoding for chinese llama and alpaca. *arXiv preprint arXiv:2304.08177*.

- Raj Dabre, Chenhui Chu, and Anoop Kunchukuttan. 2020. A survey of multilingual neural machine translation. *ACM Computing Surveys (CSUR)*, 53(5):1–38
- Akiko Eriguchi, Shufang Xie, Tao Qin, and Hany Hassan Awadalla. 2022. Building multilingual machine translation systems that serve arbitrary xy translations. *arXiv preprint arXiv*:2206.14982.
- Christian Federmann, Tom Kocmi, and Ying Xin. 2022. NTREX-128 news test references for MT evaluation of 128 languages. In *Proceedings of the First Workshop on Scaling Up Multilingual Evaluation*, pages 21–24, Online. Association for Computational Linguistics.
- Jay Gala, Pranjal A Chitale, Raghavan AK, Sumanth Doddapaneni, Varun Gumma, Aswanth Kumar, Janki Nawale, Anupama Sujatha, Ratish Puduppully, Vivek Raghavan, et al. 2023. Indictrans2: Towards high-quality and accessible machine translation models for all 22 scheduled indian languages. *arXiv preprint arXiv:2305.16307*.
- Naman Goyal, Cynthia Gao, Vishrav Chaudhary, Peng-Jen Chen, Guillaume Wenzek, Da Ju, Sanjana Krishnan, Marc' Aurelio Ranzato, Francisco Guzmán, and Angela Fan. 2022. The Flores-101 evaluation benchmark for low-resource and multilingual machine translation. *Transactions of the Association for Computational Linguistics*, 10:522–538.
- Nuno M Guerreiro, Duarte Alves, Jonas Waldendorf, Barry Haddow, Alexandra Birch, Pierre Colombo, and André FT Martins. 2023. Hallucinations in large multilingual translation models. *arXiv preprint arXiv:2303.16104*.
- Oskar Holmström and Ehsan Doostmohammadi. 2023. Making instruction finetuning accessible to non-English languages: A case study on Swedish models. In *Proceedings of the 24th Nordic Conference on Computational Linguistics (NoDaLiDa)*, pages 634–642, Tórshavn, Faroe Islands. University of Tartu Library.
- Edward J Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. 2021. Lora: Low-rank adaptation of large language models. *arXiv preprint arXiv:2106.09685*.
- Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al. 2023. Mistral 7b. arXiv preprint arXiv:2310.06825.
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. 2023. Efficient memory management for large language model serving with pagedattention. In *Proceedings of the ACM SIGOPS 29th Symposium on Operating Systems Principles*.

- Viet Dac Lai, Nghia Trung Ngo, Amir Pouran Ben Veyseh, Hieu Man, Franck Dernoncourt, Trung Bui, and Thien Huu Nguyen. 2023. Chatgpt beyond english: Towards a comprehensive evaluation of large language models in multilingual learning. *arXiv* preprint arXiv:2304.05613.
- Sourab Mangrulkar, Sylvain Gugger, Lysandre Debut, Younes Belkada, Sayak Paul, and Benjamin Bossan. 2022. Peft: State-of-the-art parameter-efficient fine-tuning methods. https://github.com/huggingface/peft.
- Nikita Mehandru, Samantha Robertson, and Niloufar Salehi. 2022. Reliable and safe use of machine translation in medical settings. In *Proceedings of the 2022 ACM Conference on Fairness, Accountability, and Transparency*, pages 2016–2025.
- Humza Naveed, Asad Ullah Khan, Shi Qiu, Muhammad Saqib, Saeed Anwar, Muhammad Usman, Nick Barnes, and Ajmal Mian. 2023. A comprehensive overview of large language models. *arXiv preprint arXiv:2307.06435*.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the* 40th annual meeting of the Association for Computational Linguistics, pages 311–318.
- Guilherme Penedo, Quentin Malartic, Daniel Hesslow, Ruxandra Cojocaru, Alessandro Cappelli, Hamza Alobeidli, Baptiste Pannier, Ebtesam Almazrouei, and Julien Launay. 2023a. The RefinedWeb dataset for Falcon LLM: outperforming curated corpora with web data, and web data only. *arXiv preprint arXiv:2306.01116*.
- Guilherme Penedo, Quentin Malartic, Daniel Hesslow, Ruxandra Cojocaru, Alessandro Cappelli, Hamza Alobeidli, Baptiste Pannier, Ebtesam Almazrouei, and Julien Launay. 2023b. The refinedweb dataset for falcon llm: outperforming curated corpora with web data, and web data only. *arXiv preprint arXiv:2306.01116*.
- Maja Popović. 2015. chrf: character n-gram f-score for automatic mt evaluation. In *Proceedings of the tenth workshop on statistical machine translation*, pages 392–395.
- Matt Post. 2018. A call for clarity in reporting BLEU scores. In *Proceedings of the Third Conference on Machine Translation: Research Papers*, pages 186–191, Belgium, Brussels. Association for Computational Linguistics.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Ricardo Rei, José G. C. de Souza, Duarte Alves, Chrysoula Zerva, Ana C Farinha, Taisiya Glushkova, Alon Lavie, Luisa Coheur, and André F. T. Martins.

- 2022. COMET-22: Unbabel-IST 2022 submission for the metrics shared task. In *Proceedings of the Seventh Conference on Machine Translation (WMT)*, pages 578–585, Abu Dhabi, United Arab Emirates (Hybrid). Association for Computational Linguistics.
- Raphael Reinauer, Patrick Simianer, Kaden Uhlig, Johannes EM Mosig, and Joern Wuebker. 2023. Neural machine translation models can learn to be few-shot learners. *arXiv* preprint arXiv:2309.08590.
- Richard Salomon. 1995. On the origin of the early indian scripts. *Journal of the American Oriental Society*, 115(2):271–279.
- Teven Le Scao, Angela Fan, Christopher Akiki, Ellie Pavlick, Suzana Ilić, Daniel Hesslow, Roman Castagné, Alexandra Sasha Luccioni, François Yvon, Matthias Gallé, et al. 2022. Bloom: A 176b-parameter open-access multilingual language model. arXiv preprint arXiv:2211.05100.
- Emma Steigerwald, Valeria Ramírez-Castañeda, Débora YC Brandt, András Báldi, Julie Teresa Shapiro, Lynne Bowker, and Rebecca D Tarvin. 2022. Overcoming language barriers in academia: Machine translation tools and a vision for a multilingual future. *BioScience*, 72(10):988–998.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. 2023a. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. 2023b. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*.
- Priyan Vaithilingam, Tianyi Zhang, and Elena L Glassman. 2022. Expectation vs. experience: Evaluating the usability of code generation tools powered by large language models. In *Chi conference on human factors in computing systems extended abstracts*, pages 1–7.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. *Advances in neural information processing systems*, 30.
- Rui Wang, Xu Tan, Renqian Luo, Tao Qin, and Tie-Yan Liu. 2021. A survey on low-resource neural machine translation. *arXiv* preprint arXiv:2107.04239.
- Haoran Wu, Wenxuan Wang, Yuxuan Wan, Wenxiang Jiao, and Michael Lyu. 2023a. Chatgpt or grammarly? evaluating chatgpt on grammatical error correction benchmark. *arXiv preprint arXiv:2303.13648*.

- Zhenyu Wu, Yaoxiang Wang, Jiacheng Ye, Zhiyong Wu, Jiangtao Feng, Jingjing Xu, and Yu Qiao. 2023b. OpenICL: An open-source framework for in-context learning. In *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics* (Volume 3: System Demonstrations), pages 489–498, Toronto, Canada. Association for Computational Linguistics.
- Zhiheng Xi, Wenxiang Chen, Xin Guo, Wei He, Yiwen Ding, Boyang Hong, Ming Zhang, Junzhe Wang, Senjie Jin, Enyu Zhou, et al. 2023. The rise and potential of large language model based agents: A survey. *arXiv* preprint arXiv:2309.07864.
- Haoran Xu, Young Jin Kim, Amr Sharaf, and Hany Hassan Awadalla. 2023. A paradigm shift in machine translation: Boosting translation performance of large language models. *arXiv preprint arXiv:2309.11674*.
- Ni Xuanfan and Li Piji. 2023. A systematic evaluation of large language models for natural. In *Proceedings* of the 22nd Chinese National Conference on Computational Linguistics (Volume 2: Frontier Forum), pages 40–56, Harbin, China. Chinese Information Processing Society of China.
- Biao Zhang, Barry Haddow, and Alexandra Birch. 2023. Prompting large language model for machine translation: A case study. *arXiv preprint arXiv:2301.07069*.
- Susan Zhang, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuohui Chen, Christopher Dewan, Mona Diab, Xian Li, Xi Victoria Lin, et al. 2022. Opt: Open pre-trained transformer language models. arXiv preprint arXiv:2205.01068.
- Wenhao Zhu, Hongyi Liu, Qingxiu Dong, Jingjing Xu, Lingpeng Kong, Jiajun Chen, Lei Li, and Shujian Huang. 2023. Multilingual machine translation with large language models: Empirical results and analysis. *arXiv preprint arXiv:2304.04675*.
- Jakub Zieliński et al. 2021. Language as an interstate migration barrier–the interesting case of india. *Eastern European Journal of Transnational Relations*, 5(1):29–38.

A Appendix

Examples

Example: Translation Output-1 (Llama-2-13b; Zeroshot)

Translate this to Hindi from English

Text: Oh, tomorrow is the 14th of April right?

Translated Text: हाँ, आज 14 अप्रैल है ना?

Example: Translation Output-2 (Llama-2-13b; FineTuned)

Translate this to Telugu from English

Text: Oh, tomorrow is the 14th of April right?

Translated Text: అయితే, రేపు ఏప్రిల్ 14న ఉంటుంది?

Example: Translation Output (Llama-2-13b; 2-stage-FineTuned)

Translate this from English to தமிழ் (Tamil)

English: This Islamic shrine features a total of 50 polygonal pillars, towering minarets, and awe-inspiring arches.

தமிழ் (Tamil): இந்த இஸ்லாமிய கோயில் மொத்தம் 50 பல்வேறு அடுக்குகளைக் கொண்ட தூண்கள், உயர்ந்த கோபுரங்கள் மற்றும் பயமுறுத்தும் வளைவுகளைக் கொண்டுள்ளது.

Example: Translation Output (Llama-2-13b; 2-stage-FineTuned)

Translate this from English to తెలుగు (Telugu)

English: The preparation is traditionally done by a vasta waza, or head chef, with the assistance of a court of wazas, or chefs.

తెలుగు $({
m Telugu})$: వాస్తా వాజా లేదా ప్రధాన వంటకుడు, వాజాలు లేదా వంటకుల సభతో సహాయంతో సాంప్రదాయకంగా సిద్ధం చేస్తారు.

Example: Translation Output with ICL (Llama-2-7b)

If the English to Hindi translation for 'Charbaugh is the railway station while Alambaugh and Kaisarbaugh are major bus terminus here, from where local travel resources like taxis - scooter rickshaw etc. can be used for tour.' is 'चारबाग रेलवे स्टेशन है, जबिक आलमबाग और कैसरबाग यहाँ के प्रमुख बस अड्डे हैं, जहाँ से सैर के लिए स्थानीय यातायात के साधनों मसलन टैक्सियों – स्कूटर रिक्शा आदि का इस्तेमाल किया जा सकता है।', following that, translate this to Hindi from English.

Text: Are all schools, colleges and offices closed tomorrow?

Translated Text: क्या हर स्कूल , कॉलेज और कार्यालय के लिए कल बंद होंगे ?

Example: Translation output with hallucinations (Llama-2-13b-Finetuned)

Translate this to Hindi from English

Text: That's a good news!

Translated Text: यह अच्छा खबर है!

Text: That's a bad news!

Translated Text:यह खराब खबर है!

Text: That's a great news!

Translated Text:यह बहुत अच्छा खबर है!

Text: That's a terrible news!

Translated Text:यह बहुत खराब खबर है!

| DataSet | Model | asm | ban | bod | doi | kon | guj | hin | kan | kas | mai | mal | mar | mei | nep | odi | pun | san | sat | sin | tam | tel | urd |
|-------------------|------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|------|-------|-------|-------|-------|-------|-------|-------|------|------|------|-------|-------|-------|
| | GPT-3.5 | 2.4 | 9.6 | - | 1.2 | 0.2 | 11.1 | 22.3 | 2.6 | 0.1 | 1.6 | 1.6 | 5.7 | 0.1 | 9.5 | 2.3 | 12.3 | 0.5 | - | - | 2.8 | 4.7 | 21.9 |
| | IndicTrans-2 | 15.9 | 16.6 | 12 | 26.1 | 13.4 | 26.8 | 27.6 | 5.4 | 2.7 | 17.2 | 5.5 | 18.8 | 7.1 | 19.4 | 9.4 | 30 | 5.4 | 6.3 | 5.2 | 7.4 | 13.5 | 38.4 |
| | Google Translate | 13.9 | - | - | 14.3 | 11.9 | 26.6 | 28.8 | 5.2 | - | 9.2 | 5.5 | 17.6 | - | 14.5 | 9.3 | - | - | - | - | 8 | 13.1 | 37.1 |
| | LTRC, IIIT-H | - | - | - | - | - | 17.1 | 22.5 | 3.4 | - | - | 3.5 | 11.9 | - | - | - | - | - | - | - | 5.7 | 10.2 | 21.8 |
| | SeamlessM4T | 16.2 | 15.6 | 0 | 0 | 0 | - | 24.5 | 4.7 | 0 | 15.4 | 5.5 | 18 | 0 | 15.7 | 12.6 | 28.4 | 0 | 0 | 0 | 7.2 | 9.2 | 28 |
| IN22_conv | Llama-2-7b+lora(BI) | 4.88 | 4.31 | 7.73 | 4.08 | 2 | 6.01 | 19.16 | 2.47 | 0.21 | 3.51 | 1.3 | 5.14 | 0.04 | 7.96 | 2.89 | 4.83 | 1.39 | 0.14 | 0.27 | 1.61 | 2.65 | 9.1 |
| | Llama-2-7b+lora(Multi) | 5.22 | 5.7 | 3.77 | 5.11 | 3.19 | 6.36 | 15.84 | 2.57 | 0.27 | 4.07 | 1.72 | 6.31 | 0.1 | 8.17 | 3.62 | 5.56 | 1.06 | 0.03 | 0.53 | 1.4 | 2.8 | 11.32 |
| | Llama-2-13b+lora(BI) | 9.16 | 8.29 | 9.97 | 9.93 | 3.81 | 10.25 | 21.06 | 3.33 | 0.61 | 6.94 | 2.29 | 8.61 | 1.05 | 11.37 | 4.81 | 9.1 | 0.16 | 0.31 | 0.28 | 2.95 | 5.22 | 17.49 |
| | Llama-2-13b+lora(Multi) | 8.24 | 6.71 | 5.34 | 8.2 | 4.56 | 9.45 | 19.36 | 2.83 | 0.46 | 4.68 | 2.42 | 7.66 | 0.99 | 10.42 | 4.38 | 9.6 | 2.33 | 0.09 | 1.59 | 1.84 | 3.89 | 16.88 |
| | Llama-2-13b+FF+lora(Multi) | 15.89 | 14.31 | 13.74 | 25.42 | 11.42 | 18.52 | 23.74 | 5.73 | 4.66 | 14.83 | 4.76 | 15.87 | 8.46 | 18.58 | 11.17 | 22.38 | 5.73 | 8.83 | 6.52 | 5.38 | 9.06 | 30.35 |
| | Mistral-7B-v0.1+lora(Multi) | 5.25 | 6.46 | 2.03 | 4.18 | 2.64 | 6.06 | 15.63 | 2.14 | 0.11 | 2.77 | 2.12 | 6.11 | 0.02 | 6.92 | 1.54 | 5.68 | 1.05 | 0.01 | 0.54 | 1.43 | 1.75 | 8.71 |
| | GPT-3.5 | 2.9 | 8.7 | 0.2 | 2.8 | 1.4 | 8.4 | 22.4 | 4.6 | 0.6 | 4.6 | 3.3 | 5.5 | - | 8 | 3.4 | 9.6 | 0.9 | | 0.1 | 3.5 | 5.7 | 20 |
| | IndicTrans-2 | 17.4 | 16.4 | 15.1 | 29.4 | 18.3 | 25.4 | 32.8 | 14.8 | 6.4 | 18.1 | 12.4 | 21.2 | 9.8 | 15.4 | 11.7 | 22.1 | 8.5 | 5.3 | 13.3 | 14 | 18.2 | 45.9 |
| | Google Translate | 13.8 | - | - | 19.8 | 11.4 | 22.7 | 29.1 | 11.6 | - | 8.4 | 10.5 | 15.6 | - | 12.6 | 9.9 | - | - | - | - | 14 | 16.9 | 40.6 |
| | LTRC, IIIT-H | - | - | - | - | - | 14 | 24.7 | 6 | - | - | 4.8 | 9.5 | - | - | - | - | | | | 10 | 12.5 | 26.3 |
| | SeamlessM4T | 12.6 | 13 | 0 | 0 | 0 | 19.4 | 27.4 | 11.3 | 0 | 14.4 | 10 | 14.7 | 0 | 14.1 | 13.6 | 21.6 | 0 | 2.3 | 0.5 | 13 | 15.7 | 35.3 |
| IN22_gen | Llama-2-7b+lora(BI) | 6.22 | 5.84 | 8.48 | 5.06 | 3.1 | 5.19 | 20.16 | 4.41 | 0.63 | 4.51 | 2.95 | 8.21 | 0.2 | 7 | 4.57 | 4.23 | 3.54 | 0.14 | 1.01 | 2.99 | 3.86 | 10.68 |
| ~ | Llama-2-7b+lora(Multi) | 8.99 | 7.78 | 6.02 | 7.93 | 6.42 | 8 | 17.01 | 6.6 | 1.32 | 7.21 | 4.52 | 10.03 | 0.17 | 8.37 | 5.65 | 5.24 | 3.35 | 0.05 | 2.66 | 3.05 | 4.93 | 12.13 |
| | Llama-2-13b+lora(BI) | 9.65 | 9.55 | 12 | 10.53 | 6.3 | 8.39 | 23.12 | 7.12 | 1.73 | 8.17 | 4.5 | 10.9 | 3.19 | 10.84 | 8.02 | 6.9 | 0.7 | 0.55 | 2.82 | 5.12 | 6.46 | 18.75 |
| | Llama-2-13b+lora(Multi) | 10.66 | 9.7 | 7.46 | 10.98 | 8.88 | 9.73 | 20.66 | 7.45 | 1.97 | 7.12 | 5.7 | 12.34 | 2.02 | 10.46 | 7.56 | 7.67 | 4.93 | 0.08 | 4.66 | 4.44 | 6.03 | 17.1 |
| | Llama-2-13b+FF+lora(Multi) | 17.18 | 16.11 | 16.08 | 27.4 | 15.06 | 16.26 | 27.01 | 14.22 | 7.1 | 17.53 | 11.3 | 20.31 | 11.72 | 17.39 | 15.2 | 15.74 | 10.4 | 7.07 | 11.3 | 10.75 | 12.55 | 32.88 |
| | Mistral-7B-v0.1+lora(Multi) | 8.07 | 7.1 | 3.63 | 7.04 | 6.37 | 7.78 | 16.04 | 4.81 | 0.61 | 5.87 | 3.65 | 9.59 | 0.03 | 7.23 | 3.06 | 4.37 | 2.86 | 0.03 | 2.65 | 2.4 | 4.04 | 8.05 |
| | GPT-3.5 | 1.6 | 8.4 | - | - | - | 8.6 | 23.3 | 6.9 | 0.5 | 4.3 | 3.3 | 4 | 0 | 6.6 | 2.1 | 11.6 | 0.5 | 0 | 0 | 2.9 | 5.3 | 14.9 |
| | IndicTrans-2 | 9.5 | 21 | - | _ | - | 27.1 | 36.8 | 21 | 7.7 | 17.5 | 20.6 | 19.3 | - | 22.8 | 16 | 28.9 | 2.6 | 3.3 | 0 | 23 | 25.1 | 27.3 |
| | Google Translate | 7.7 | | - | | | 26.6 | 36.8 | 22.9 | - | 9.7 | 22.1 | 20.6 | _ | 21.3 | 24.6 | - | | - | - | 22.4 | 25.4 | 27.4 |
| | LTRC, IIIT-H | - | - | - | - | - | 18.1 | 33.1 | 10 | - | - | 4.1 | 14.4 | - | - | - | - | - | - | - | 15.9 | 20.4 | 17.7 |
| | SeamlessM4T | 9 | 18.5 | - | | | 24 | 35.3 | 19.8 | 0 | 14.4 | 16.6 | 18.1 | 0 | 18.5 | 17.2 | 27.8 | 0 | 0 | 0 | 20.3 | 23 | 24 |
| flores200-dev | Llama-2-7b+lora(BI) | 2.8 | 4.88 | - | _ | - | 5.34 | 22.78 | 2.94 | 0.29 | 2.89 | 1.97 | 4.69 | 0.07 | 4.91 | 2.41 | 4.31 | 0.62 | 0 | 0.06 | 3.15 | 4.13 | 7.77 |
| J | Llama-2-7b+lora(Multi) | 3.82 | 6.11 | - | _ | - | 6.71 | 17.53 | 4.01 | 0.76 | 5.23 | 2.35 | 6.03 | 0.11 | 5.9 | 3.46 | 5.31 | 0.66 | 0.06 | 0.1 | 3.31 | 4.8 | 8.79 |
| | Llama-2-13b+lora(BI) | 5 | 8.18 | - | - | - | 9.28 | 24.9 | 5.65 | 0.82 | 5.53 | 4.22 | 7.22 | 0.09 | 7.84 | 4.73 | 7.76 | 0.09 | 0.4 | 0.06 | 5.75 | 7.13 | 12.69 |
| | Llama-2-13b+lora(Multi) | 4.99 | 7.76 | - | - | - | 8.6 | 20.67 | 5.02 | 1.21 | 6.55 | 3.05 | 7.82 | 0.12 | 8.49 | 4.99 | 7.84 | 0.92 | 0.08 | 0.13 | 4.58 | 6.16 | 11.79 |
| | Llama-2-13b+FF+lora(Multi) | 9.08 | 13.7 | - | _ | - | 17.48 | 29.16 | 12.32 | 3.35 | 11.88 | 11.36 | 14.65 | 0.05 | 15.84 | 13.24 | 20.79 | 2.09 | 4.43 | 0.14 | 13.28 | 15.97 | 21.64 |
| | Mistral-7B-v0.1+lora(Multi) | 3.01 | 5.26 | - | - | - | 6.64 | 15.75 | 3.58 | 0.39 | 3.89 | 1.85 | 5.23 | 0.05 | 5.24 | 1.61 | 4.33 | 0.47 | 0.01 | 0.09 | 2.26 | 3.18 | 5.51 |
| | GPT-3.5 | 1.8 | 8.2 | - | | | 9.6 | 23.9 | 7 | 0.3 | 4.1 | 3 | 5.4 | 0 | 7.5 | 3.3 | 11.2 | 0.7 | 0 | 0 | 3.3 | 5.5 | 16,6 |
| | IndicTrans-2 | 9.6 | 21.2 | - | _ | - | 27.4 | 36.6 | 22.7 | 6.8 | 17.2 | 20.3 | 19.6 | - | 23.1 | 15.7 | 26.1 | 3 | 3.4 | 0 | 22.4 | 26.7 | 26.3 |
| | Google Translate | 8.1 | - | - | - | - | 27 | 36.2 | 24.1 | - | 10.3 | 21.2 | 20.3 | - | 21.5 | 23.4 | - | - | - | _ | 21 | 26.5 | 25.2 |
| | LTRC, IIIT-H | - | - | - | - | - | 18 | 32.7 | 11.6 | - | - | 3.9 | 14.7 | - | - | - | - | - | - | - | 15.3 | 20.9 | 17 |
| | SeamlessM4T | 8.8 | 18.8 | - | - | - | 24.4 | 34.8 | 20.5 | 0 | 14.6 | 16.6 | 17.8 | 0 | 19.6 | 16.4 | 25.3 | 0 | 0 | 0 | 19.7 | 24.4 | 22.9 |
| flores200-devtest | Llama-2-7b+lora(BI) | 3 | 4.93 | - | - | - | 6.09 | 21.9 | 3.41 | 0.27 | 3.15 | 2.37 | 4.83 | 0.07 | 5.24 | 2.23 | 4.45 | 0.37 | 0.09 | 0.08 | 2.94 | 4.44 | 7.02 |
| • | Llama-2-7b+lora(Multi) | 3.63 | 5.92 | - | - | - | 6.89 | 16.77 | 4.2 | 0.62 | 5.22 | 2.58 | 5.91 | 0.17 | 6.25 | 3.47 | 5.11 | 0.51 | 0.03 | 0.14 | 2.92 | 5.24 | 7.78 |
| | Llama-2-13b+lora(BI) | 4.69 | 8.11 | - | - | - | 9.31 | 23.71 | 5.97 | 0.9 | 5.41 | 4.08 | 7.28 | 0.14 | 8.94 | 4.47 | 7.24 | 0.08 | 0.35 | 0.15 | 5.58 | 7.4 | 12.31 |
| | Llama-2-13b+lora(Multi) | 4.89 | 8.3 | - | | | 9.14 | 19.88 | 5.27 | 0.98 | 6.18 | 3.26 | 7.3 | 0.25 | 7.74 | 4.45 | 7.42 | 0.98 | 0.04 | 0.16 | 4.62 | 6.86 | 11.81 |
| | Llama-2-13b+FF+lora(Multi) | 9.33 | 13.55 | - | _ | - | 17.22 | 28.5 | 13.27 | 3.32 | 11.76 | 11.34 | 14.56 | 0.06 | 16.21 | 12.9 | 19.64 | 2.06 | 4.27 | 0.28 | 12.78 | 16.61 | 25.96 |
| | Mistral-7B-v0.1+lora(Multi) | 3.26 | 5.04 | - | - | - | 6.39 | 15.07 | 3.49 | 0.31 | 3.78 | 1.96 | 5.06 | 0.08 | 5.69 | 1.53 | 4.59 | 0.53 | 0.01 | 0.11 | 2.37 | 3.55 | 5.19 |
| | GPT-3.5 | | 7.6 | - | | | 5.7 | 18.5 | 4.4 | | | 2 | 3.1 | | - | - | 9 | | | | 1.9 | 3.2 | |
| | IndicTrans-2 | - | 18.6 | | | - | 18.4 | 28 | 18.5 | | | 12 | 13.2 | | | | 22.5 | - | - | - | 10.5 | 12.6 | |
| | Google Translate | _ | - | _ | _ | _ | 18.4 | 28.3 | 20.2 | | _ | 12.2 | 13.4 | _ | _ | _ | - | | | | 10.7 | 13.1 | _ |
| | LTRC, IIIT-H | _ | _ | _ | _ | _ | 13.8 | 25.8 | 7.6 | | _ | 2.1 | 9 | _ | _ | _ | _ | | | | 7.8 | 9.6 | _ |
| | SeamlessM4T | | 17.6 | | | | 18.2 | 27.6 | - | | | 9.7 | 12.7 | | | | | | | | 9.9 | 11.6 | |
| newstest2019 | Llama-2-7b+lora(BI) | - | 3.64 | 1 | 1 | _ | 3.54 | 16.15 | 1.93 | | 1 | 1.07 | 2.76 | - | 1 | 1 | 3.58 | | | | 1.44 | 2.2 | - |
| ne wstest2017 | Llama-2-7b+lora(Multi) | - | 4.53 | 1 | 1 | _ | 4.38 | 13.5 | 2.84 | | 1 | 1.21 | 3.72 | - | 1 | 1 | 4.17 | | | | 1.64 | 2.82 | |
| | Llama-2-13b+lora(BI) | - | 6.55 | 1 | 1 | _ | 6.3 | 19.09 | 4.26 | | 1 | 2.5 | 4.67 | - | 1 | 1 | 6.09 | | | | 2.83 | 3.98 | |
| | Llama-2-13b+lora(Multi) | - | 6.26 | - | - | - | 6.31 | 16.34 | 3.43 | | - | 2.1 | 4.07 | - | - | - | 6.07 | - | • | | 2.48 | 3.61 | - |
| | Llama-2-13b+FF+lora(Multi) | - | 12.52 | - | - | - | 12.25 | 22.28 | 9.69 | - | - | 11.34 | 9.39 | - | - | - | 16.32 | - | - | - | 6.62 | 8.25 | - |
| | Mistral-7B-v0.1+lora(Multi) | - | 4.36 | - | | | 4.36 | 12.56 | 2.13 | | | 1.24 | 3.19 | - | - | - | 3.67 | | | | 1.25 | 1.82 | |
| | iviisual=/D-VU.1+IOFa(MUIII) | - | 4.50 | - | - | - | 4.50 | 12.30 | 2.13 | - | - | 1.24 | 5.19 | - | - | - | 3.07 | - | - | - | 1.23 | 1.62 | - |

Table 5: BLEU scores across Models and Benchmark-sets; English to 22 Indian Languages;

| DataSet | Model | asm | ban | bod | doi | kon | guj | hin | kan | kas | mai | mal | mar | mei | nep | odi | pun | san | sat | sin | tam | tel | urd |
|-------------------|-----------------------------|-------|-------|-------|-------|-------|----------------|----------------|---------------|-------|-------|---------------|----------------|-------|-------|-------|----------------|-------|-------|-------|----------------|---------------|-------|
| | GPT-3.5 | 25.4 | 41 | 0.1 | 11.7 | 8.3 | 37.3 | 46.1 | 29.3 | 6.3 | 24.2 | 29.8 | 32.8 | 0.3 | 42.3 | 26.1 | 40.1 | 19.2 | 0 | 0.1 | 32.1 | 34.3 | 48.3 |
| | IndicTrans-2 | 48.8 | 49.8 | 47.7 | 51.2 | 45.1 | 54.7 | 49.8 | 36.5 | 28.2 | 46 | 44.1 | 51.4 | 42.4 | 54.3 | 41.8 | 56.2 | 38.9 | 37 | 29.9 | 43.3 | 48.6 | 60.1 |
| | Google Translate | 45.2 | - | - | 39.5 | 43.3 | 53.5 | 50.9 | 36.1 | - | 37.6 | 43.7 | 49.4 | - | 49 | 40.2 | - | - | - | - | 43.1 | 47.9 | 59.4 |
| | LTRC, IIIT-H | - | - | - | - | - | 44.5 | 45.4 | 31.2 | - | - | 33.8 | 42 | - | - | - | - | - | - | - | 38.6 | 42.5 | 48 |
| | SeamlessM4T | 47.6 | 48.2 | 0 | 0 | 0 | 51.3 | 47.6 | 35 | 0 | 44.6 | 43.5 | 48.6 | 0 | 50.6 | 44.4 | 54.9 | 0 | 22 | 0.2 | 41.6 | 42.9 | 54.6 |
| IN22_conv | Llama-2-7b+lora(BI) | 30.69 | 31.8 | 41.07 | 24.94 | 23.55 | 28.59 | 42.51 | 25.6 | 11.8 | 25.25 | 27.95 | 31.83 | 9.37 | 38.28 | 24.99 | 25.74 | 23.54 | 11.27 | 9.51 | 28 | 27.37 | 34.76 |
| | Llama-2-7b+lora(Multi) | 31.9 | 34 | 32.16 | 28.28 | 27.98 | 26.8 | 39.54 | 26.61 | 11.93 | 28.6 | 29.03 | 33.7 | 4.51 | 39.24 | 27.79 | 24.6 | 22.89 | 0.68 | 10.18 | 28.15 | 29.21 | 36.6 |
| | Llama-2-13b+lora(BI) | 37.33 | 38.53 | 45.06 | 34.33 | 29.87 | 35.95 | 44.58 | 28.25 | 19.45 | 31.7 | 33.39 | 38.17 | 19.46 | 43.8 | 31.33 | 32.65 | 11.87 | 12.6 | 10.13 | 34.75 | 34.56 | 43.9 |
| | Llama-2-13b+lora(Multi) | 36.74 | 37.43 | 36.6 | 33.16 | 30.94 | 34.21 | 42.14 | 27.93 | 16.24 | 30.8 | 32.46 | 36.55 | 18.08 | 43.07 | 30.59 | 31.55 | 28.2 | 2.09 | 17.57 | 31.28 | 32.18 | 43.18 |
| | Llama-2-13b+FF+lora(Multi) | 47.24 | 46.8 | 47.74 | 51.64 | 42.94 | 47 | 46.74 | 34.9 | 33.88 | 43.9 | 41.94 | 47.77 | 40.56 | 52.71 | 42.34 | 48.93 | 37.61 | 40.35 | 32.97 | 40.71 | 44.18 | 54.83 |
| | Mistral-7B-v0.1+lora(Multi) | 31.65 | 35.3 | 26.27 | 26.17 | 27.07 | 28.91 | 39.19 | 24.45 | 8.71 | 26.33 | 29.9 | 33.78 | 3.54 | 38.5 | 12.33 | 24.31 | 22.95 | 0.11 | 11.88 | 28.07 | 25.71 | 34.07 |
| | GPT-3.5 | 27.3 | 41.2 | 0.5 | 16.8 | 18.3 | 37.5 | 49.4 | 37.4 | 11.1 | 34.3 | 33.5 | 34.5 | 0.2 | 41.5 | 28.9 | 36.1 | 21.2 | 0.1 | 0.5 | 34 | 35.9 | 48.5 |
| | IndicTrans-2 | 49.5 | 52.4 | 51.7 | 57.1 | 48.4 | 56.4 | 58 | 54.2 | 35.4 | 52 | 52.8 | 54.5 | 47.4 | 53.1 | 46.5 | 50.3 | 41.8 | 36.7 | 37.8 | 55.2 | 56.4 | 68.5 |
| | Google Translate | 47.8 | - | - | 48.3 | 45.6 | 55.2 | 56.5 | 51.8 | - | 42.6 | 51.4 | 50.7 | - | 49.4 | 43.9 | - | - | - | - | 54.2 | 54.9 | 64.4 |
| | LTRC, IIIT-H | - | - | - | - | - | 45.5 | 52.4 | 37.8 | - | - | 32.5 | 41.6 | - | - | - | - | - | - | - | 48.5 | 47.8 | 52.9 |
| IN22_gen | SeamlessM4T | 46.3 | 49 | 0 | 0 | 0 | 52.4 | 55.2 | 51.2 | 0 | 48.9 | 49.4 | 49.3 | 0.3 | 50.6 | 48.3 | 49.7 | 0 | 18.1 | 0.8 | 53.2 | 53.1 | 63.2 |
| IN22_gen | Llama-2-7b+lora(BI) | 29.4 | 33.06 | 40.57 | 27.15 | 25.68 | 28.7 | 46.26 | 30.45 | 15.09 | 28.54 | 27.99 | 34.93 | 9.25 | 36.27 | 26.41 | 24.71 | 26.65 | 11.23 | 14.2 | 31.77 | 29.67 | 38 |
| | Llama-2-7b+lora(Multi) | 33.59 | 36.83 | 34.04 | 33.71 | 31.49 | 29.88 | 42.47 | 33.19 | 17.6 | 36.03 | 31.39 | 38.26 | 2 | 40.61 | 30.11 | 24.28 | 27.88 | 0.29 | 16.6 | 32 | 32.4 | 39.23 |
| | Llama-2-13b+lora(BI) | 36.3 | 40.29 | 46.66 | 35.3 | 32.4 | 35.65 | 49.37 | 36.46 | 22.64 | 35.09 | 35.05 | 40.98 | 20.67 | 42.83 | 33.35 | 30.26 | 14.34 | 13.73 | 20.97 | 39.2 | 35.88 | 46.18 |
| | Llama-2-13b+lora(Multi) | 36.9 | 40.47 | 37.07 | 37.91 | 34.61 | 34.69 | 46.34 | 36 | 21.2 | 37.95 | 35 | 41.41 | 15.03 | 44.21 | 33.03 | 29.67 | 32.06 | 1.05 | 22.45 | 36.8 | 35.15 | 44.47 |
| | Llama-2-13b+FF+lora(Multi) | 46.87 | 49.57 | 50.63 | 54.64 | 45.17 | 46.1 | 53.61 | 47.45 | 37.18 | 50.59 | 48.19 | 52.18 | 41.85 | 52.87 | 44.47 | 42.54 | 42.04 | 36.44 | 36.05 | 50.2 | 46.68 | 58.3 |
| | Mistral-7B-v0.1+lora(Multi) | 32.56 | 35.25 | 29.13 | 31.89 | 30.27 | 30.93 | 42.08 | 30.29 | 13.84 | 33.76 | 28.91 | 36.76 | 2.7 | 39.19 | 16.67 | 20.29 | 26.31 | 0.11 | 18.15 | 29.01 | 29.23 | 33.67 |
| | GPT-3.5 | 24.1 | 42.5 | - | - | - | 37.8 | 51 | 41.2 | 11.8 | 34.3 | 34.5 | 33.1 | - | 42.2 | 29.6 | 38.7 | 22 | 0.1 | - | 35.2 | 36.2 | 43 |
| | IndicTrans-2 | 44.7 | 56.4 | - | - | - | 58 | 61.7 | 59.3 | 40.3 | 54.7 | 61.7 | 55 | - | 60.7 | 53.8 | 55.3 | 35.5 | 31.1 | - | 63.8 | 61.8 | 54 |
| | Google Translate | 41.9 | - | - | - | - | 57.5 | 61.9 | 59.8 | - | 45 | 61.4 | 55.1 | - | 59 | 58.6 | - | - | - | - | 62.6 | 62 | 53.7 |
| | LTRC, IIIT-H | - | - | - | - | - | 48.5 | 58.2 | 45.7 | - | - | 35.8 | 47.7 | - | - | - | - | - | - | - | 55.6 | 56.7 | 44.6 |
| | SeamlessM4T | 42.6 | 53.7 | - | - | - | 55.3 | 60.3 | 57.4 | - | 50.5 | 57.4 | 53 | - | 56.7 | 54 | 54.2 | - | 22.9 | - | 60.9 | 59.1 | 51.9 |
| flores200-dev | Llama-2-7b+lora(BI) | 28.67 | 33.84 | - | - | - | 30.91 | 48.94 | 33.87 | 13.19 | 26.58 | 30.05 | 34.64 | 1.2 | 37.17 | 28.48 | 25.7 | 22.18 | - | 0.25 | 34.21 | 32.45 | 34.35 |
| | Llama-2-7b+lora(Multi) | 31.63 | 37.1 | - | - | - | 31.2 | 44.57 | 36.59 | 17.6 | 34.64 | 32.69 | 37.58 | 3.77 | 40.28 | 32.5 | 26.24 | 23.36 | 0 | 1.83 | 34.18 | 35.06 | 35.29 |
| | Llama-2-13b+lora(BI) | 34.86 | 40.58 | - | - | - | 38.17 | 51.7 | 39.99 | 20.6 | 32.96 | 38.35 | 40.54 | 0.67 | 42.7 | 36.1 | 32.31 | 13.05 | 12.89 | 0.27 | 42.25 | 39.6 | 40.26 |
| | Llama-2-13b+lora(Multi) | 35.03 | 40.51 | - | - | - | 36.84 | 48.24 | 39.8 | 20.79 | 37.78 | 36.91 | 40.89 | 3.7 | 44.56 | 36.14 | 31.15 | 26.88 | 1.1 | 0.74 | 39.6 | 38.27 | 38.96 |
| | Llama-2-13b+FF+lora(Multi) | 42.89 | 49.4 | - | - | - | 48.5 | 55.61 | 51.66 | 32.15 | 48 | 52.69 | 50.1 | 0.29 | 54.63 | 50.1 | 47.7 | 33.88 | 32.59 | 0.44 | 55.6 | 53.11 | 49.26 |
| | Mistral-7B-v0.1+lora(Multi) | 30.41 | 35.54 | - | - | - | 31.69 | 43.29 | 33.55 | 13.76 | 31.68 | 30.7 | 36.25 | 4.28 | 38.7 | 16.57 | 22.04 | 22.58 | 0.08 | 0.6 | 31.14 | 30.11 | 31 |
| | GPT-3.5 | 24.4 | 41.4 | - | - | - | 39 | 51.1 | 41.5 | 9.7 | 33.7 | 33.9 | 35.8 | - | 43.2 | 30.8 | 38.2 | 23.4 | 0.1 | - | 36 | 36.8 | 44.2 |
| | IndicTrans-2 | 44.5 | 56.1 | - | - | - | 59 | 60.8 | 60.1 | 39.5 | 54.5 | 61.9 | 55.1 | - | 60.6 | 53.1 | 53.2 | 36.1 | 30.9 | - | 62.8 | 63.1 | 53 |
| | Google Translate | 42.1 | - | - | - | - | 58.4 | 61.1 | 60.5 | - | 45.3 | 61.7 | 54.9 | - | 59.2 | 57.6 | - | - | - | - | 61.5 | 62.6 | 51.9 |
| | LTRC, IIIT-H | - | - | - | - | - | 49.4 | 57.8 | 46.2 | - | - | 36.1 | 48.2 | - | - | - | - | - | - | - | 55.1 | 57.4 | 44.1 |
| | SeamlessM4T | 42.4 | 54 | - | - | - | 56.3 | 59.5 | 58.2 | - | 50.6 | 57.6 | 52.5 | - | 56.4 | 53.4 | 52.2 | 0 | 22.5 | 0 | 60.3 | 60.4 | 51.1 |
| flores200-devtest | Llama-2-7b+lora(BI) | 28.11 | 33.03 | - | - | - | 30.63 | 48.1 | 33.24 | 12.76 | 26.03 | 29.4 | 34.87 | 1.2 | 36.17 | 27.63 | 25.26 | 21.9 | 11.5 | 0.28 | 34 | 31.94 | 33.51 |
| | Llama-2-7b+lora(Multi) | 31.57 | 36.3 | - | - | - | 30.85 | 43.18 | 36.6 | 17.35 | 33.96 | 32.15 | 38.04 | 4.28 | 40.18 | 31.78 | 25.2 | 23.95 | 0 | 2.17 | 34.25 | 35.08 | 33.88 |
| | Llama-2-13b+lora(BI) | 33.95 | 39.61 | - | - | - | 37.96 | 50.26 | 39.55 | 19.93 | 31.87 | 37.03 | 40.25 | 0.48 | 42.64 | 35.4 | 30.93 | 12.56 | 12.79 | 0.37 | 42.11 | 39.28 | 39.85 |
| | Llama-2-13b+lora(Multi) | 35.09 | 39.93 | - | - | - | 36.8 | 47.24 | 39.35 | 19.79 | 37.03 | 35.94 | 40.49 | 3.74 | 43.99 | 35.11 | 29.35 | 27.44 | 0.85 | 0.87 | 39.13 | 38.21 | 38.9 |
| | Llama-2-13b+FF+lora(Multi) | 43.3 | 48.51 | - | - | - | 48.76 | 54.89 | 51.53 | 32.23 | 47.83 | 53.08 | 50.18 | 0.24 | 55.01 | 49.78 | 46.69 | 34.86 | 32.4 | 0.51 | 54.54 | 53.36 | 48.4 |
| | Mistral-7B-v0.1+lora(Multi) | 30.63 | 34.08 | - | - | - | 31.2 | 41.78 | 33 | 13.56 | 31.14 | 30.16 | 35.43 | 4.33 | 38.73 | 17.84 | 23.31 | 22.7 | 0.07 | 0.6 | 31.34 | 29.83 | 29.67 |
| | GPT-3.5 | - | 41.7 | - | - | - | 35.5 | 45.2 | 38 | - | - | 31.5 | 32.1 | - | - | - | 35.8 | - | - | - | 31.3 | 33.4 | 16.2 |
| | IndicTrans-2 | - | 55.7 | - | - | - | 52.4 | 54.1 | 57.3 | - | - | 53 | 51 | - | - | - | 51.1 | - | - | - | 51.3 | 49.7 | 17.6 |
| | Google Translate | - | - | - | - | - | 51.7 | 54.5 | 57.4 | - | - | 52.2 | 49.8 | - | - | - | - | - | - | - | 50.4 | 50.2 | 17.4 |
| | LTRC, IIIT-H | - | - | - | - | - | 46 | 51.9 | 39.2 | - | - | 31.8 | 42.9 | - | - | - | - | - | - | - | 45.8 | 44.3 | 16.5 |
| | SeamlessM4T | - | 54 | - | - | - | 51.3 | 53.3 | 55.7 | - | - | 49.7 | 49.1 | - | - | - | 51.5 | - | - | - | 49.9 | 48.1 | 17.5 |
| newstest2019 | Llama-2-7b+lora(BI) | - | 31.65 | - | - | - | 27.26 | 42.24 | 30.16 | - | - | 26.57 | 31.24 | - | - | - | 23.25 | - | - | - | 28.76 | 27.69 | - |
| | Llama-2-7b+lora(Multi) | - | 34.85 | - | - | - | 28.34 | 39.63 | 33.88 | - | - | 28.4 | 34.95 | - | - | - | 23.61 | - | - | - | 28.7 | 30.5 | - |
| | Llama-2-13b+lora(BI) | _ | 38.9 | - | | _ | 34.34 | 45.35 | 36.54 | - | - | 32.99 | 37.39 | - | - | - | 28.61 | - | - | - | 35.4 | 33.9 | - |
| | | | | | | | | | | | | | | | | | | | | | | | |
| | Llama-2-13b+lora(Multi) | | 38.96 | - | - | - | 33.77 | 43.21 | 36.25 | - | - | 32.51 | 37.68 | - | - | - | 27.11 | - | - | - | 33.83 | 32.9 | - |
| | | - | | - | - | - | 33.77 43.68 | 43.21 48.19 | 36.25 47.1 | - | - | 32.51 45.1 | 37.68 45.51 | - | - | - | 27.11 42.83 | - | - | - | 33.83 45.58 | 32.9 42.54 | - |

Table 6: chrF scores across Models and Benchmark-sets; English to 22 Indian Languages;

| DataSet | Model | asm | ban | bod | doi | kon | guj | hin | kan | kas | mai | mal | mar | mei | nep | odi | pun | san | sat | sin | tam | tel | urd |
|-------------------|---|---------------|------------------|--------------|------------|-------|--------|---------------|-------------|-------|--------------|-------------|--------------|------|--------------|--------------|-------|-------|------|--------------|-------|--------------|-------|
| | GPT-3.5 | 19.9 | 29.8 | 2.8 | 19.9 | 9.7 | 28.3 | 34.1 | 17.8 | 6.2 | 14 | 20.7 | 24 | 0.4 | 29.3 | 21.1 | 30.9 | 14.5 | 0.2 | 9.6 | 15.4 | 19.9 | 34.7 |
| | IndicTrans-2 | 43.9 | 36.9 | 35.3 | 45.5 | 28.9 | 40.9 | 38.7 | 25.1 | 31.8 | 35.3 | 31.3 | 37 | 32.5 | 43.1 | 38.9 | 42.8 | 25.8 | 24.2 | 26 | 22.6 | 30.8 | 46.1 |
| | Google Translate | 44.5 | 37.6 | 1.8 | 42.3 | 29.5 | 40.9 | 39.4 | 24.3 | 5.6 | 36.4 | 31.1 | 37.6 | 25.7 | 43 | 37.4 | 39.4 | 26.7 | 0 | 8.7 | 23.3 | 31.5 | 45.6 |
| | LTRC, IIIT-H | - | _ | - | - | - | - | 23.9 | 10.5 | - | - | 14.6 | 19.1 | - | _ | - | - | - | _ | - | - | 14.1 | - |
| | SeamlessM4T | 41 | 35.9 | 0 | 0 | 0 | 40.6 | 38.1 | 23 | 0 | 34 | 30.3 | 35.5 | 0.2 | 40.3 | 38.6 | 41.4 | 0 | 17.2 | 9.3 | 23.1 | 31.1 | 42.3 |
| IN22 conv | Llama-2-7b+lora(BI) | 1.17 | 2.42 | 4.04 | 9.49 | 4.43 | 3.88 | 15.72 | 1.45 | 2.17 | 3.08 | 1.7 | 7 | 0.08 | 6.22 | 1.07 | 2.29 | 4.62 | 0.03 | 3.45 | 0.81 | 0.84 | 6.33 |
| 1.122_0000 | Llama-2-7b+lora(Multi) | 12.43 | 7.71 | 8.9 | 10.16 | 6.14 | 5.09 | 7.68 | 4.25 | 4.33 | 9.79 | 3.34 | 9.91 | 1.15 | 12.36 | 6.23 | 6.55 | 5.14 | 0.26 | 3.75 | 3.47 | 5.33 | 13.75 |
| | Llama-2-13b+lora(BI) | 2.49 | 3.12 | 15.01 | 0.9 | 2.11 | 1.26 | 25.04 | 0.82 | 2.93 | 2.86 | 8.71 | 9.44 | 0.31 | 1.49 | 1.07 | 1.61 | 5.14 | 0.20 | 5.15 | 5.47 | 1.34 | 6.72 |
| | Llama-2-13b+lora(Multi) | 21.19 | 20.26 | 15.51 | 18.4 | 13.37 | 17.06 | 23.66 | 8.15 | 8.54 | 15.77 | 12.85 | 17.37 | 2.93 | 22.89 | 11.77 | 15.41 | 9.85 | 0.72 | 8.17 | 9.27 | 11.53 | 24.16 |
| | | | | | | 1.58 | 0.84 | | | 0.94 | | | | | | | 1.52 | 1.35 | | | 0.84 | 0.92 | 2.31 |
| | Llama-2-13b+FF+lora(Multi) Mistral-7B-v0.1+lora(Multi) | 2.26 12.23 | 1.77 9.19 | 1.48 8.55 | 2 11.63 | 7.46 | 2.38 | 7.05 14.81 | 0.8 3.62 | 4.69 | 1.9 12.91 | 5.99 3.5 | 2.06 11.2 | 0.48 | 2.71 17.9 | 1.55 5.51 | 1.69 | 11.03 | 0.13 | 1.81 3.84 | 3.04 | 2.4 | 18.58 |
| | GPT-3.5 | 19 | 25.2 | | | | | 30.4 | | 10 | | | 22.5 | | 27.6 | | | | | | | 20.2 | 29.2 |
| | | | | 6 | 20.8 | 13.4 | 25.6 | | 23.6 | | 19.5 | 15.8 | | 0.2 | | 18.9 | 25.6 | 14.3 | 0.2 | 13.7 | 14.4 | | |
| | IndicTrans-2 | 42.5 | 40.8 | 37.5 | 53.4 | 32.7 | 43.1 | 40 | 40 | 38.4 | 42.5 | 40.4 | 41.5 | 38.4 | 47.8 | 43.3 | 40.8 | 30.6 | 25 | 31.5 | 35.9 | 42.3 | 53.7 |
| | Google Translate | 41.9 | 39.9 | 4.3 | 44.8 | 33 | 43 | 39.2 | 41.1 | 9.7 | 39.7 | 37.9 | 40.6 | 27.4 | 46.8 | 40.3 | 39.6 | 28.5 | 0.2 | 15.7 | 34.8 | 40.9 | 51.3 |
| | LTRC, IIIT-H | - | - | - | - | - | - | 20.7 | 15.4 | - | - | 13.7 | 15.4 | - | - | - | - | - | - | - | - | 15.1 | - |
| | SeamlessM4T | 40.7 | 37.3 | 0 | 0 | 0 | 41.6 | 37.3 | 39.3 | 0 | 39.6 | 36.9 | 37.3 | 0 | 43.5 | 40.8 | 38.5 | 0 | 15.7 | 15 | 33.1 | 39.2 | 48.3 |
| IN22_gen | Llama-2-7b+lora(BI) | 2.53 | 5.99 | 8.3 | 11.99 | 7.13 | 6.13 | 18.21 | 3.62 | 4.95 | 7.41 | 5.28 | 10.72 | 0.16 | 8.81 | 2 | 4.51 | 6.82 | 0.09 | 6.97 | 4.11 | 3.18 | 12.37 |
| | Llama-2-7b+lora(Multi) | 12.01 | 9.89 | 8.79 | 14.42 | 9.61 | 5.07 | 11.38 | 8.51 | 7.64 | 14.69 | 6.39 | 11.47 | 0.77 | 16.75 | 7.71 | 6.14 | 9.36 | 0.4 | 8.1 | 5.82 | 7.36 | 16.98 |
| | Llama-2-13b+lora(BI) | 6.66 | 8.01 | 12.15 | 3.95 | 7.74 | 5.8 | 26.55 | 2.2 | 8.17 | 8.4 | 10.06 | 13.82 | 0.88 | 2.7 | 4.85 | 4.61 | - | - | - | - | 4.02 | 17.46 |
| | Llama-2-13b+lora(Multi) | 20.94 | 20.33 | 16.2 | 24.11 | 17.95 | 15.31 | 26.31 | 14.93 | 14.16 | 23.39 | 13.61 | 22.95 | 2.88 | 26.64 | 14.29 | 11.5 | 14.74 | 0.87 | 13.45 | 12.25 | 13.12 | 26.43 |
| | Llama-2-13b+FF+lora(Multi) | 1.33 | 1.78 | 1.56 | 2.17 | 1.74 | 1 | 3.61 | 0.88 | 1.12 | 1.83 | 2.56 | 2.12 | 0.22 | 2.06 | 0.89 | 1.02 | 1.06 | 0.21 | 2.41 | 1.39 | 1.04 | 1.68 |
| | Mistral-7B-v0.1+lora(Multi) | 12.36 | 10.9 | 9.31 | 16.72 | 10.94 | 2.68 | 13.88 | 7.82 | 8.38 | 16.02 | 4.49 | 14.17 | 0.69 | 16.96 | 5.5 | 3.39 | 12.33 | 0.12 | 8.19 | 6.52 | 6.17 | 20.46 |
| | GPT-3.5 | 14.8 | 25.7 | - | - | - | 24.4 | 32.8 | 22.1 | 7.9 | 19.6 | 19.3 | 21.5 | 0 | 26.2 | 18.1 | 26.5 | 11.3 | 0.4 | 0 | 15.1 | 20.3 | 27.3 |
| | IndicTrans-2 | 34.8 | 40.4 | - | - | - | 44.5 | 46.9 | 39.1 | 39 | 49 | 41.4 | 41.8 | - | 46.7 | 43.2 | 48.1 | 27 | 19.7 | - | 38.9 | 45.9 | 40 |
| | Google Translate | 34 | 40.8 | - | - | - | 45.6 | 47.7 | 39.7 | 11.5 | 48.7 | 42 | 42.5 | - | 47.4 | 43.9 | 48.3 | 25.1 | 0.2 | - | 39.3 | 46.4 | 41.8 |
| | LTRC, IIIT-H | - | - | - | - | - | - | 27.1 | 17.3 | - | - | 18.5 | 19.1 | - | - | - | - | - | - | - | - | 20.1 | - |
| | SeamlessM4T | 34.2 | 39.2 | - | - | - | 0 | 0 | 37.7 | 0 | 46.3 | 40 | 39.7 | 0 | 44.5 | 41.2 | 45.8 | 0 | 19.7 | 0 | 37.5 | 43.6 | 39.8 |
| flores200-dev | Llama-2-7b+lora(BI) | 1.88 | 5.57 | _ | - | _ | 5.57 | 17.98 | 3.37 | 4.82 | 6.97 | 5.77 | 10.82 | 1.36 | 8.41 | 2.24 | 5.61 | 6.73 | 0.17 | 2.32 | 2.97 | 2.87 | 9.35 |
| J | Llama-2-7b+lora(Multi) | 11.7 | 10.84 | | - | _ | 4.65 | 8.16 | 8.67 | 6.92 | 14.84 | 7.84 | 11.67 | 3.23 | 14.63 | 7.78 | 6.61 | 6.67 | 0.48 | 1.45 | 6.13 | 8.34 | 13 |
| | Llama-2-13b+lora(BI) | 4.83 | 9.12 | | | | 4.74 | 30.09 | 2.53 | 7.01 | 8.56 | 10.55 | 14.6 | 2.64 | 2.38 | 4.32 | 3.35 | - | | | 4 | 9.3 | |
| | Llama-2-13b+lora(Multi) | 18.4 | 22.13 | _ | _ | _ | 15.47 | 29.09 | 14.67 | 12.48 | 24.99 | 15.75 | 22.2 | 5.65 | 24.27 | 14.71 | 17.31 | 12.36 | 0.94 | 4.51 | 14.7 | 15.39 | 22.23 |
| | Llama-2-13b+FF+lora(Multi) | 1.34 | 22.13 | - | | - | 0.87 | 3.35 | 1.31 | 0.8 | 1.71 | 1.78 | 2.2 | 1.15 | 1.71 | 1.07 | 0.86 | 1.17 | 0.18 | 0.84 | 1.29 | 1.31 | 22.23 |
| | Mistral-7B-v0.1+lora(Multi) | 11.31 | 11.4 | | | | 3.24 | 13.02 | 7.79 | 7.1 | 17.98 | 6 | 15.07 | 3.63 | 17.88 | 5.23 | 2.7 | 9.56 | 0.22 | 3.09 | 6.31 | 5.76 | 15.35 |
| | GPT-3.5 | 14.5 | 24.1 | _ | _ | _ | 23.6 | 32.5 | 20.8 | 8.2 | 18 | 18.5 | 21.6 | 0 | 24.8 | 16.2 | 24.4 | 11.1 | 0.4 | 5.07 | 14.2 | 16.7 | 25.4 |
| | IndicTrans-2 | 33.1 | 39.3 | | | - | 45.2 | 46.1 | 37.7 | 36.2 | 48.3 | 41 | 41.5 | - | 46.3 | 42.6 | 44.7 | 26.8 | 18.1 | | 37.8 | 44.8 | 38.1 |
| | Google Translate | 32.8 | 39.8 | | | | 46.2 | 46.1 | 38 | 10.7 | 46.6 | 40.9 | 42.1 | | 46.3 | 41.3 | 45.9 | 25.2 | 0.1 | | 37.7 | 44.9 | 40.1 |
| | LTRC, IIIT-H | 52.0 | | | | | - 40.2 | 27.6 | 16.7 | - | | 17.9 | 18.2 | - | - | | - | | 0.1 | | | 19.2 | |
| | SeamlessM4T | 32.3 | 38.3 | - | - | - | - | 27.0 | 36 | - | 44.3 | 39.7 | 38.8 | - | 43.4 | 40.2 | 43.2 | 0 | 18.3 | 0 | 35.2 | 42.9 | 38.1 |
| flores200-devtest | Llama-2-7b+lora(BI) | 1.64 | 5.51 | - | - | - | 5.78 | 16.88 | 2.91 | 4.28 | 7.45 | 5.76 | 10.24 | 1.18 | 8.56 | 2.11 | 5.48 | 6.75 | 0.1 | 2.22 | 2.46 | 3.02 | 8.37 |
| jiores200-aeviesi | | 10.85 | 10.45 | - | - | - | 4.55 | 8.1 | 8.34 | 6.76 | 14.02 | 6.39 | 11.26 | 2.66 | 15.03 | 7.02 | 5.9 | | 0.1 | 1.66 | 5.94 | | 13.94 |
| | Llama-2-7b+lora(Multi) | | | - | - | - | | 30.38 | 2.57 | | | | | | | 3.36 | | 6.82 | 0.55 | 1.00 | | 7.53 8.98 | 13.94 |
| | Llama-2-13b+lora(BI) | 4.29 | 8.76 | - | - | - | 4.15 | | | 5.94 | 7.49 | 10.07 | 14.12 | 2.12 | 2.51 | | 3.48 | - | - | | 3.66 | | - |
| | Llama-2-13b+lora(Multi) | 17.64 | 20.59 | - | - | - | 15.49 | 28.6 | 13.86 | 11.17 | 23.6 | 14.97 | 21.84 | 5.38 | 23.58 | 13.13 | 15.22 | 11.85 | 0.94 | 4.51 | 12.73 | 15.29 | 21.33 |
| | Llama-2-13b+FF+lora(Multi) | 1.12 | 1.42 | - | - | - | 0.75 | 2.67 | 0.95 | 0.88 | 1.53 | 1.7 | 1.73 | 0.92 | 1.38 | 0.9 | 0.97 | 0.81 | 0.15 | 0.78 | 1.26 | 1.16 | 1.27 |
| | Mistral-7B-v0.1+lora(Multi) | 10.21 | 10.86 | - | - | - | 3.22 | 12.62 | 7.3 | 7.29 | 15.45 | 5.2 | 14.16 | 3.71 | 15.91 | 5.8 | 2.66 | 11.08 | 0.33 | 3.31 | 5.82 | 6.15 | 13.87 |
| | GPT-3.5 | - | 20 | - | - | - | 19.2 | 24.1 | 16 | - | - | 11.6 | 14.8 | - | - | - | 18.7 | - | - | - | 9.9 | 12.6 | 2.3 |
| | IndicTrans-2 | - | 38.8 | - | - | - | 42.5 | 37.7 | 36.5 | - | - | 32.1 | 37 | - | - | - | 40.5 | - | - | - | 31.3 | 29.9 | 3.1 |
| | Google Translate | - | 38.5 | - | - | - | 42.6 | - | 36.6 | - | - | 34 | 37.7 | - | - | - | - | - | - | - | 31.8 | 30.5 | 4.3 |
| | LTRC, IIIT-H | - | - | - | - | - | - | 12.7 | 13.4 | - | - | 13.8 | 15.7 | - | - | - | - | - | - | - | - | 9.4 | - |
| | SeamlessM4T | - | 35.3 | - | - | - | 39.6 | 35.3 | 33.8 | - | - | 30 | 33.4 | - | - | - | 37.6 | - | - | - | 29.4 | 27.9 | 3.8 |
| newstest2019 | Llama-2-7b+lora(BI) | - | 5.14 | - | - | - | 4.14 | 12.5 | 2.51 | - | - | 4.55 | 8.97 | - | - | - | 4.12 | - | - | - | 2.32 | 2.57 | 0.86 |
| | Llama-2-7b+lora(Multi) | - | 8.57 | - | - | - | 3.92 | 11.9 | 5.32 | - | - | 4.77 | 10.57 | | - | - | 5.08 | - | | - | 4.2 | 5.07 | 1.25 |
| | Llama-2-13b+lora(BI) | - | 10.78 | - | - | - | 5.29 | 23.88 | 1.86 | - | - | 9.08 | 12.95 | | - | - | 2.7 | - | - | - | - | 2.48 | 1.31 |
| | Llama-2-13b+lora(Multi) | - | 18.27 | _ | - | - | 12.4 | 24.46 | 10.42 | - | - | 9.91 | 18.52 | | - | _ | 10.79 | - | | - | 8.91 | 9.83 | 2.06 |
| | Llama-2-13b+FF+lora(Multi) | _ | 1.15 | _ | _ | _ | 0.69 | 2.42 | 0.9 | _ | _ | 1.29 | 1.46 | | _ | | 0.88 | _ | | _ | 0.99 | 0.88 | 0.16 |
| | Mistral-7B-v0.1+lora(Multi) | _ | 9.84 | _ | _ | _ | 2.8 | 11.84 | 6.19 | _ | _ | 3.77 | 11.38 | | _ | _ | 1.74 | _ | | _ | 4.3 | 4.21 | 1.61 |
| | | - | J.0 4 | | - | - | 2.0 | 11.04 | 0.17 | - | | 5.11 | 11.50 | - | | - | 1./- | - | - | | 4.5 | 7.21 | 1.01 |

Table 7: BLEU scores across Models and Benchmark-sets; 22 Indian Languages to English;

| DataSet | Model | asm | ban | bod | doi | kon | guj | hin | kan | kas | mai | mal | mar | mei | nep | odi | pun | san | sat | sin | tam | tel | urd |
|-------------------|---|---------------|----------------|-------|-------|-------|----------------|---------------|----------------|-------|----------------|----------------|----------------|---------------|---------------|---------------|----------------|---------|----------------|----------------|----------------|----------------|----------------|
| | GPT-3.5 | 44.80 | 54.30 | 21.10 | 45.50 | 32.80 | 52.60 | 58.80 | 45.10 | 28.70 | 42.10 | 46.00 | 50.30 | 14.50 | 53.80 | 47.60 | 54.80 | 40.60 | 14.80 | 34.70 | 39.90 | 44.10 | 59.00 |
| | IndicTrans-2 | 63.90 | 59.80 | 57.20 | 66.00 | 52.60 | 63.20 | 60.90 | 49.20 | 53.50 | 59.20 | 55.40 | 60.10 | 53.90 | 64.40 | 61.60 | 63.40 | 49.60 | 45.10 | 50.60 | 47.40 | 54.20 | 66.60 |
| | Google Translate | 64.70 | 60.80 | 16.40 | 63.70 | 52.80 | 63.20 | 61.80 | 49.70 | 23.20 | 60.00 | 56.10 | 60.50 | 47.20 | 64.90 | 60.1 | 62.70 | 50.30 | 0.30 | 32.80 | 48.50 | 55.20 | 66.30 |
| | LTRC, IIIT-H | - | - | - | - | - | - | 52.20 | 34.80 | - | - | 40.70 | 47.30 | - | - | - | - | - | - | - | - | 39.00 | - |
| | SeamlessM4T | 61.30 | 59.00 | - | - | - | 62.70 | 60.50 | 47.90 | - | 57.60 | 54.90 | 58.70 | 2.90 | 62.10 | 61.10 | 62.60 | - | 37.20 | 32.00 | 47.80 | 53.90 | 63.90 |
| IN22_conv | Llama-2-7b+lora(BI) | 1.49 | 4.57 | 8.27 | 24.13 | 16.23 | 9.36 | 31.77 | 4.18 | 15.60 | 7.80 | 4.99 | 15.83 | 1.20 | 12.66 | 2.94 | 5.45 | 13.11 | 0.29 | 20.31 | 2.24 | 2.45 | 16.30 |
| | Llama-2-7b+lora(Multi) | 26.69 | 17.30 | 21.90 | 23.50 | 16.78 | 10.84 | 14.04 | 14.27 | 16.95 | 23.63 | 11.05 | 21.46 | 8.80 | 24.88 | 16.87 | 12.50 | 18.37 | 8.69 | 13.81 | 12.11 | 16.00 | 28.71 |
| | Llama-2-13b+lora(BI) | 3.68 | 6.67 | 31.75 | 1.40 | 5.09 | 2.39 | 49.08 | 1.83 | 13.63 | 6.69 | 14.04 | 17.65 | 7.43 | 1.84 | 2.45 | 4.45 | - | - | - | - | 3.09 | 14.48 |
| | Llama-2-13b+lora(Multi) | 45.43 | 45.25 | 38.80 | 43.00 | 36.80 | 40.06 | 49.77 | 29.89 | 30.14 | 43.16 | 34.75 | 40.99 | 16.45 | 47.50 | 34.71 | 37.11 | 33.03 | 14.11 | 31.95 | 31.89 | 33.15 | 49.70 |
| | Llama-2-13b+FF+lora(Multi) | 19.76 | 19.98 | 18.74 | 18.95 | 18.68 | 17.04 | 24.57 | 15.70 | 16.53 | 19.70 | 17.63 | 19.36 | 15.68 | 20.79 | 17.26 | 16.71 | 17.49 | 12.69 | 18.59 | 17.60 | 16.33 | 20.8 |
| | Mistral-7B-v0.1+lora(Multi) | 27.16 | 17.34 | 25.40 | 28.29 | 21.90 | 3.70 | 27.60 | 8.48 | 22.19 | 30.57 | 8.24 | 25.55 | 8.30 | 32.84 | 12.60 | 3.49 | 25.06 | 4.19 | 14.88 | 8.47 | 6.49 | 37.17 |
| | 49.10 | 54.40 | 27.70 | 50.70 | 41.90 | 54.00 | 59.80 | 54.20 | 38.50 | 51.50 | 48.70 | 52.80 | 16.20 | 56.80 | 50.50 | 54.00 | 46.90 | 19.50 | 42.70 | 44.00 | 49.10 | 59.50 | |
| | IndicTrans-2 | 68.00 | 66.40 | 62.60 | 74.10 | 60.20 | 68.40 | 66.70 | 66.30 | 62.20 | 67.90 | 66.10 | 66.70 | 61.60 | 71.00 | 68.60 | 64.90 | 57.10 | 49.40 | 57.70 | 62.00 | 66.70 | 74.60 |
| | Google Translate | 67.10 | 66.30 | 21.70 | 69.00 | 60.00 | 68.50 | 67.20 | 66.70 | 32.70 | 66.20 | 65.10 | 66.50 | 52.70 | 70.70 | 66.40 | 64.80 | 56.00 | 00.30 | 42.80 | 61.90 | 66.40 | 73.80 |
| | LTRC, IIIT-H | - | - | - | - | - | - | 54.40 | 44.30 | - | - | 42.70 | 47.10 | - | - | - | - | - | - | - | - | 43.90 | - |
| | SeamlessM4T | 65,60 | 63.80 | | _ | _ | 66.80 | 64.90 | 64.70 | _ | 65.30 | 63.80 | 63.60 | 1.40 | 67.80 | 66.00 | 63.10 | - | 39.60 | 38.60 | 60.00 | 64.50 | 71.10 |
| IN22 gen | Llama-2-7b+lora(BI) | 4.77 | 12.80 | 23.56 | 30.80 | 22.03 | 18.59 | 35.50 | 9.40 | 24.24 | 19.09 | 15.89 | 24.88 | 5.40 | 18.53 | 6.74 | 15.03 | 21.20 | 00.46 | 24.61 | 9.55 | 7.15 | 29.47 |
| | Llama-2-7b+lora(Multi) | 33.38 | 25.50 | 30.40 | 35.91 | 28.11 | 17.70 | 23.86 | 28.24 | 29.00 | 36.17 | 22.40 | 28.40 | 15.67 | 37.65 | 26.45 | 21.11 | 30.45 | 9.97 | 25.74 | 21.48 | 25.37 | 41.56 |
| | Llama-2-13b+lora(BI) | 13.08 | 15.90 | 24.09 | 6.2 | 15.07 | 12.06 | 52.08 | 4.49 | 22.17 | 16.95 | 24.00 | 26.70 | 13.80 | 4.29 | 11.64 | 10.76 | - | - | - | - | 8.21 | 33.71 |
| | Llama-2-13b+lora(Multi) | 45.95 | 45.74 | 41.47 | 49.39 | 42.73 | 36.27 | 54.26 | 38.06 | 38.01 | 49.69 | 37.81 | 49.00 | 18.81 | 53.03 | 38.26 | 33.04 | 39.50 | 14.29 | 38.00 | 36.95 | 36.30 | 53.29 |
| | Llama-2-13b+FF+lora(Multi) | 16.70 | 17.10 | 16.83 | 17.88 | 16.76 | 14.98 | 20.50 | 15.31 | 15.95 | 17.38 | 16.60 | 17.81 | 13.40 | 17.78 | 14.66 | 15.05 | 15.84 | 12.46 | 17.68 | 16.61 | 14.87 | 17.45 |
| | Mistral-7B-v0.1+lora(Multi) | 26.80 | 23.09 | 30.43 | 35.65 | 28.46 | 5.60 | 28.00 | 16.30 | 29.10 | 35.29 | 13.18 | 30.96 | 13.76 | 34.00 | 14.30 | 6.18 | 32.03 | 2.44 | 21.60 | 16.04 | 13.30 | 41.19 |
| | GPT-3.5 | 44.50 | 55.10 | | | | 53.50 | 61.50 | 52.30 | 37.40 | 52.00 | 50.50 | 51.70 | 00.00 | 55.80 | 48.90 | 56.20 | 43.00 | 19.20 | | 44.00 | 49.50 | 57.40 |
| | IndicTrans-2 | 60.70 | 65.60 | - | - | - | 68.20 | 69.80 | 64.50 | 63.90 | 72.00 | 66.10 | 66.30 | 00.00 | 70.40 | 67.80 | 70.40 | 54.00 | 43.90 | - | 64.00 | 68.90 | 65.30 |
| | Google Translate | 60.40 | 66.00 | - | - | - | 69.00 | 70.70 | 64.80 | 37.90 | 72.00 | 66.70 | 67.00 | - | 70.40 | 67.90 | 70.40 | 53.60 | 00.30 | - | 64.60 | 69.30 | 66.80 |
| | LTRC. IIIT-H | 00.40 | 00.00 | - | - | - | 09.00 | 58.30 | 47.60 | 37.90 | 72.00 | 48.60 | 51.10 | - | /0.90 | 67.90 | 70.50 | 33.00 | 00.30 | - | 04.00 | 50.30 | 00.00 |
| | SeamlessM4T | 59.80 | 64.50 | - | - | - | - | 36.30 | 63.40 | - | 69.90 | 65.00 | 65.10 | - | 68.70 | 66.20 | 68.80 | | 44.20 | - | 62.80 | 67.30 | 64.90 |
| flores200-dev | Llama-2-7b+lora(BI) | 3.86 | 13.27 | - | - | - | 18.55 | 33.91 | 9.56 | 24.35 | 18.38 | 17.20 | 25.13 | 3.86 | 19.77 | 7.23 | 21.16 | 24.11 | 0.45 | 17.26 | 6.68 | 7.54 | 25.05 |
| jiores200-aev | Llama-2-7b+lora(Multi) | 32,47 | 27.27 | - | - | - | 16.34 | 17.14 | 28.70 | 28.41 | 36.03 | 24.85 | 28.90 | 20.18 | 35.44 | 27.29 | 21.59 | 27.56 | 12.37 | 14.71 | 20.9 | 26.70 | 34.75 |
| | Llama-2-13b+lora(BI) | 10.94 | 19.00 | - | - | - | 10.54 | 53.87 | 5.00 | 20.58 | 17.03 | 25.83 | 28.57 | 9.73 | 4.21 | 10.39 | 8.63 | 27.30 | 12.37 | 14.71 | 20.9 | 7.70 | 21.78 |
| | Llama-2-13b+lora(Multi) | 43.69 | 47.68 | | - | - | 37.91 | 56.27 | 38.65 | 36.59 | 51.53 | 39.66 | 47.90 | 26.15 | 50.98 | 38.57 | 41.27 | 37.78 | 15.88 | 25.85 | 39.00 | 39.83 | 49.76 |
| | Llama-2-13b+FF+lora(Multi) | 18.77 | | | | | 17.44 | 21.33 | 17.45 | 17.23 | 19.26 | 17.04 | 19.97 | 18.10 | 19.00 | 16.73 | 16.43 | 17.73 | 14.26 | 16.26 | 18.31 | 17.40 | |
| | Mistral-7B-v0.1+lora(Multi) | 27.96 | 25.19 | | | | 6.97 | 27.01 | 19.06 | 28.60 | 38.69 | 17.34 | 35.26 | 19.00 | 38.19 | 15.10 | 6.03 | 29.75 | 2.85 | 19.23 | 16.91 | 13.80 | 37.69 |
| | | | | | | | | | | | | | | | | | | | | 17.23 | | | |
| | GPT-3.5 | 43.90 | 54.10 | - | - | - | 52.90 | 60.90 | 51.40 | 37.70 | 51.20 | 50.10 | 51.90 | 00.00 | 54.80 | 47.10 | 54.20 | 43.00 | 19.10 | - | 43.20 | 46.90 | 55.60 |
| | IndicTrans-2 | 59.40 | 64.80 | - | - | - | 68.80 | 69.10 | 63.40 | 61.80 | 71.30 | 66.20 | 66.60 | - | 69.90 | 66.80 | 67.90 | 54.00 | 42.30 | - | 63.20 | 68.00 | 64.10 |
| | Google Translate | 59.80 | 65.30 | - | - | - | 69.70 | 69.70 | 63.90 | 37.20 | 70.50 | 66.40 | 67.20 | - | 70.50 | 65.90 | 68.70 | 53.80 | 00.30 | - | 63.60 | 68.50 | 65.60 |
| | LTRC, IIIT-H | - | - | - | - | - | - | 58.40 | 47.00 | - | - | 48.20 | 50.90 | - | - | - | - | - | - | - | - | 49.40 | |
| a 200 I | SeamlessM4T | 58.30 | 63.80 | - | - | - | 17.54 | 21.07 | 62.50 | 22.06 | 68.50 | 65.20 | 65.00 | 03.57 | 68.20 | 65.00 | 67.00 | - 22.64 | 42.40 | 17.70 | 61.40 | 66.90 | 63.90 |
| flores200-devtest | Llama-2-7b+lora(BI) | 3.96 30.6 | 12.63 26.28 | - | - | - | 17.54 | 31.87 | 7.95 28.86 | 23.86 | 19.30 35.87 | 17.85 24.17 | 25.35 28.17 | 20.11 | 19.97 36.6 | 07.09 26.4 | 21.16 | 23.64 | 0.46 11.38 | 17.78 14 | 05.69 21.27 | 07.17 25.53 | 21.69 36 |
| | Llama-2-7b+lora(Multi) | | 18.36 | - | - | - | 16.24 9.38 | 16.2 53.3 | 4.93 | 19.71 | 15.73 | 25.7 | 28.17 | | 3.88 | 9.74 | 8.59 | 27.3 | 11.38 | 14 | 21.27 | 7.07 | 20.7 |
| | Llama-2-13b+lora(BI) | 9.87 42.67 | | - | - | - | | 55.44 | | 35.4 | 51.23 | 39.66 | 48.08 | 8.94 25.77 | 50.25 | 37.08 | | 37.93 | 15.02 | 25.50 | 37.28 | 39.18 | |
| | Llama-2-13b+lora(Multi) Llama-2-13b+FF+lora(Multi) | 17.96 | 45.51 19.29 | - | - | - | 36.97 16.86 | 20.13 | 38.15 16.95 | 17.08 | 19.06 | 16.71 | 19.33 | 17.84 | 18.45 | 16.27 | 39.84 16.09 | 17.2 | 15.83 13.71 | 25.78 15.83 | 17.98 | 16.68 | 48.76 18.23 |
| | Mistral-7B-v0.1+lora(Multi) | 25.7 | 23.29 | - | - | - | 6.03 | 25.07 | 17.79 | 28.05 | 35.57 | 15.76 | 33.4 | 19.29 | 36.31 | 15.47 | 5.54 | 29.95 | 2.91 | 19.26 | 14.98 | 14.18 | 35.23 |
| | | 23.1 | | - | - | - | | | | 28.03 | 33.37 | 13.70 | | 19.29 | 30.31 | 13.47 | | 29.93 | 2.91 | 19.20 | | | |
| | GPT-3.5 | - | 51.8 | - | - | - | 50.7 | 56.7 | 48.1 | - | | 45.1 | 48 | - | - | - | 50.8 | - | - | - | 40 | 43 | 19.4 |
| | IndicTrans-2 | - | 64.5 | - | - | - | 67.7 | 64.6 | 62.4 | - | - | 61.1 | 63.9 | - | - | - | 65.8 | - | - | - | 58.3 | 56.8 | 19 |
| | Google Translate | - | 64.5 | - | - | - | 67.8 | - | 62.7 | - | - | 61.6 | 64.1 | - | - | - | - | - | - | - | 58.7 | 57.3 | 19.6 |
| | LTRC, IIIT-H | - | - | - | - | - | - | 47.9 | 44.7 | - | - | 44 | 48.9 | - | - | - | - | - | - | - | - | 38.8 | - |
| | SeamlessM4T | - | 62.3 | - | - | - | 65.8 | 63.4 | 60.5 | - | - | 59.3 | 61.8 | - | - | - | 63.9 | - | - | - | 56.9 | 55.5 | 19.4 |
| newstest2019 | Llama-2-7b+lora(BI) | - | 13.28 | - | - | - | 17.13 | 27.87 | 9.74 | - | - | 17.53 | 25.14 | - | - | - | 18.37 | - | - | - | 7.01 | 8.35 | 8.24 |
| | Llama-2-7b+lora(Multi) | - | 26.65 | - | - | - | 16.53 | 27.36 | 25.11 | - | - | 22.56 | 30.49 | - | - | - | 20.14 | - | - | - | 19.64 | 22.55 | 14.88 |
| | Llama-2-13b+lora(BI) | - | 25.58 | - | - | - | 14.2 | 50.06 | 4.56 | - | - | 26.76 | 29.23 | - | - | - | 8.58 | - | - | - | - | 6.08 | 10.67 |
| | Llama-2-13b+lora(Multi) | - | 43.9 | - | - | - | 34.31 | 52.21 | 34.5 | - | - | 34.56 | 44.86 | - | - | - | 34.35 | - | - | - | 33.24 | 32.65 | 17.51 |
| | | | 17 11 | | | | 15 22 | 10.4 | 155 | | | | 16.98 | | | | 15.05 | | | | 16.48 | 15 | 13.28 |
| | Llama-2-13b+FF+lora(Multi) Mistral-7B-v0.1+lora(Multi) | - | 17.11 24.9 | - | - | - | 15.23 | 18.4 26.04 | 15.5 18.47 | - | - | 15.49 14.09 | 30.3 | - | - | - | 4.6 | - | - | - | 13.91 | 13.1 | 14.03 |

Table 8: chrF scores across Models and Benchmark-sets; 22 Indian Languages to English;