Connecting Neural Response measurements & Computational Models of language: a non-comprehensive guide

Mostafa Abdou

University of Copenhagen abdou@di.ku.dk

Abstract

Understanding the neural basis of language comprehension in the brain has been a long-standing goal of various scientific research programs. Recent advances in language modelling and in neuroimaging methodology promise potential improvements in both the investigation of language's neurobiology and in the building of better and more human-like language models. This survey traces a line from early research linking Event Related Potentials and complexity measures derived from simple language models to contemporary studies employing Artificial Neural Network models trained on large corpora in combination with neural response recordings from multiple modalities using naturalistic stimuli.

1 Introduction

The mechanisms which underlie language comprehension in humans have been the object of study of a broad range of scientific research programs. Early work in theoretical and psycho-linguistics hypothesized certain mechanisms and structures underlying language processing, often employing behavioural data to confirm or refute them (Taylor, 1953; Chomsky, 2009, 2014a,b; Greenberg, 1963; Katz and Fodor, 1963; Fodor and Garrett, 1966; Lenneberg, 1967; Geschwind, 1970; Lakoff and Johnson, 2008; Fodor, 1983; McClelland et al., 1986; Prince and Smolensky, 2008; Luce and Pisoni, 1998; Rayner, 1998), inter alia. With the advancement of neuroimaging technologies, it became possible to begin to localise some of the computations responsible for language in the brain — both in time and space — investigating a) the timeline of such computations and b) the brain regions (or networks) which carry them out.

Orthogonally, advances in the field of artificial intelligence have enabled the training and deployment of large artificial neural network models (ANNs). These models, which are loosely-based on upon the structure of biological brains (Haykin, 1994), have demonstrated remarkable adeptness at a wide variety of tasks (Bengio, 2009; Krizhevsky et al., 2012; Graves et al., 2013; Schmidhuber, 2015; Silver et al., 2016; Goodfellow et al., 2016). In the field of natural language processing (NLP), ANNs have all but replaced other types of statistical methods previously employed, showing far superior performance on an assortment of natural language understanding tasks (Devlin et al., 2018; Radford et al., 2019; Brown et al., 2020).

Although they fundamentally differ from the neural architecture of the human brain, the success of these models in approximating human behaviour on tasks such as object recognition and speech recognition and in various language understanding tasks led to the suggestion that they could be adopted as potential models of the representations and structures which underpin human cognition. In seminal work, researchers found that convolutional neural networks (LeCun et al., 1995) trained

on large image classification datasets could predict image-evoked neural activations in the ventral visual stream with a higher accuracy than all previous models — even those directly optimised to fit neural activations (Yamins et al., 2014; Yamins and DiCarlo, 2016). Similar research followed for a variety of perceptual domains, showing that ANNs exhibit similarities to both human behaviour and neural responses and that those similarities arise simply as a consequence of learning to perform a task such as image classification (Kriegeskorte, 2015; Eickenberg et al., 2017; Kell et al., 2018). Analogously, for language, ANN models trained to predict future or masked words from context have recently been found to show considerable representational alignment to neural response the human brain (Caucheteux and King, 2020; Schrimpf et al., 2020b; Goldstein et al., 2021).

Scope This paper makes a survey of research which links computational models of and neural responses to language. Particular attention is given to more recent work which makes use of ANNs, with the goal of tracing a line between this trend and previous work leveraging simpler computational models such as syntactic parsing models or context-free grammars. Studies which combine those, or any type of computational model, with neuroimaging data are considered to be within the scope of the survey, while those e.g. primarily focusing on the stimuli themselves are not. For other relevant surveys with different foci, readers are referred to Murphy et al. (2018) and Hale et al. (2021).

Overview The rest of this paper is structured as follows: Section 2 outlines a set of preliminaries, establishing terminology that will be used throughout the paper; Section 3 offers historical context; Section 4 describes early work which focused on representations of and neural responses to words, treated as isolated units; Section 5 surveys research that employs computational models in investigations of syntactic structure in the brain; Section 6 moves forward to studies which apply more complex analyses that account for multiple levels of perceptual and linguistic abstraction; Section 7 looks at work that applies large-scale "integrative benchmarking" to establish patterns of performance across many language models and neural response datasets; Section 8 presents recent work on using language models to apply controls at the computational level rather than at the level of stimuli; Section 9 shifts to work that aims to evaluate and improve language models using insights and data from neurolinguistics, and finally, Section 10 presents a discussion and outlook.

2 Preliminaries

Language Models We take "language model" to mean any computational model that aims to explain and make predictions about some aspect of language. This includes early models of syntactic structure (Chomsky, 1956; Pollard and Sag, 1988; Bresnan et al., 2015), lexical distributional models (Schütze, 1993; Mikolov et al., 2013; Pennington et al., 2014), and more recent ANN models (Hochreiter and Schmidhuber, 1997; Vaswani et al., 2017).

Neuroimaging methods Work surveyed in this paper makes use of the following neuroimaging modalities:

- Electroencephalogram (EEG) involves recording the electrical activity occurring in the cortex over a period of time using multiple electrodes placed on the scalp (Henry, 2006). EEG is generally considered to have a high temporal but a relatively poor spatial resolution (centimeters) and is often used for deriving event-related potentials (ERPs) which average over the EEG signals resulting from of a specific event, e.g. reading a word (Luck, 2014).
- Magnetoencephalography (MEG) involves measurement of the magnetic field generated by the electrical activity of neurons in the cortex. Like EEG, MEG offers an accurate resolution of the timing of neuronal activity. Unlike EEG, it also offers a relatively good spatial resolution (millimeters) (Baars and Gage, 2013).
- Functional Magnetic Resonance Imaging (fMRI) measures neuronal activity in the brain via blood oxygenation level-dependent (BOLD) contrast. fMRI offers high spatial resolution and signal reliability, but poor temporal resolution (3 to 6 seconds) due to slow nature of the hemodynamic response (Soares et al., 2016).
- Electrocorticography (ECoG) records electrical activity in the brain through electrodes placed in direct contact with the surface of the brain (Baars and Gage, 2013). ECoG data has a fine spatial and temporal resolution and a high signal-to-noise ratio. As the procedure is invasive, however, ECoG data can only be gathered as part of a clinical procedure.




Figure 1: Major language relevant gyri and Brodmann areas in the Left Hemisphere. Figure from Friederici (2011).

The language network A range of brain regions — often refered to as regions of interest (ROIs) — in the left and right hemisphere have been implicated in facilitating language. Although there is no consensus on the exact functional neuroanatomy, the network is known to, broadly speaking, include parts of the inferior frontal, the superior temporal, and the middle temporal gyra in the frontal and temporal lobes as well as the inferior parietal and angular gyrus in the parietal lobe (Friederici, 2011) — see Figure 1. For more details see Friederici and Gierhan (2013); Poeppel (2014); Fedorenko and Thompson-Schill (2014); Blank et al. (2016); Pylkkänen (2019, 2020); Fedorenko et al. (2020).

Linking hypotheses To relate the computational and neural recording paradigms, a linking hypothesis is assumed — a commonly employed hypothesis, for instance, is that brain activation magnitude should correspond to measures of processing difficulty or complexity derived from the stimuli. Another common linking hypothesis is that of linear mapping, where a linear model is trained to map between e.g. features extracted from a computational model and neural recordings of a set of stimuli, under the assumption that a linear transformation should suffice to model the relationship between the two spaces. Goodness of fit or predictive accuracy are used to evaluate correspondence between the two.

3 Background

Investigations into the neural basis of language processing aim to characterize the processes which occur once an utterance is perceived that enable a listener to arrive at a contextualised meaning from the sensory input she perceives. Such investigations date back at least to Broca et al. (1861) and Wernicke (1874)'s description of two brain regions linked to the language faculty¹. In the 1970s, the introduction of non-invasive brain-monitoring techniques allowed scientists to characterize activity in the brain using methods such as EEG and MEG. Using these methods, researchers initially identified Event-related potential components such as N400, P600, and ELAN² which corresponded to levels of syntactic or semantic processing (Kutas and Hillyard, 1980, 1984; Hagoort et al., 1993; Friederici et al., 1993).

¹Although the term is still commonly employed, it is now understood that Broca's area 'is not a natural kind' and instead consists of consists of multiple functionally distinct components (Fedorenko and Blank, 2020) only part of which are directly linked to language.

²N400, related to semantic processing, is a negative-going potential, which peaks around 400ms after stimulus onset; P600, associated with syntactic processing, is positive-going potential peaking around 600ms after stimulus onset. ELAN is an early left anterior negativity, characterized by a negative-going wave that peaks around 200 ms or less after onset.

While these early studies were successful at identifying particular patterns of activation which occurred during linguistic processing, they did not offer computational models which could make directly testable predictions of activation patterns. Mitchell et al. (2008) did this, demonstrating that word representations based on co-occurrence statistics could in fact be used to predict the activations associated with concrete nouns as measured via fMRI recordings. To accomplish this, they encode each stimulus word as a vector of semantic features computed from the its occurrences in a large text corpus. An linear encoding model is then trained to predicts fMRI activation per voxel in the brain, as a weighted sum of the semantic features. Evaluation was carried out through "leave-two-out" cross-validation, in which a model is repeatedly trained while holding out two word stimuli from the full set, then tested on whether its predicted fMRI image for these two stimuli can select the correct one via cosine similarity.

4 The Meanings of Words and Phrases

Following a setup similar to Mitchell et al. (2008): Murphy et al. (2009) applied the same methodology using EEG instead of fMRI; Devereux et al. (2010) used four automatic feature extraction methods leveraging different sources of information from corpora; Pereira et al. (2013) employed lowdimensional representations constructed by applying topic modelling to a small wikipedia corpus, showing that this feature space can outperform the one used by Mitchell et al. (2008) in a classification task based on decoding the values of semantic features present in concepts from the fMRI data; Palatucci et al. (2009) also reversed the original task, decoding word representations based on both co-occurance statistics and human annotations from their corresponding fMRI recordings in a zeroshot setting; Sudre et al. (2012) studied the temporal sequence of language processing, showing that perceptual and semantic features could be decoded at different times from MEG data; Anderson et al. (2013) used image-based distributional semantic representations of concepts instead of text-based ones; Anderson et al. (2017) built on this, showing that although both perform equally well for concrete concepts, text-based word representations better predict the brain activations of abstract concepts compared to visually-grounded ones; Bulat et al. (2017) employed multiple evaluation methods to carry out a systematic appraisal of how well a wide range of text-based and grounded semantic models — including more recent skip-gram and bag-of-words word embeddings (Mikolov et al., 2013) — can predict fMRI measuremets; Pereira et al. (2018) presented a new fMRI dataset of subjects reading words and passages, showing that a decoder trained to predict word embeddings from imaging data for individual concepts that were selected using a novel sampling procedure designed to cover the entire semantic space, can generalize to new concepts and can, further, decode sentence stimuli represented as a simple average of (content) word embeddings; finally, Abnar et al. (2017) evaluate eight types of word embeddings on how well they predict the fMRI activation recordings from Mitchell et al. (2008), finding that a word embedding method which incorporates syntactic information fares best compared to multiple other word representations base on the skip-gram approach, matrix factorization, or crowd-sourced association features.

In a notable critique, Bullinaria and Levy (2013) present evidence that it is the lack of representational distinctiveness of the fMRI voxel activation vectors that is the major limiting factor in the kind of work described above. Gauthier and Ivanova (2018) take aim at the evaluation methods employed in decoding studies where 'semantic representations' derived from stimuli are decoded from brain activations. They show that the evaluation techniques used in these studies are underspecified and are therefore not able to distinguish between sentence representations drawn from models optimized for very different tasks. For using these models to make meaningful conclusions about the way linguistic processing is realized in brain activity, they recommend: a) clear specification of the task and mechanisms in the brain hypothesized to be generating or consuming a given representation, b) breaking down the feature space into interpretable sub-spaces (see Section 8 for examples of work where this is applied), and c) using encoding models to ablate the extent to which different model components can explain variance in neural response. Finally, Beinborn et al. (2019) presented a standardized framework for brain-encoding studies, demonstrating the effect which choice of evaluation measure has on the interpretation of model predictive power. Based on this, they offered a set of recommendations regarding choice of metrics and reporting of results.

5 Searching for Syntax

Concurrently, researchers have also sought to understand how the brain computes and represents syntactic structure during language comprehension. By varying the type of stimuli presented to subjects and carrying out comparisons between e.g. a) sentences of different complexities or b) sentences and lists of words, such studies were able to make conclusions about the brain regions which show sensitivity to sentence structure and about the temporal profile of brain activity (Just et al., 1996; Dapretto and Bookheimer, 1999; Humphries et al., 2006; Hagoort, 2005; Pallier et al., 2011; Fedorenko et al., 2012; Brennan and Pylkkänen, 2012).

The use of computational models in such work can be traced back to pyscholinguistic studies of syntactic processing difficulty where probablistic language models (such as probabilistic context-free grammars (PCFG)) were used to provide predictions about human reading times or grammaticality judgements (Christiansen and Chater, 1999; Tabor and Tanenhaus, 1999; Hale, 2001; Levy, 2008; Reitter et al., 2011). Parviz et al. (2011) found that measures derived from an incremental syntactic parser and a 4-gram markov chain language model were predictive of the N400 ERP component.

Frank et al. (2013) expanded on these findings, showing that word surprisal estimates from a Recurrent Neural Network language (RNN) model provided better predictions compared to n-gram models and phrase structure grammars. Frank et al. (2015) went a step further, extracting four different word information (word and part-of-speech surprisal and entropy reduction) measures and evaluating their predictivity of six different ERP components which are known to be sensitive to violations. Their results indicated that readers' expectations about upcoming words do not necessarily rely on hierarchical sentence structure (see Frank and Christiansen (2018) for further relevant discussion).

Hale et al. (2015) apply the same approach to neural time courses obtained using fMRI. In contrast with Frank et al. (2015), their findings showed that grammatical predictors were predictive of BOLD (see Section 2) over n-gram baselines, indicating the sensitivity of human sentence processing to hierarchical structure, at least in the anterior temporal lobe. They posited that this discrepancy might be due the difficulty of measuring nuanced syntactic processing activity with behavioral and ERP measures. Brennan et al. (2016) collected fMRI recordings of subjects listening to naturalistic storytelling data. Using this, they showed findings similar to those of Hale et al. (2015): abstract syntactic structures (context-free phrase structure grammars and and mildly context-sensitive X-bar structural descriptions) were predictive of brain activity in the temporal lobes, but not in other areas, whereas predictors derived from n-gram models showed correlations across a broad network of areas. Brennan and Pylkkänen (2017) built on this, using MEG data, they found that anterior temporal lobe (ATL) activity is well-predicted by a parse-step measure derived from a predictive left-corner parser, which is consistent with the hypothesis that the ATL is sensitive to basic combinatoric operations. Henderson et al. (2016) also arrived at similar findings. Using fixation-related fMRI³ and syntactic surprisal statistic derived from a PFCG, they found that this surprisal measure modulates activity in the left ATL and the left inferior frontal gyrus. Brennan and Hale (2019) further addressed the extent to which hierarchical structure is needed for language comprehension, using a naturalistic EEG dataset of participants listening to a chapter of Alice in Wonderland. They corroborate that, for left-anterior and right-anterior electrodes after around 200 ms from onset, syntactic surprisal measures derived from models which condition on hierarchical structure capture variance beyond models that condition on word sequences alone.

Zooming in on the algorithmic level, Stanojević et al. (2021) employed Combined Categorical Grammar (CCG) (Steedman and Baldridge, 2011), a mildly context-sensitive grammar, to extract node count based complexity metrics. They found that these metrics could better predict fMRI activation time courses in language ROIs compared to Penn Treebank-style context-free phrase structure grammars, confirming Brennan et al. (2016)'s finding that mildly context-sensitive grammars can better capture aspects of human sentence processing. They attribute this to an operation designed to make CCG handle "movement" constructions in a more plausible manner compared to CFGs.

Hale et al. (2018) pioneered the use of Recurrent neural network grammars (Dyer et al., 2016) (RNNGs) as models of human syntactic processing. RNNGs are generative models of both trees and strings (jointly) where neural networks are parametrized to choose parsing transitions. Using the same linking hypotheses described above and a beam search procedure (over derivations), they found

³A method that combines eyetracking with BOLD to locate brain activity as a function of the currently fixated item.

that the measures estimated from the RNNG's intermediate states predicted several ERP components including P600. These same components were not significantly predicted using an LSTM (Hochreiter and Schmidhuber, 1997) language language model which operates sequentially, having no access to structural information. Brennan et al. (2020) build on this, using RNNGs in conjunction with fMRI data recorded for the same Alice in Wonderland chapter to localise the information used for predictive processing across six ROIs associated with language processing. Their findings, confirm earlier ones: word-by-word surprisal⁴ derived from a sequential LSTM language model correlates with activity in a range of temporal and frontal brain regions; when surprisal is conditioned by explicit hierarchy as in the RNNG language model, fit is improved above the LSTM model in the left posterior temporal lobe and the left inferior parietal lobule. In addition, a measure based on the number of parsing steps explored by the RNNG model between words — which is hypothesized to reflect compositional processing — is found to be predictive of activation in most ROIs, particularly when the RNNG is setup to directly compose phrases, and not only encode hierarchy.

Most recently, Reddy and Wehbe (2021) proposed a shift from effort-based metrics (node count, surprisal, etc.) that allow for the localisation in the brain of a general notion of syntax to a methodology which allows for the studying of specific syntactic features. To accomplish this, they presented a subgraph embeddings-based method that models the constituency tree based structure of sentences. They showed that this method was more predictive of brain activity than a commonly used effort-based metric (node count), and used it to demonstrate that the brain encodes complex, phrase-level syntactic information.

6 Modelling Multiple Levels of Abstraction

Language comprehension from speech or text involves many perceptual and cognitive subprocesses, from perceiving individual words, to parsing sentences, to building semantic representations that are contextualised by world-knowledge and previous utterances in a discourse, etc. In this section, we survey work which has performed simultaneous analyses at multiple levels of perceptual and linguistic abstraction.

In one of the first studies to use fMRI recordings from subjects reading naturalistic data (a chapter from Harry Potter and the Sorcerer's stone), Wehbe et al. (2014a) presented one such integrated analysis. Employing a model consisting of a diverse set of visual, orthographic, lexical, syntactic, semantic, and discourse properties, they predicted neural activity per voxel as a linear combination of the features. Using this encoding (linear regression) model, they were able to examine the brain areas which were sensitive to the different types of features, enabling them to distinguish between areas on the basis of the type of information they represent. Using MEG data gathered for the same chapter of Harry Potter, Wehbe et al. (2014b) was one of the earliest works to investigate the alignment between the representations used by RNN language models and brain activity as subjects read a story. They train auto-regressive neural language models (NLMs) (Mikolov et al., 2011) on a corpus of Harry potter fan fiction and extract three classes of features per time-step: the embeddings, the hidden state vectors (previous and current), and the predicted output probabilities. In a series of classification experiments involving prediction of the MEG signal from each of these feature classes, they analyse how well each predicts MEG activity along the temporal and spatial dimensions, finding: a) brain activity is well predicted by the hidden state representation of (past) context, b) the embedding features are good predictors of the current word, and c) the activity in different brain regions is predicted with a delay that corresponds with the processing pathway that starts in the visual cortex and moves up. Lopopolo et al. (2017) followed a similar approach with the goal of disentangling phonological, lexical, and syntactic information present in the fMRI recordings of subjects listening to a set of naturalistic (Dutch) literary texts. Instead of a neural network language model, however, they estimate perplexity statistics from trigram markov models (based on lexical forms, part-of-speech tags, and transcribed phonemes). Their results evidence a set of cortical networks that are separately activated for each of the three types of information, with no significant overlap between them.

Huth et al. (2016) also made use of a naturalistic dataset of spoken stories. They represented each word in the stories as a 985-dimensional vector built from co-occurrence statistics, intended to encode semantic information. A linear regression model was estimated per voxel, from the word

⁴Note that surprisal here and in Hale et al. (2018) is not the same as the syntactic surprisal measure based on part-of-speach category which is used in most previous studies, but is based on the lexical item itself.

representations. Controlling for lower-level features, they evaluated correlation between predicted and actual BOLD signal, finding significant predictiveness in various areas associated with the brain's semantic network. They propose a Bayesian algorithm that constructs a generative model of areas tiling the cortex across subjects, resulting in single atlas that describes the distribution of semantically selective functional areas in human cerebral cortex. Jain and Huth (2018) follow Wehbe et al. (2014b) in using an RNN language model to incorporate context into encoding models that predict the neural response (fMRI in this case) of subjects listening to natural speech. They find that the representations from NLM hidden states outperform previously used non-contextual word embedding models in predicting brain response and that context length and choice of layer differentially predict the activation across cortical regions. LeBel et al. (2021) followed a similar approach, focusing on the Cerebellum. Using features that span the hierarchy of language processing, they showed that neural response to language in the Cerebellum is best explained by high-level conceptual features — especially those associated with social semantic categories — rather than lower-level acoustic or phonemic ones. Finally, Li et al. (2020) formalised several linguistic theories about pronoun resolution as symbolic computational models, evaluating them as well as an ANN conference resolution model according to their ability to predict brain activity patterns (both MEG and fMRI) time-locked at each third person pronoun in 'The Little Prince' dataset as English and Chinese subjects listened to an audiobook recording (Stehwien et al., 2020). They find that the memory-based ACT-R model (Van Rij et al., 2013), which chooses the entity in working memory with the highest activation as the antecedent of a pronoun, best explains the neural response associated with pronoun resolution.

In seminal work adjacent to that described above because it studies neural oscillation patterns, Martin and Doumas (2017) showed that a computational model (Doumas et al., 2008), which uses time to encode hierarchy and was originally designed for relational reasoning, can be applied to sentence processing, exhibiting oscillatory patterns of activation closely resembling the human cortical response to the same stimuli. From this model which learns and generates structured, symbolic representations using time-based binding in a layered neural network, they are able to derive an explicit computational mechanism⁵) for how the human brain might convert perceptual features into hierarchical representations, offering a linking hypothesis between linguistic and cortical computations. Martin (2020) built on this, proposing an integrated model of language comprehension across multiple timescales starting from perception and lexicalisation to syntactic composition and comprehension. Drawing on ideas from models of entertainment to speech, structure building mechanisms from systems neuroscience (coordinate transforms via gain modulation), and the neurosymbolic relation learning model referenced above, the proposed model is able to unify the neurphysiological, cognitive, and linguistic computational levels.

7 Integrative Benchmarking and Computational Convergence

While the shift from using several separate models which operate at different levels of abstraction to synergistic neural models has led to both better prediction of neural response and better performance on a range of linguistics tasks, Schrimpf et al. (2020a) posited that in order to understand the relationship between these computational models, neural response, and behaviour, large-scale integrative benchmarking is needed wherein patterns of performance are established across many models and datasets. Using measurements from three datasets⁶ of neural response recordings (fMRI and ECoG) as well self-paced reading data, they tested a wide range of computational models, from simple word embeddings to larger, recurrent and self-attention based ones, evaluating them based on how well they predicted the neural response recordings and the self-paced reading patterns, with reference to how well they perform tasks such as next word prediction. Their results demonstrated that: a) there is a variance across models in ability to predict neural response and self-paced reading patterns (e.g. GPT-2 (Radford et al., 2019) almost completely explains the variance in neural response, while GloVe performs poorly), b) there is a consistency in how models score across datasets and experiments, c) models that perform better at next word prediction (but not the GLUE suite of natural language understanding tasks (Wang et al., 2018)) better predict neural response measurements and self-paced reading times, d) models that better predict neural response better predict reading times, and e) for

⁵See discussion of Gauthier and Ivanova (2018) in Sec. 4.

⁶With stimuli that varied in length and domain and was either presented to subjects as audio or read.

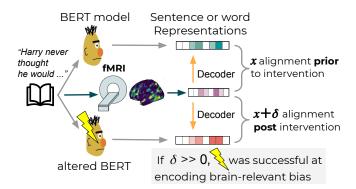


Figure 2: An example of the application of computational control. A baseline BERT model and an 'altered' one are used to generate linguistic representation of stimuli. The intervention to alter the LM can be evaluated based on how well the resulting representations can be decoded from brain activation data compared to the baseline, controlling for other factors.

some models, architecture alone, randomly initialised, can reliably predict brain activity and reading times.

Also aiming to establish a systematic ontology of whether and when ANN models representations align with brain activations, Caucheteux and King (2020) trained 7, 400 different ANN models with different architectures and objectives. They evaluated the models according to how well a ridge-regularised linear could be trained to map from their internal representations to MEG recordings of 104 subjects reading words sequentially presented randomly word or as sentences. Aiming to arrive at a spatio-temporal decomposition of the reading network, they found: a) as previously shown, the final-layer activations a deep convolutional neural network trained on character recognition are predictive of activation in the early visual cortex, b) word-type embeddings (Word2Vec (Mikolov et al., 2013)) predicted brain response above and beyond the visual representations starting from \approx 200 ms after onset, in the left-lateralized temporal and prefrontal cortices, especially, c) After \approx 1 second from word onset, contextualised word representations from LMs led to significantly better prediction than the previous two feature sets, particularly in the regions associated with high-level sentence processing. Subsequently, Caucheteux et al. (2021b) found that GPT-2's predictiveness of fMRI activation for a subject-story pair in the Narratives dataset correlated to subjects' comprehension scores assessed per story.

Most recently, Antonello et al. (2021) adapted a encoder-decoder method from computer vision that measures transferability between different models to construct a language representation embedding space. Using this, they could describe and visualise the relationships between representations derived from a 100 diverse types of language models, ranging from static word-embeddings (GloVe, etc.) and interpretable tagging models (part-of-speech, named entity recognition, chunking etc.) to machine translation models and autoregressive LMs (GPT-2, etc.) or masked LMs (BERT, etc.). They show that this space has a low-dimensional structure and that it intuitively models how different representations relate to one another. Moreover, fitting encoding models to predict fMRI data from each of the 100 language representations, they find the embedding space's structure, when mapped to the brain, reflects well-known language processing hierarchies and predicts which representations map well to which areas in the brain.

8 Computational Controls

To establish a relationship between linguistic function and neurobiology, it is necessary to decompose the various facets of linguistic processing and map them onto the units of neurobiology (Poeppel, 2012). Traditionally, this has been attempted through careful manipulation of stimuli e.g. scrambled sentences vs. natural sentences. Instead of applying strict controls at the level of the stimuli, recent work has explored the possibility of applying computational controls (see Figure 2 for a demonstrative example). When successful, this allows for a) testing a wider range of more specific questions concerning conditions which would be significantly more difficult or expensive to control

for at the level of the stimuli and b) the use of naturalistic stimuli which more closely resemble real-world contexts.

For instance, by varying the length of context which is fed to a LM or providing it with distorted context, Jain and Huth (2018) were able to ablate and the effect contextual information on alignment to neural response. Abnar et al. (2019) followed a similar protocol, employing an extension of the commonly used Representation Similarity Analysis paradigm (Kriegeskorte et al., 2008) where different instances of the same model are compared as a single parameter is altered. Varying the parameter of context length for four classes of language models, they find that increased context length not lead to increased representational alignment to brain recordings.

Gauthier and Levy (2019) took a pretrained masked language model (BERT (Devlin et al., 2018)) as a baseline sentence representation model, finetuning it on a suite of tasks which are commonly used to evaluate 'Natural Language Understanding' (NLU). Training a regularised linear decoder to map from the fMRI sentence-level data of Pereira et al. (2018) to representations extracted using the finetuned models, they find decreased brain decoding performance across all tested NLU tasks, but find improved decoding performance for scrambled language modelling tasks where fine-grained syntactic information is removed. This result might be seen as disagreeing with an emerging consensus in the literature regarding the role of hierarchical structure in sentence processing ⁷ and once again raised questions regarding the fine-grained-ness of the information which can be expected to be found in fMRI data using linear mapping as a linking hypothesis. Abdou et al. (2021) followed a similar methodology, proposing an approach which enables the evaluation of more targeted hypotheses about linguistic composition and structure by finetuning LMs with an auxilliary attention constraint to inject structural bias derived from three linguistic formalisms into LM representations. They showed that, across the three formalisms, this improves brain decoding performance for the Harry Potter data, while for the Pereira et al. (2018) data the effect is less clear.

The methods outlined so far apply controls by manipulation of either the input or the training objective and task. Toneva et al. (2020) devised an approach for studying the neural substrates associated with the 'supra-word meaning' of a phrase with a computational control that disentangles composed-from individual-word meaning. Using regularised linear regression models, they learn mappings between word embeddings and context representations, which they then subtract from the representations of items in the target space to obtain 'residual' representations for a word (sans contextual information) or for a phrase beyond its individual words. For an fMRI dataset, they find that this supra-word representation predicts activity in the anterior and posterior temporal cortices. In MEG recordings, however, they find no clear signal for supra-word meaning. Similarly, Caucheteux et al. (2021a) proposed a method to factorise distributed LM representations according to a taxonomy of: syntax vs. semantics and lexical vs. compositional. They constructed syntactic representations by averaging over the LM activations for a set of sentences with the same syntactic structure. A LM's word embedding is taken as a lexical representation, and the contextualised representation of higher layers as the compositional one. A semantic representation is taken to be the residual of subtracting the syntactic representation, which can be done at the lexical or the compositional level. Extracting each of these representations from the relevant stimuli text, they learn ridge-regularised mappings to fMRI recordings of subjects listening to the stories from the Narratives dataset (Nastase et al., 2021). Their results showed: a) compositional representations recruit a broader cortical network than lexical ones and b) syntax and semantics appear to share a common neural basis, in line with recent findings from the neuroscience literature (Fedorenko et al., 2020).

Examining the question of predictive coding (Rao and Ballard, 1999) in language processing, Goldstein et al. (2021) investigated whether (and how) humans and LMs engage in spontaneous prediction when processing language. To accomplish this, they: a) used a sliding-window method to show humans could effectively predict the next word in a transcribed story across sentence positions and part-of-speech; b) extracted word-by-word prediction probabilities from GPT-2 for the same story, finding them to be correlated to the human predictability scores, with better correlations as the amount of previous context fed to the model increased; c) showed, in a set of experiments with ECoG data recorded while subjects listened to a spoken story, that static word embeddings (GloVe) as well as an arbitrary embeddings baseline designed to ablate the effect of correlations between adjacent word embeddings of bigrams, could predict neural activation (across electrodes in the left hemisphere)

 $^{^{7}}$ e.g. Hale et al. (2015); Brennan et al. (2016); Henderson et al. (2016), etc. but perhaps agreeing with Frank et al. (2013) and Frank et al. (2015). Refer to Section 5.

starting from 800 ms before word onset; d) at earlier time from word onset, neural responses were better predicted for predictable words than for unpredictable words, e) neural response before onset was better modelled for the words subjects predicted even when they did not match the correct words which they subsequently perceived; f) employing representations which incorporate previous context from GPT-2's activations led to both better and earlier (i.e. pre-onset) prediction of neural activity, particularly in high-order language areas; g) ablated this result, showing that it was due to both better representation of previous context (compared e.g. to a baseline of mean-pooled GloVe embeddings) and to improved next-word prediction. Finally, Jain et al. (2021) presented a novel multi-timescale encoding model for predicting fMRI responses to natural speech. Using a) an LSTM where the memory timescale of each individual unit is fixed according to a power law distribution and b) a Gaussian radial basis function kernel to downsample the stimuli representations, they are able directly estimate the timescale of information represented in a voxel of fMRI data from the encoding model's weights. They find that this method which relies on 'computational control' leads to a more fine-grained map of timescale selectivity compared to previous work which relied on stimulus manipulation (Lerner et al., 2011).

9 Using Brain Activation Measurements to Improve/Evaluate NLP Models

The work described in this survey so far has employed computational language models towards the study of human language processing. Working in the other direction, researchers have also attempted to leverage data and insights from neurolinguistics to evaluate and improve language models. To that end, Fyshe et al. (2014) presented an algorithm that integrates brain activations into the construction of word-type vector space models. Their approach, based on Non-Negative Sparse Embeddings (Murphy et al., 2012), constrains the embedding space so that words close in brain activation space also have similar representations in the embedding space. They find the resulting embeddings to better match a behavioral measure of semantics and to better predict corpus data for unseen words. In an opinion paper on word embedding evaluation, Søgaard (2016) presented some preliminary experiments and argued that because evaluation on downstream tasks is expensive and impractical and evaluation on corpus statistics is circular, alignment to human word processing measurements should be used as a an evaluation approach. On that account, Hollenstein et al. (2020b) presented CogniVal, a framework for the evaluation of word embeddings based on their ability to predict data from 15 datasets of eyetracking, EEG, and fMRI signals recorded during language processing.

Testing the possibility of using EEG data to improve NLP models, Hollenstein et al. (2019) extract word-level EEG features from different frequency ranges, using the ZUCO dataset (Hollenstein et al., 2020a) which contains simultaneous eye-tracking and EEG measurements of natural sentence reading. Combining these features with standard word-level and character-level information employed by NLP models, they find (modest) improvements over baselines which do not include the EEG features across three tasks (named entity recognition, relation classification and sentiment analysis).

Pioneering the use of LMs for *in silico* modelling⁸, Schwartz et al. (2019) finetuned BERT models to predict (fMRI and MEG) brain activity measurements, biasing them to learn generalizable relationships between text and brain activity. They find that the the fine-tuned models are better at predicting brain activity across subjects and recording modalities than non-finetuned models. Finally, Toneva and Wehbe (2019) used brain response data to interpret the information encoded in the internal representations of different layers of LMs for various context lengths, based on how well they predicted activation in different groupings of language ROIs. Ablating the role of attention, they found that replacing the learned attention function with a uniform distribution in early BERT layers led to better prediction of brain activation. Applying these altered models to a task which evaluates the syntactic capabilities of LMs (Marvin and Linzen, 2018), they found significant improvements compared to the vanilla pretrained model, demonstrating that altering models so that they align better with brain recordings can lead to better performance on NLP benchmarks.

10 Outlook

Present-day advances in machine learning have enabled the building of language models which through training on immense volumes of data are capable of simulating human behaviour on various

⁸Where a computational model is used to simulate (some facet of) brain function.

linguistic tasks better than ever before. Concurrently, datasets of neural response recordings that both include more subjects and utilise a larger amount of naturalistic stimuli than previously possible have been made openly accessible to the research community (Bhattasali et al., 2020; Stehwien et al., 2020; Nastase et al., 2021). Exploiting these advances, recent studies a) found evidence that autoregressive ANN language models converge to solutions that reliably align to brain activations (Caucheteux and King, 2020; Schrimpf et al., 2020b) and b) worked towards furthering our understanding of fundamental aspects of naturalistic language comprehension, e.g. the role of hierarchical structure (Brennan and Hale, 2019; Stanojević et al., 2021), the function of predictive coding (Goldstein et al., 2021), and the neural substrates responsible for lexical and combinatorial semantics (Toneva et al., 2020).

While the manner in which current ANN language models learn is manifestly inefficient and unhuman-like — leveraging text-only information and requiring orders of magnitude more data than a human child — the solutions to which they converge have been shown to both remarkably simulate aspects of linguistic understanding and align to cognitive measurements. This offers reasonable grounds for optimism that the time is ripe for these models to both contribute to and benefit from work on the *Mapping Problem* (Poeppel, 2012): the problem of mapping the elementary units of linguistic processing to their neurobiological counterparts. As Hale et al. (2021) argues, linguistically-interpretable models are likely to be key for this symbiosis, allowing for a principled decomposition of a model's components into smaller linguistically meaningful units. In view of the approaches to computational control described in Section 8, I posit that even models that are not intrinsically interpretable will be useful, given the plethora of interpretability methods recently developed (Belinkov et al., 2020).

By serving as a plausible simulation of human learning, future work that explores more human-like training setups (e.g. multi-modal or embodied learning), objectives, and model architectures can also help empirically answer long-standing questions in neuro- and cognitive linguistics.

References

- Mostafa Abdou, Ana Valeria González, Mariya Toneva, Daniel Hershcovich, and Anders Søgaard. 2021. Does injecting linguistic structure into language models lead to better alignment with brain recordings? *arXiv preprint arXiv:2101.12608*.
- Samira Abnar, Rasyan Ahmed, Max Mijnheer, and Willem Zuidema. 2017. Experiential, distributional and dependency-based word embeddings have complementary roles in decoding brain activity. *arXiv preprint arXiv:1711.09285*.
- Samira Abnar, Lisa Beinborn, Rochelle Choenni, and Willem Zuidema. 2019. Blackbox meets blackbox: Representational similarity & stability analysis of neural language models and brains. In *Proceedings of the 2019 ACL Workshop BlackboxNLP: Analyzing and Interpreting Neural Networks for NLP*, pages 191–203, Florence, Italy. Association for Computational Linguistics.
- Andrew J Anderson, Elia Bruni, Ulisse Bordignon, Massimo Poesio, and Marco Baroni. 2013. Of words, eyes and brains: Correlating image-based distributional semantic models with neural representations of concepts. In *Proceedings of the 2013 conference on empirical methods in natural language processing*, pages 1960–1970.
- Andrew J Anderson, Douwe Kiela, Stephen Clark, and Massimo Poesio. 2017. Visually grounded and textual semantic models differentially decode brain activity associated with concrete and abstract nouns. *Transactions of the Association for Computational Linguistics*, 5:17–30.
- Richard Antonello, Javier Turek, Vy Vo, and Alexander Huth. 2021. Low-dimensional structure in the space of language representations is reflected in brain responses. *arXiv* preprint arXiv:2106.05426.
- Bernard Baars and Nicole M Gage. 2013. Fundamentals of cognitive neuroscience: a beginner's guide. Academic Press.
- Lisa Beinborn, Samira Abnar, and Rochelle Choenni. 2019. Robust evaluation of language-brain encoding experiments. *arXiv preprint arXiv:1904.02547*.
- Yonatan Belinkov, Sebastian Gehrmann, and Ellie Pavlick. 2020. Interpretability and analysis in neural NLP. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics: Tutorial Abstracts*, pages 1–5, Online. Association for Computational Linguistics.

- Yoshua Bengio. 2009. Learning deep architectures for AI. Now Publishers Inc.
- Shohini Bhattasali, Jonathan Brennan, Wen-Ming Luh, Berta Franzluebbers, and John Hale. 2020. The alice datasets: fMRI & EEG observations of natural language comprehension. In *Proceedings of the 12th Language Resources and Evaluation Conference*, pages 120–125, Marseille, France. European Language Resources Association.
- Idan Blank, Zuzanna Balewski, Kyle Mahowald, and Evelina Fedorenko. 2016. Syntactic processing is distributed across the language system. *Neuroimage*, 127:307–323.
- Jonathan Brennan and Liina Pylkkänen. 2012. The time-course and spatial distribution of brain activity associated with sentence processing. *Neuroimage*, 60(2):1139–1148.
- Jonathan R Brennan, Chris Dyer, Adhiguna Kuncoro, and John T Hale. 2020. Localizing syntactic predictions using recurrent neural network grammars. *Neuropsychologia*, 146:107479.
- Jonathan R Brennan and John T Hale. 2019. Hierarchical structure guides rapid linguistic predictions during naturalistic listening. *PloS one*, 14(1):e0207741.
- Jonathan R Brennan and Liina Pylkkänen. 2017. Meg evidence for incremental sentence composition in the anterior temporal lobe. *Cognitive science*, 41:1515–1531.
- Jonathan R Brennan, Edward P Stabler, Sarah E Van Wagenen, Wen-Ming Luh, and John T Hale. 2016. Abstract linguistic structure correlates with temporal activity during naturalistic comprehension. *Brain and language*, 157:81–94.
- Joan Bresnan, Ash Asudeh, Ida Toivonen, and Stephen Wechsler. 2015. Lexical-functional syntax. John Wiley & Sons.
- Paul Broca et al. 1861. Perte de la parole, ramollissement chronique et destruction partielle du lobe antérieur gauche du cerveau. *Bull Soc Anthropol*, 2(1):235–238.
- Tom B Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *arXiv preprint arXiv:2005.14165*.
- Luana Bulat, Stephen Clark, and Ekaterina Shutova. 2017. Speaking, seeing, understanding: Correlating semantic models with conceptual representation in the brain. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 1081–1091.
- John A Bullinaria and Joseph P Levy. 2013. Limiting factors for mapping corpus-based semantic representations to brain activity. *PloS one*, 8(3):e57191.
- Charlotte Caucheteux, Alexandre Gramfort, and Jean-Remi King. 2021a. Disentangling syntax and semantics in the brain with deep networks. In *International Conference on Machine Learning*, pages 1336–1348. PMLR.
- Charlotte Caucheteux, Alexandre Gramfort, and Jean-Rémi King. 2021b. Gpt-2's activations predict the degree of semantic comprehension in the human brain. *bioRxiv*.
- Charlotte Caucheteux and Jean-Rémi King. 2020. Language processing in brains and deep neural networks: computational convergence and its limits. *BioRxiv*.
- Noam Chomsky. 1956. Three models for the description of language. *IRE Transactions on information theory*, 2(3):113–124.
- Noam Chomsky. 2009. Syntactic structures. De Gruyter Mouton.
- Noam Chomsky. 2014a. Aspects of the Theory of Syntax, volume 11. MIT press.
- Noam Chomsky. 2014b. The minimalist program. MIT press.
- Morten H Christiansen and Nick Chater. 1999. Toward a connectionist model of recursion in human linguistic performance. *Cognitive Science*, 23(2):157–205.

- Mirella Dapretto and Susan Y Bookheimer. 1999. Form and content: dissociating syntax and semantics in sentence comprehension. *Neuron*, 24(2):427–432.
- Barry Devereux, Colin Kelly, and Anna Korhonen. 2010. Using fmri activation to conceptual stimuli to evaluate methods for extracting conceptual representations from corpora. In *Proceedings of the NAACL HLT 2010 First Workshop on Computational Neurolinguistics*, pages 70–78.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2018. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*.
- Leonidas AA Doumas, John E Hummel, and Catherine M Sandhofer. 2008. A theory of the discovery and predication of relational concepts. *Psychological review*, 115(1):1.
- Chris Dyer, Adhiguna Kuncoro, Miguel Ballesteros, and Noah A Smith. 2016. Recurrent neural network grammars. *arXiv preprint arXiv:1602.07776*.
- Michael Eickenberg, Alexandre Gramfort, Gaël Varoquaux, and Bertrand Thirion. 2017. Seeing it all: Convolutional network layers map the function of the human visual system. *NeuroImage*, 152:184–194.
- Evelina Fedorenko and Idan A Blank. 2020. Broca's area is not a natural kind. *Trends in cognitive sciences*, 24(4):270–284.
- Evelina Fedorenko, Idan Asher Blank, Matthew Siegelman, and Zachary Mineroff. 2020. Lack of selectivity for syntax relative to word meanings throughout the language network. *Cognition*, 203:104348.
- Evelina Fedorenko, Alfonso Nieto-Castanon, and Nancy Kanwisher. 2012. Lexical and syntactic representations in the brain: an fmri investigation with multi-voxel pattern analyses. *Neuropsychologia*, 50(4):499–513.
- Evelina Fedorenko and Sharon L Thompson-Schill. 2014. Reworking the language network. *Trends in cognitive sciences*, 18(3):120–126.
- Jerry Fodor and Merrill Garrett. 1966. Some reflections on competence and performance. *Psycholinguistic papers*, pages 135–179.
- Jerry A Fodor. 1983. The modularity of mind. MIT press.
- Stefan L Frank and Morten H Christiansen. 2018. Hierarchical and sequential processing of language: A response to: Ding, melloni, tian, and poeppel (2017). rule-based and word-level statistics-based processing of language: insights from neuroscience. language, cognition and neuroscience. *Language, Cognition and Neuroscience*, 33(9):1213–1218.
- Stefan L Frank, Leun J Otten, Giulia Galli, and Gabriella Vigliocco. 2013. Word surprisal predicts n400 amplitude during reading.
- Stefan L Frank, Leun J Otten, Giulia Galli, and Gabriella Vigliocco. 2015. The erp response to the amount of information conveyed by words in sentences. *Brain and language*, 140:1–11.
- Angela D Friederici. 2011. The brain basis of language processing: from structure to function. *Physiological reviews*, 91(4):1357–1392.
- Angela D Friederici and Sarah ME Gierhan. 2013. The language network. *Current opinion in neurobiology*, 23(2):250–254.
- Angela D Friederici, Erdmut Pfeifer, and Anja Hahne. 1993. Event-related brain potentials during natural speech processing: Effects of semantic, morphological and syntactic violations. *Cognitive brain research*, 1(3):183–192.
- Alona Fyshe, Partha P Talukdar, Brian Murphy, and Tom M Mitchell. 2014. Interpretable semantic vectors from a joint model of brain-and text-based meaning. In *Proceedings of the conference*. *Association for Computational Linguistics. Meeting*, volume 2014, page 489. NIH Public Access.

- Jon Gauthier and Anna Ivanova. 2018. Does the brain represent words? an evaluation of brain decoding studies of language understanding. *arXiv* preprint arXiv:1806.00591.
- Jon Gauthier and Roger Levy. 2019. Linking artificial and human neural representations of language. arXiv preprint arXiv:1910.01244.
- Norman Geschwind. 1970. The organization of language and the brain. Science, 170(3961):940–944.
- Ariel Goldstein, Zaid Zada, Eliav Buchnik, Mariano Schain, Amy Price, Bobbi Aubrey, Samuel A Nastase, Amir Feder, Dotan Emanuel, Alon Cohen, et al. 2021. Thinking ahead: prediction in context as a keystone of language in humans and machines. *bioRxiv*, pages 2020–12.
- Ian Goodfellow, Yoshua Bengio, and Aaron Courville. 2016. Deep learning. MIT press.
- Alex Graves, Abdel-rahman Mohamed, and Geoffrey Hinton. 2013. Speech recognition with deep recurrent neural networks. In 2013 IEEE international conference on acoustics, speech and signal processing, pages 6645–6649. Ieee.
- Joseph Greenberg. 1963. Some universals of grammar with particular reference to the order of meaningful elements. *In J. Greenberg, ed., Universals of Language. 73-113. Cambridge, MA*.
- Peter Hagoort. 2005. On broca, brain, and binding: a new framework. *Trends in cognitive sciences*, 9(9):416–423.
- Peter Hagoort, Colin Brown, and Jolanda Groothusen. 1993. The syntactic positive shift (sps) as an erp measure of syntactic processing. *Language and cognitive processes*, 8(4):439–483.
- John Hale. 2001. A probabilistic earley parser as a psycholinguistic model. In Second meeting of the north American chapter of the association for computational linguistics.
- John Hale, Luca Campanelli, Jixing Li, Shohini Bhattasali, Christophe Pallier, and Jonathan Brennan. 2021. Neuro-computational models of language processing. *Annual Review of Linguistics*.
- John Hale, Chris Dyer, Adhiguna Kuncoro, and Jonathan R Brennan. 2018. Finding syntax in human encephalography with beam search. *arXiv preprint arXiv:1806.04127*.
- John Hale, David Lutz, Wen-Ming Luh, and Jonathan Brennan. 2015. Modeling fmri time courses with linguistic structure at various grain sizes. In *Proceedings of the 6th workshop on cognitive modeling and computational linguistics*, pages 89–97.
- John M Henderson, Wonil Choi, Matthew W Lowder, and Fernanda Ferreira. 2016. Language structure in the brain: A fixation-related fmri study of syntactic surprisal in reading. *Neuroimage*, 132:293–300.
- J Craig Henry. 2006. Electroencephalography: basic principles, clinical applications, and related fields. *Neurology*, 67(11):2092–2092.
- Sepp Hochreiter and Jürgen Schmidhuber. 1997. Long short-term memory. *Neural computation*, 9(8):1735–1780.
- Nora Hollenstein, Maria Barrett, Marius Troendle, Francesco Bigiolli, Nicolas Langer, and Ce Zhang. 2019. Advancing nlp with cognitive language processing signals. *arXiv preprint arXiv:1904.02682*.
- Nora Hollenstein, Marius Troendle, Ce Zhang, and Nicolas Langer. 2020a. ZuCo 2.0: A dataset of physiological recordings during natural reading and annotation. In *Proceedings of the 12th Language Resources and Evaluation Conference*, pages 138–146, Marseille, France. European Language Resources Association.
- Nora Hollenstein, Adrian van der Lek, and Ce Zhang. 2020b. CogniVal in action: An interface for customizable cognitive word embedding evaluation. In *Proceedings of the 28th International Conference on Computational Linguistics: System Demonstrations*, pages 34–40, Barcelona, Spain (Online). International Committee on Computational Linguistics (ICCL).

- Colin Humphries, Jeffrey R Binder, David A Medler, and Einat Liebenthal. 2006. Syntactic and semantic modulation of neural activity during auditory sentence comprehension. *Journal of cognitive neuroscience*, 18(4):665–679.
- Alexander G Huth, Wendy A De Heer, Thomas L Griffiths, Frédéric E Theunissen, and Jack L Gallant. 2016. Natural speech reveals the semantic maps that tile human cerebral cortex. *Nature*, 532(7600):453–458.
- Shailee Jain and Alexander G Huth. 2018. Incorporating context into language encoding models for fmri. *BioRxiv*, page 327601.
- Shailee Jain, Shivangi Mahto, Javier S Turek, Vy A Vo, Amanda LeBel, and Alexander G Huth. 2021. Interpretable multi-timescale models for predicting fmri responses to continuous natural speech. *bioRxiv*, pages 2020–10.
- Marcel Adam Just, Patricia A Carpenter, Timothy A Keller, William F Eddy, and Keith R Thulborn. 1996. Brain activation modulated by sentence comprehension. *Science*, 274(5284):114–116.
- Jerrold J Katz and Jerry A Fodor. 1963. The structure of a semantic theory. language, 39(2):170-210.
- Alexander JE Kell, Daniel LK Yamins, Erica N Shook, Sam V Norman-Haignere, and Josh H McDermott. 2018. A task-optimized neural network replicates human auditory behavior, predicts brain responses, and reveals a cortical processing hierarchy. *Neuron*, 98(3):630–644.
- Nikolaus Kriegeskorte. 2015. Deep neural networks: a new framework for modeling biological vision and brain information processing. *Annual review of vision science*, 1:417–446.
- Nikolaus Kriegeskorte, Marieke Mur, and Peter A Bandettini. 2008. Representational similarity analysis-connecting the branches of systems neuroscience. *Frontiers in systems neuroscience*, 2:4.
- Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. 2012. Imagenet classification with deep convolutional neural networks. *Advances in neural information processing systems*, 25:1097–1105.
- Marta Kutas and Steven A Hillyard. 1980. Reading senseless sentences: Brain potentials reflect semantic incongruity. *Science*, 207(4427):203–205.
- Marta Kutas and Steven A Hillyard. 1984. Brain potentials during reading reflect word expectancy and semantic association. *Nature*, 307(5947):161–163.
- George Lakoff and Mark Johnson. 2008. Metaphors we live by. University of Chicago press.
- Amanda LeBel, Shailee Jain, and Alexander G Huth. 2021. Voxelwise encoding models show that cerebellar language representations are highly conceptual. *bioRxiv*.
- Yann LeCun, Yoshua Bengio, et al. 1995. Convolutional networks for images, speech, and time series. *The handbook of brain theory and neural networks*, 3361(10):1995.
- Eric H Lenneberg. 1967. The biological foundations of language. Hospital Practice, 2(12):59-67.
- Yulia Lerner, Christopher J Honey, Lauren J Silbert, and Uri Hasson. 2011. Topographic mapping of a hierarchy of temporal receptive windows using a narrated story. *Journal of Neuroscience*, 31(8):2906–2915.
- Roger Levy. 2008. Expectation-based syntactic comprehension. Cognition, 106(3):1126–1177.
- Jixing Li, Wen-Ming Luh, Liina Pylkkänen, Yiming Yang, and John Hale. 2020. Modeling pronoun resolution in the brain. *bioRxiv*.
- Alessandro Lopopolo, Stefan L Frank, Antal Van den Bosch, and Roel M Willems. 2017. Using stochastic language models (slm) to map lexical, syntactic, and phonological information processing in the brain. *PloS one*, 12(5):e0177794.
- Paul A Luce and David B Pisoni. 1998. Recognizing spoken words: The neighborhood activation model. *Ear and hearing*, 19(1):1.

- Steven J Luck. 2014. An introduction to the event-related potential technique. MIT press.
- Andrea E Martin. 2020. A compositional neural architecture for language. *Journal of Cognitive Neuroscience*, 32(8):1407–1427.
- Andrea E Martin and Leonidas AA Doumas. 2017. A mechanism for the cortical computation of hierarchical linguistic structure. *PLoS biology*, 15(3):e2000663.
- Rebecca Marvin and Tal Linzen. 2018. Targeted syntactic evaluation of language models. *arXiv* preprint arXiv:1808.09031.
- James L McClelland, David E Rumelhart, PDP Research Group, et al. 1986. *Parallel distributed processing*, volume 2. MIT press Cambridge, MA.
- Tomas Mikolov, Kai Chen, Greg Corrado, and Jeffrey Dean. 2013. Efficient estimation of word representations in vector space. *arXiv* preprint arXiv:1301.3781.
- Tomas Mikolov, Stefan Kombrink, Anoop Deoras, Lukar Burget, and Jan Cernocky. 2011. Rnnlm-recurrent neural network language modeling toolkit. In *Proc. of the 2011 ASRU Workshop*, pages 196–201.
- Tom M Mitchell, Svetlana V Shinkareva, Andrew Carlson, Kai-Min Chang, Vicente L Malave, Robert A Mason, and Marcel Adam Just. 2008. Predicting human brain activity associated with the meanings of nouns. *science*, 320(5880):1191–1195.
- Brian Murphy, Marco Baroni, and Massimo Poesio. 2009. Eeg responds to conceptual stimuli and corpus semantics. In *Proceedings of the 2009 Conference on Empirical Methods in Natural Language Processing*, pages 619–627.
- Brian Murphy, Partha Talukdar, and Tom Mitchell. 2012. Learning effective and interpretable semantic models using non-negative sparse embedding. In *Proceedings of COLING 2012*, pages 1933–1950.
- Brian Murphy, Leila Wehbe, and Alona Fyshe. 2018. Decoding language from the brain. *Language*, *cognition*, *and computational models*, pages 53–80.
- Samuel A Nastase, Yun-Fei Liu, Hanna Hillman, Asieh Zadbood, Liat Hasenfratz, Neggin Keshavarzian, Janice Chen, Christopher J Honey, Yaara Yeshurun, Mor Regev, et al. 2021. Narratives: fmri data for evaluating models of naturalistic language comprehension. *bioRxiv*, pages 2020–12.
- Mark M Palatucci, Dean A Pomerleau, Geoffrey E Hinton, and Tom Mitchell. 2009. Zero-shot learning with semantic output codes.
- Christophe Pallier, Anne-Dominique Devauchelle, and Stanislas Dehaene. 2011. Cortical representation of the constituent structure of sentences. *Proceedings of the National Academy of Sciences*, 108(6):2522–2527.
- Mehdi Parviz, Mark Johnson, Blake Johnson, and Jon Brock. 2011. Using language models and latent semantic analysis to characterise the n400m neural response. In *Proceedings of the Australasian Language Technology Association Workshop 2011*, pages 38–46.
- Jeffrey Pennington, Richard Socher, and Christopher D Manning. 2014. Glove: Global vectors for word representation. In *Proceedings of the 2014 conference on empirical methods in natural language processing (EMNLP)*, pages 1532–1543.
- Francisco Pereira, Matthew Botvinick, and Greg Detre. 2013. Using wikipedia to learn semantic feature representations of concrete concepts in neuroimaging experiments. *Artificial intelligence*, 194:240–252.
- Francisco Pereira, Bin Lou, Brianna Pritchett, Samuel Ritter, Samuel J Gershman, Nancy Kanwisher, Matthew Botvinick, and Evelina Fedorenko. 2018. Toward a universal decoder of linguistic meaning from brain activation. *Nature communications*, 9(1):1–13.
- David Poeppel. 2012. The maps problem and the mapping problem: two challenges for a cognitive neuroscience of speech and language. *Cognitive neuropsychology*, 29(1-2):34–55.

- David Poeppel. 2014. The neuroanatomic and neurophysiological infrastructure for speech and language. *Current opinión in neurobiology*, 28:142–149.
- Carl Pollard and Ivan A Sag. 1988. *Information-based syntax and semantics: Vol. 1: fundamentals*. Center for the Study of Language and Information.
- Alan Prince and Paul Smolensky. 2008. Optimality Theory: Constraint interaction in generative grammar. John Wiley & Sons.
- Liina Pylkkänen. 2019. The neural basis of combinatory syntax and semantics. *Science*, 366(6461):62–66.
- Liina Pylkkänen. 2020. Neural basis of basic composition: what we have learned from the red-boat studies and their extensions. *Philosophical Transactions of the Royal Society B*, 375(1791):20190299.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. 2019. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9.
- Rajesh PN Rao and Dana H Ballard. 1999. Predictive coding in the visual cortex: a functional interpretation of some extra-classical receptive-field effects. *Nature neuroscience*, 2(1):79–87.
- Keith Rayner. 1998. Eye movements in reading and information processing: 20 years of research. *Psychological bulletin*, 124(3):372.
- Aniketh Janardhan Reddy and Leila Wehbe. 2021. Syntactic representations in the human brain: beyond effort-based metrics. *bioRxiv*, pages 2020–06.
- David Reitter, Frank Keller, and Johanna D Moore. 2011. A computational cognitive model of syntactic priming. *Cognitive science*, 35(4):587–637.
- Jürgen Schmidhuber. 2015. Deep learning in neural networks: An overview. *Neural networks*, 61:85–117.
- Martin Schrimpf, Idan Blank, Greta Tuckute, Carina Kauf, Eghbal A Hosseini, Nancy Kanwisher, Joshua Tenenbaum, and Evelina Fedorenko. 2020a. The neural architecture of language: Integrative reverse-engineering converges on a model for predictive processing. *BioRxiv*.
- Martin Schrimpf, Jonas Kubilius, Michael J Lee, N Apurva Ratan Murty, Robert Ajemian, and James J DiCarlo. 2020b. Integrative benchmarking to advance neurally mechanistic models of human intelligence. *Neuron*.
- Hinrich Schütze. 1993. Word space. In *Advances in neural information processing systems*, pages 895–902.
- Dan Schwartz, Mariya Toneva, and Leila Wehbe. 2019. Inducing brain-relevant bias in natural language processing models. *arXiv preprint arXiv:1911.03268*.
- David Silver, Aja Huang, Chris J Maddison, Arthur Guez, Laurent Sifre, George Van Den Driessche, Julian Schrittwieser, Ioannis Antonoglou, Veda Panneershelvam, Marc Lanctot, et al. 2016. Mastering the game of go with deep neural networks and tree search. *nature*, 529(7587):484–489.
- José M Soares, Ricardo Magalhães, Pedro S Moreira, Alexandre Sousa, Edward Ganz, Adriana Sampaio, Victor Alves, Paulo Marques, and Nuno Sousa. 2016. A hitchhiker's guide to functional magnetic resonance imaging. *Frontiers in neuroscience*, 10:515.
- Anders Søgaard. 2016. Evaluating word embeddings with fmri and eye-tracking. In *Proceedings of the 1st Workshop on Evaluating Vector-Space Representations for NLP*, pages 116–121.
- Miloš Stanojević, Shohini Bhattasali, Donald Dunagan, Luca Campanelli, Mark Steedman, Jonathan Brennan, and John Hale. 2021. Modeling incremental language comprehension in the brain with combinatory categorial grammar. In *Proceedings of the Workshop on Cognitive Modeling and Computational Linguistics*, pages 23–38.

- Mark Steedman and Jason Baldridge. 2011. Combinatory categorial grammar. *Non-Transformational Syntax: Formal and Explicit Models of Grammar. Wiley-Blackwell*, pages 181–224.
- Sabrina Stehwien, Lena Henke, John Hale, Jonathan Brennan, and Lars Meyer. 2020. The little prince in 26 languages: towards a multilingual neuro-cognitive corpus. In *Proceedings of the Second Workshop on Linguistic and Neurocognitive Resources*, pages 43–49.
- Gustavo Sudre, Dean Pomerleau, Mark Palatucci, Leila Wehbe, Alona Fyshe, Riitta Salmelin, and Tom Mitchell. 2012. Tracking neural coding of perceptual and semantic features of concrete nouns. *NeuroImage*, 62(1):451–463.
- Whitney Tabor and Michael K Tanenhaus. 1999. Dynamical models of sentence processing. *Cognitive Science*, 23(4):491–515.
- Wilson L Taylor. 1953. "cloze procedure": A new tool for measuring readability. *Journalism quarterly*, 30(4):415–433.
- Mariya Toneva, Tom M Mitchell, and Leila Wehbe. 2020. Combining computational controls with natural text reveals new aspects of meaning composition. *bioRxiv*.
- Mariya Toneva and Leila Wehbe. 2019. Interpreting and improving natural-language processing (in machines) with natural language-processing (in the brain). *arXiv preprint arXiv:1905.11833*.
- Jacolien Van Rij, Hedderik Van Rijn, and Petra Hendriks. 2013. How wm load influences linguistic processing in adults: a computational model of pronoun interpretation in discourse. *Topics in cognitive science*, 5(3):564–580.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In *Advances in neural information processing systems*, pages 5998–6008.
- Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R Bowman. 2018. Glue: A multi-task benchmark and analysis platform for natural language understanding. *arXiv* preprint arXiv:1804.07461.
- Leila Wehbe, Brian Murphy, Partha Talukdar, Alona Fyshe, Aaditya Ramdas, and Tom Mitchell. 2014a. Simultaneously uncovering the patterns of brain regions involved in different story reading subprocesses. *PloS one*, 9(11):e112575.
- Leila Wehbe, Ashish Vaswani, Kevin Knight, and Tom Mitchell. 2014b. Aligning context-based statistical models of language with brain activity during reading. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 233–243.
- Carl Wernicke. 1874. The aphasic symptom complex: a psychological study on an anatomical basis. Cohn.
- Daniel LK Yamins and James J DiCarlo. 2016. Using goal-driven deep learning models to understand sensory cortex. *Nature neuroscience*, 19(3):356–365.
- Daniel LK Yamins, Ha Hong, Charles F Cadieu, Ethan A Solomon, Darren Seibert, and James J DiCarlo. 2014. Performance-optimized hierarchical models predict neural responses in higher visual cortex. *Proceedings of the national academy of sciences*, 111(23):8619–8624.