



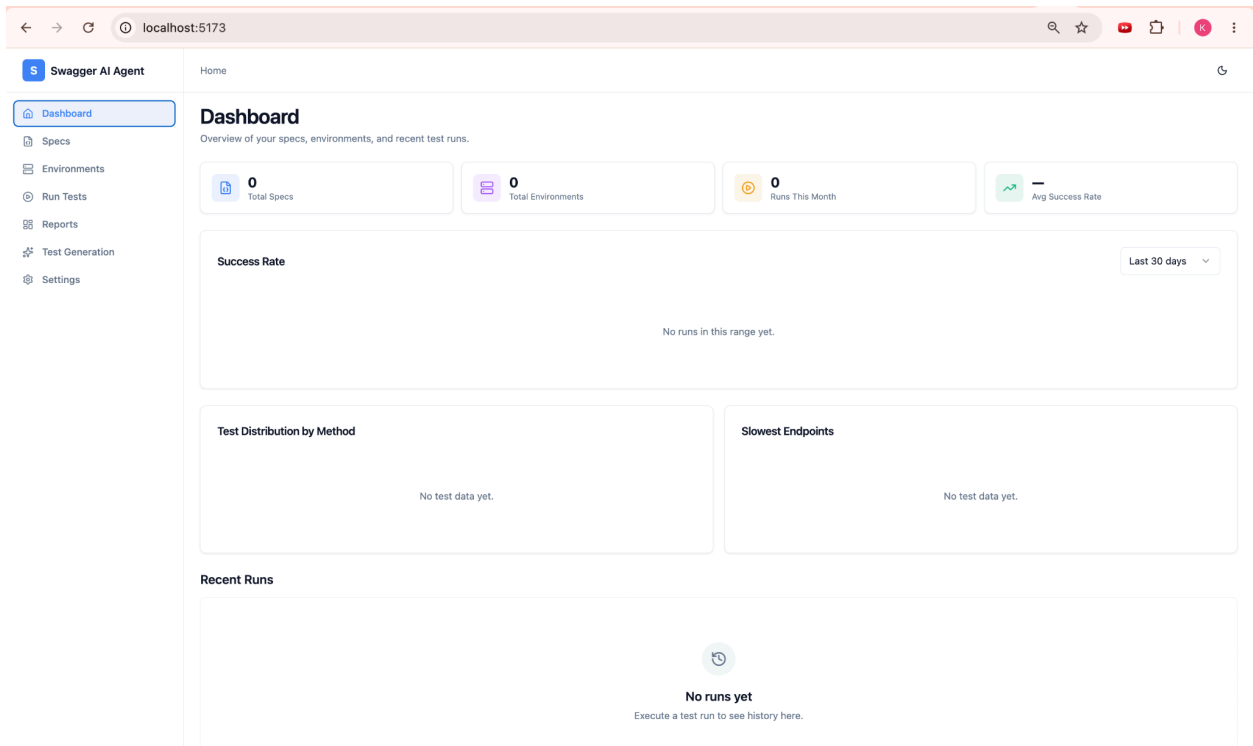

Spec import by url:

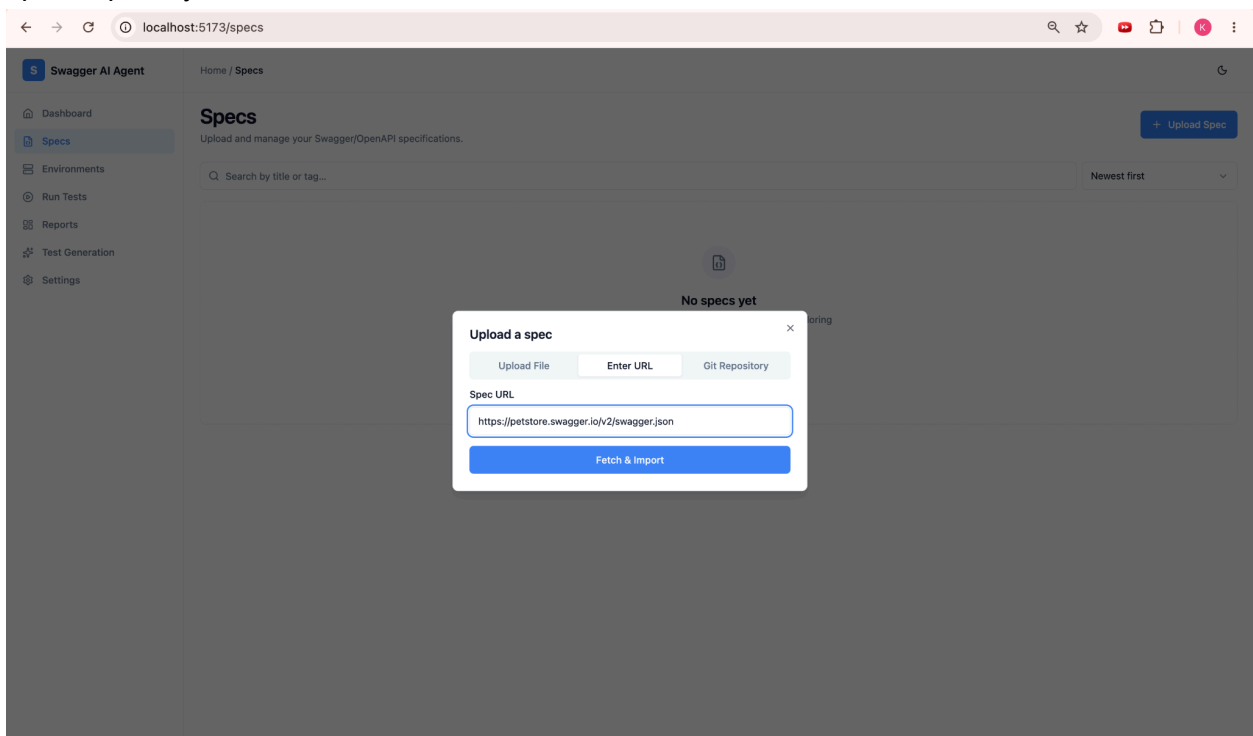

Swagger AI Agent

Home / Specs / Spec-d7bd597f-dc3b-44aa-82a2-842ca77a1741

Imported "https://petstore.swagger.io/v2/swagger.json"

Export Delete

Swagger Petstore

v1.0.7 · 20 operations · https://petstore.swagger.io/v2

pet store user

Operations Tags Environments Raw Spec

Search by path or summary...

All methods All tags

METHOD	PATH	SUMMARY	TAGS	ACTIONS
POST	/pet/{petId}/uploadImage	uploads an image	pet	ⓘ ⚙
POST	/pet	Add a new pet to the store	pet	ⓘ ⚙
PUT	/pet	Update an existing pet	pet	ⓘ ⚙
GET	/pet/findByStatus	Finds Pets by status	pet	ⓘ ⚙
GET	/pet/findByTags	Finds Pets by tags	pet	ⓘ ⚙
GET	/pet/{petId}	Find pet by ID	pet	ⓘ ⚙
POST	/pet/{petId}	Updates a pet in the store with form data	pet	ⓘ ⚙
DELETE	/pet/{petId}	Deletes a pet	pet	ⓘ ⚙
GET	/store/inventory	Returns pet inventories by status	store	ⓘ ⚙
POST	/store/order	Place an order for a pet	store	ⓘ ⚙

Setting up environment:

localhost:5173/environments?specId=spec-d7bd597f-dc3b-44aa-82a2-842ca77a1741

Swagger AI Agent

Home / Environments

Environments

Configure test environments and authentication.

Swagger Petstore

test

http://localhost:3000

API key Swagger Petstore

Create Environment

Swagger Petstore (v1.0.7)

Name

test

Description

Optional notes about this environment

Connection

Base URL

http://localhost:3000

Test Connection

Authentication

Authentication Type

API Key

Header Name

x-api-key

Header Value

.....

Default Headers

+ Add Header

Common headers

Cancel Save Changes

Run test:

Run Tests

Plan and execute API tests against your environments.

1 Select Spec

2 Choose Environment

3 Pick Operations

4 Review & Run

Choose which spec to test.

Swagger Petstore (v1.0.7) - 20 ops

< Previous

Next >

Run Tests

Plan and execute API tests against your environments.

✓ Select Spec

2 Choose Environment

3 Pick Operations

4 Review & Run

Pick the environment to run against.

●

test



https://localhost:3000

none

< Previous

Next >

The screenshot shows the Swagger AI Agent web interface. On the left is a sidebar with navigation links: Dashboard, Specs, Environments, Run Tests (highlighted), Reports, Test Generation, and Settings. The main content area is titled 'Home / Execution' and 'Run Tests'. It includes a sub-header 'Plan and execute API tests against your environments.' Below this is a workflow progress bar with four steps: 'Select Spec' (checked), 'Choose Environment' (checked), 'Pick Operations' (active, highlighted in blue with the number 3), and 'Review & Run'. Under the 'Pick Operations' step, there are three buttons: 'By Tag', 'By Endpoint', and 'Run All' (selected). A text line states 'Runs every operation in this spec (20).', followed by '20 operation(s) selected'. At the bottom left is a '< Previous' button, and at the bottom right is a 'Next >' button.

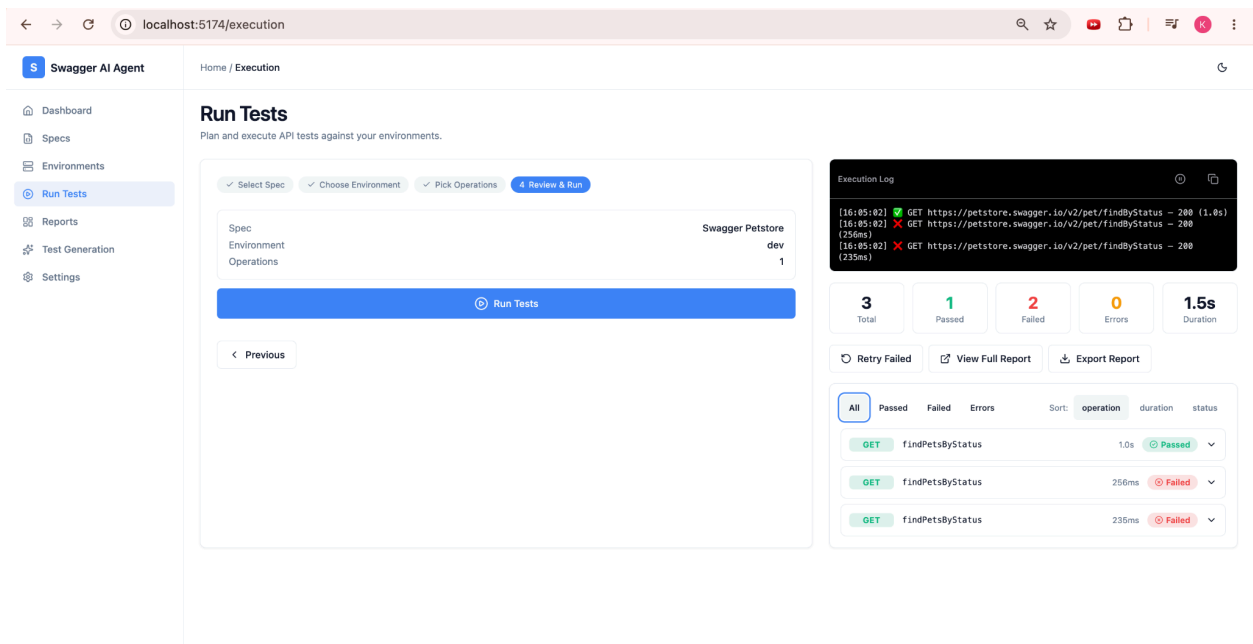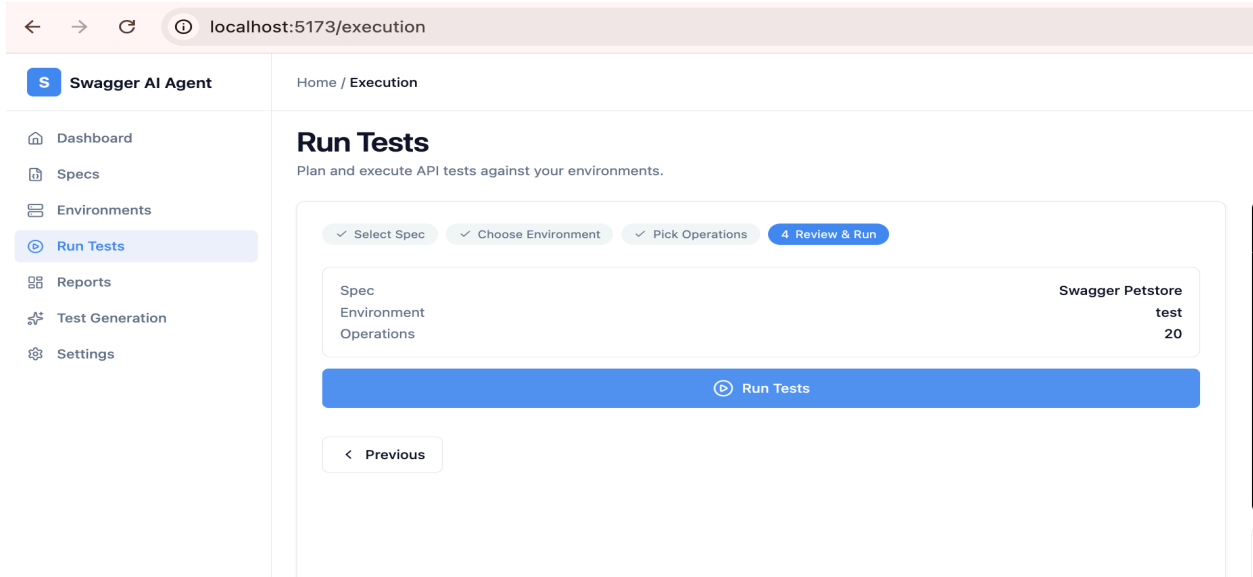

Swagger AI Agent

DashboardSpecsEnvironmentsRun TestsReportsTest GenerationSettings

Home / Testgen

Test Generation

Generate test code and sample payloads with AI assistance.

Spec Selection

Swagger Petstore (v1.0.7)

By TagBy EndpointAll

petstoreuser

Options

☒ Include negative tests

☒ Include auth tests

☒ Include boundary tests

Framework

Jest + Axios

Generate Tests

24 test case(s) generated

Download test.js

```
1  const axios = require('axios');
2
3  const baseUrl = process.env.API_BASE_URL || 'https://petstore.swagger.io/v2';
4
5  describe("Swagger Petstore (spec_4895798d_a688_4261_b47a_fc6ab9e83e2d)", () => {
6    describe("POST /pet/{petId}/uploadImage", () => {
7      it("POST /pet/{petId}/uploadImage returns a successful response", async () => {
8        const response = await axios.request({
9          method: "post",
10         url: `${baseUrl}/pet/${"sample"}/uploadImage`,
11         validateStatus: () => true,
12       });
13
14       expect(response.status).toBe(200);
15     });
16
17     it("POST /pet/{petId}/uploadImage rejects a request missing required fields",
18       const response = await axios.request({
19         method: "post",
20         url: `${baseUrl}/pet/${"sample"}/uploadImage`,
21         validateStatus: () => true,
22       });
23
24       expect(response.status).toBe(400);
25     });
26
27     it("POST /pet/{petId}/uploadImage rejects an unauthenticated request", async
28       const response = await axios.request({
29         method: "post",
```

Swagger AI Agent

DashboardSpecsEnvironmentsRun TestsReportsTest GenerationSettings

Home / Settings

Settings

Manage your preferences and app configuration.

Appearance

Choose how the app looks. Saved on this device.

Light

Dark

System

Regional

Used to format dates and times across the app.

Timezone

Asia/Calcutta

Date Format

MM/DD/YYYY

Execution Defaults

Remembered on this device for your convenience — the current backend always uses its own timeout per request.

Default timeout (seconds)

30

Notifications

Control which notifications you see.