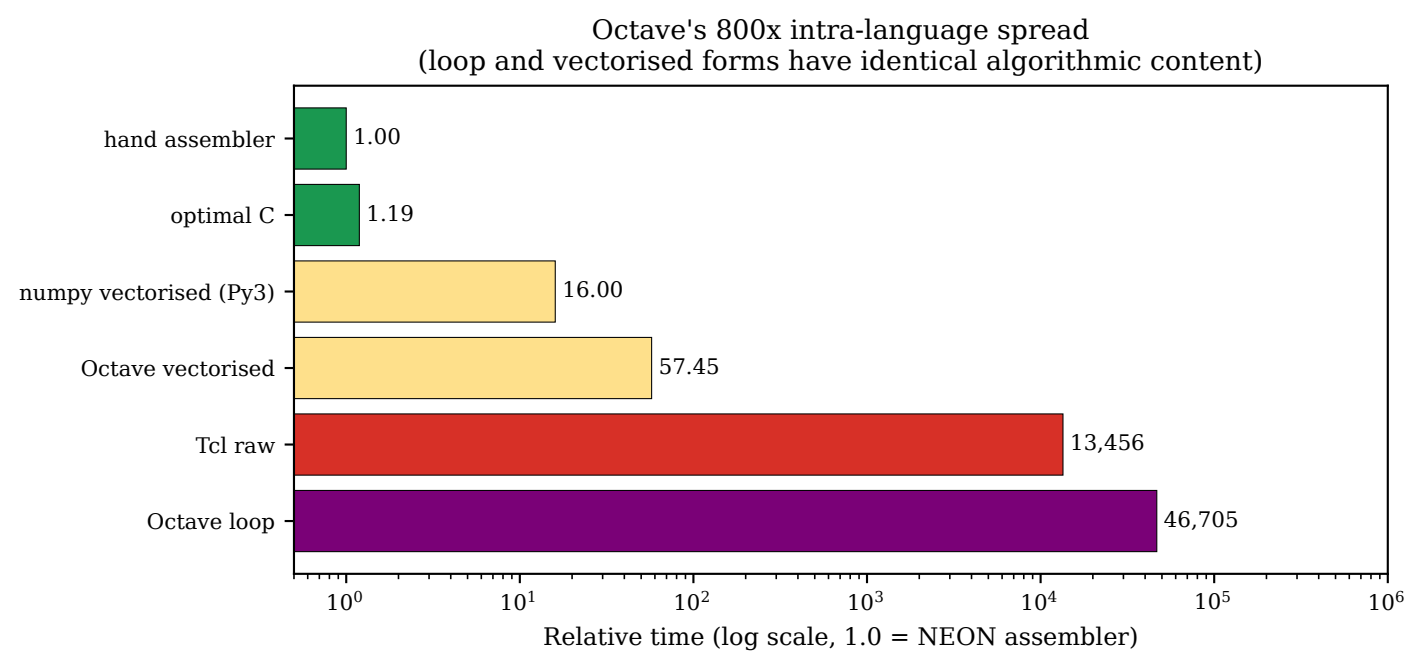
Octave's 800x intra-language spread
(loop and vectorised forms have identical algorithmic content)
hand assembler
optimal C
numpy vectorised (Py3)
Octave vectorised
Tcl raw
Octave loop
1.00
1.19
16.00
57.45
13,456
46,705
10^0
10^1
10^2
10^3
10^4
10^5
10^6
Relative time (log scale, 1.0 = NEON assembler)