
# Numbering parcels (TEMP_P_ID) >>Help

## folder location and subfolders :

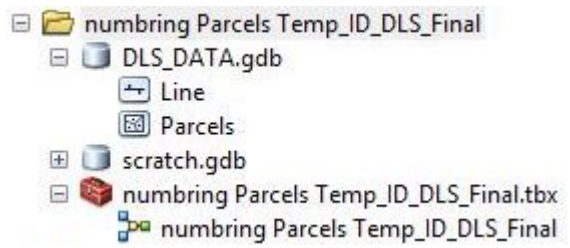


- Scratchworkspace.gdb: the default and scratch file Geodatabase in which ***the intermediate feature classes*** will be saved.

-Parcel_corners_coordinates_layout_tool.tbx

- DLS_DATA …

1-**Parcels** Feature class: the numbering will be in **TEMP_P_ID** field

2-**Line** Feature class: the line used to pick verticies in each parcel we want to number it.


## -Prerequisites:

1- Start Edit with any line feature class.

2- Zoom to the parcels which you want to number their **TEMP_P_ID** .

3- Draw a line and click inside each parcel you want to number it.


4- Use the tool by dragging the **line** feature class and the **Parcels** feature class and the **starting_number**.

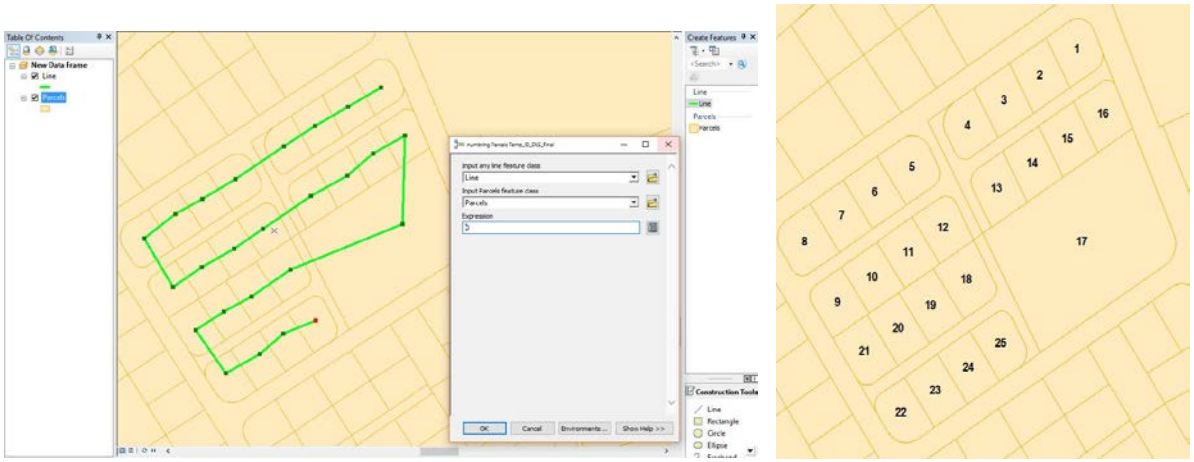

This figure show the parcels before using the tool and the results after running the tool.

6-Inside the Tool:


- Modify the tool environments (scratch and default Workspaces) from:
  Start edit a model…from (model) menu select (model properties) then click Environment tab…go to Workspace and put the path of (Scratchworkspace.gdb).
- The Output Coordinate System = The input Coordinate System

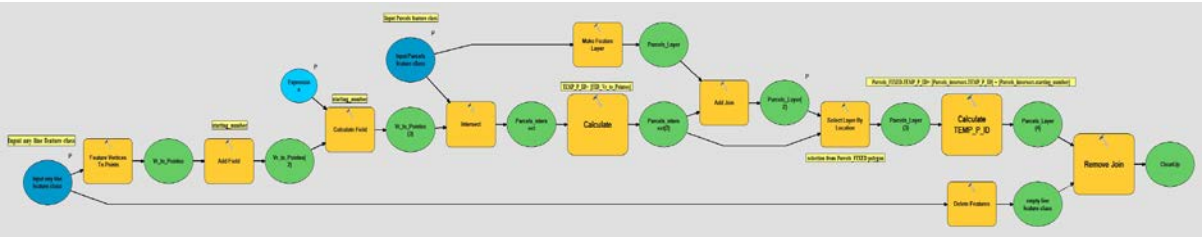


(numbering Parcels Temp_ID) Tool in ModelBuilder

***The Tool Step by step:***


**1-**

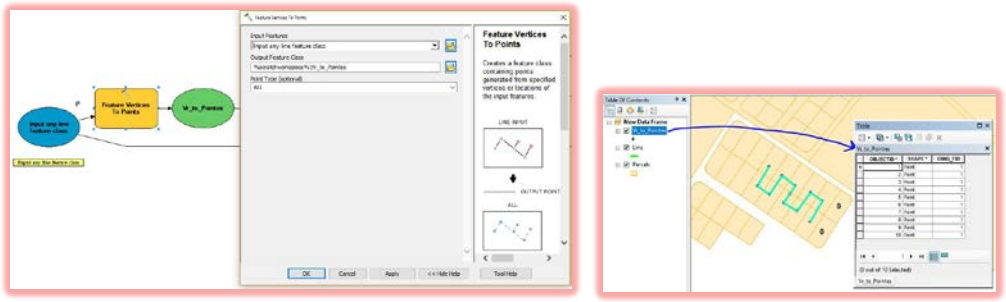


**2-**

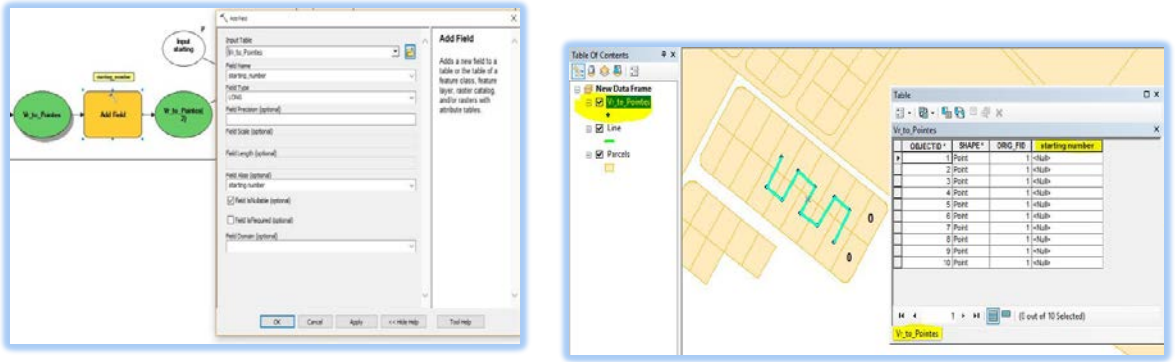


**3-**

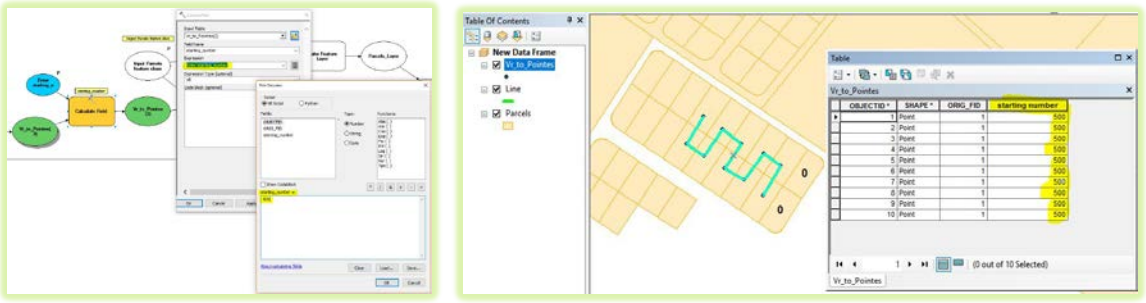


**4-**

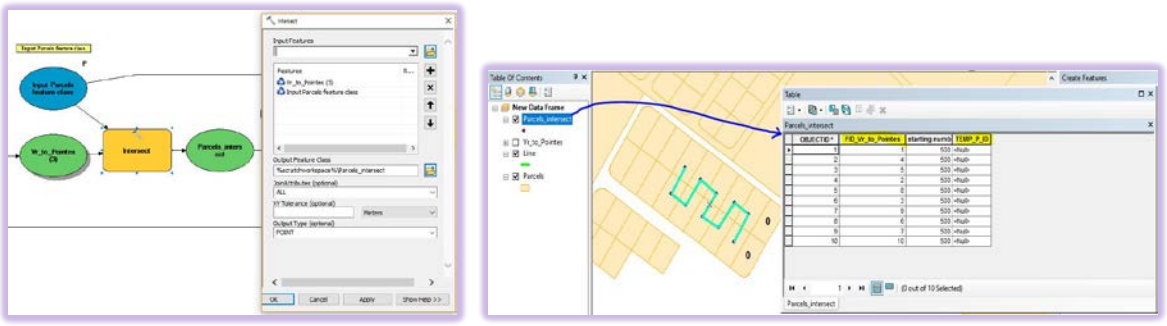



**5-**

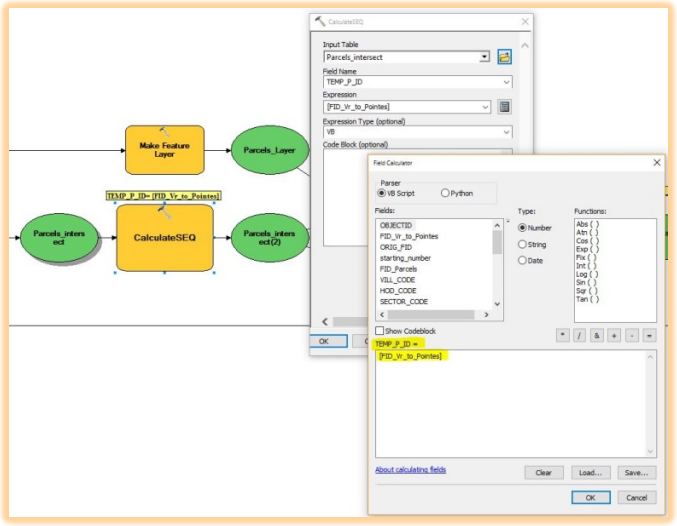

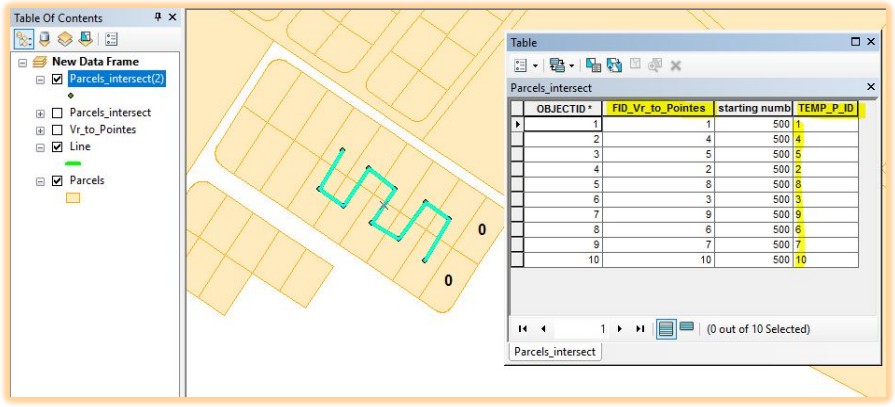


**6-**

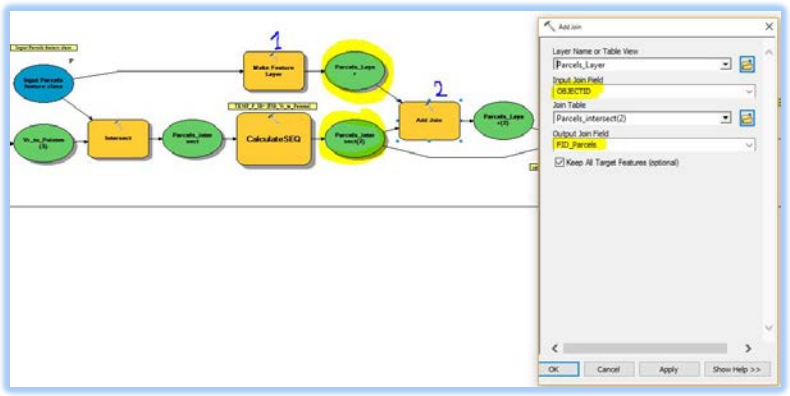

1
2
CalculateSEQ
Add Join
Layer Name or Table View
Parcels_Layer
Input Join Field
OBJECTID
Join Table
Parcels_intersect(2)
Output Join Field
FID_Parcels
Keep All Target Features (optional)
OK
Cancel
Apply
Show Help >>

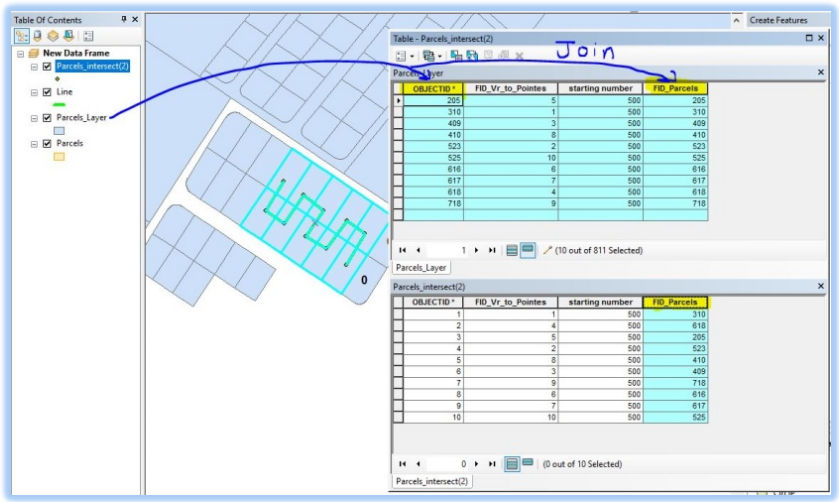

Table Of Contents
New Data Frame
Parcels_intersect(2)
Line
Parcels_Layer
Parcels
Join
Table - Parcels_intersect(2)
Parcels_Layer
OBJECTID * | FID_Vr_to_Pointes | starting number | FID_Parcels
205 | 5 | 500 | 205
310 | 1 | 500 | 310
409 | 3 | 500 | 409
410 | 8 | 500 | 410
523 | 2 | 500 | 523
525 | 10 | 500 | 525
616 | 6 | 500 | 616
617 | 7 | 500 | 617
618 | 4 | 500 | 618
718 | 9 | 500 | 718
(10 out of 811 Selected)
Parcels_Layer
Parcels_intersect(2)
OBJECTID * | FID_Vr_to_Pointes | starting number | FID_Parcels
1 | 1 | 500 | 310
2 | 4 | 500 | 618
3 | 5 | 500 | 205
4 | 2 | 500 | 523
5 | 8 | 500 | 410
6 | 3 | 500 | 409
7 | 9 | 500 | 718
8 | 6 | 500 | 616
9 | 7 | 500 | 617
10 | 10 | 500 | 525
(0 out of 10 Selected)
Parcels_intersect(2)

**7-**

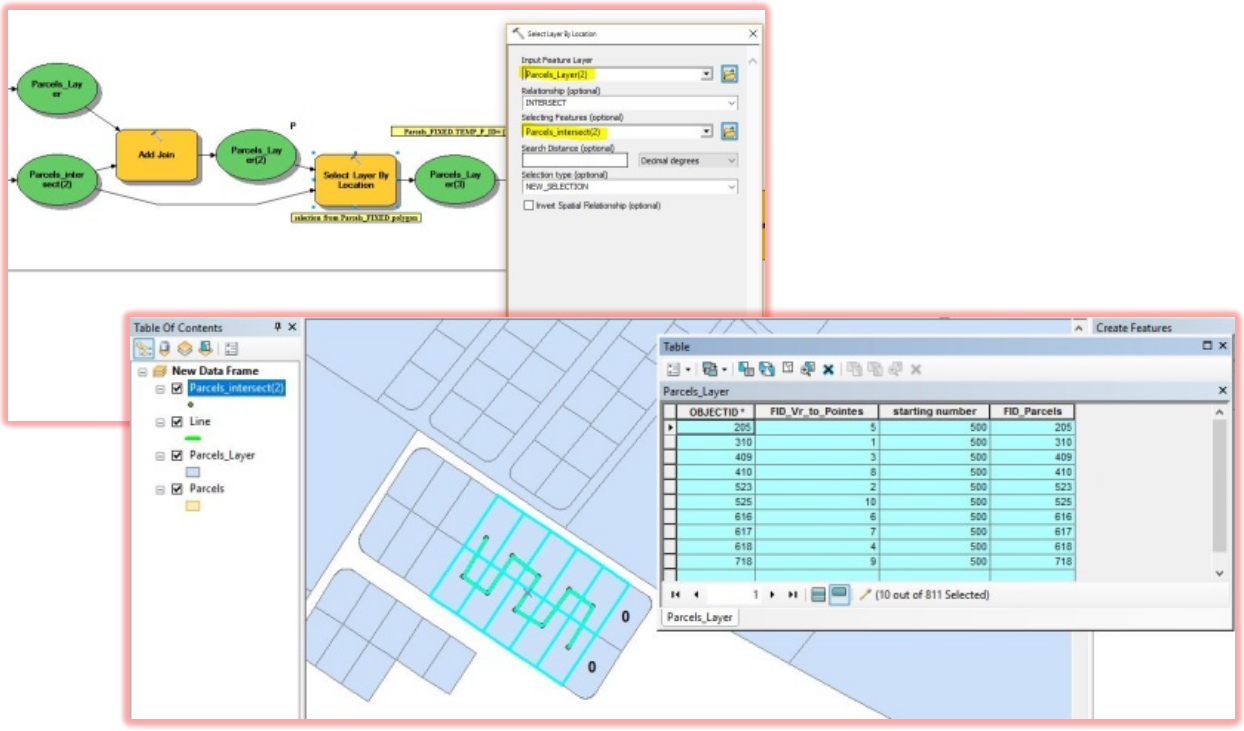

Add Join
Select Layer By Location
Input Feature Layer
Parcels_Layer(2)
Relationship (optional)
INTERSECT
Selecting Features (optional)
Parcels_intersect(2)
Search Distance (optional)
Selection type (optional)
NEW_SELECTION
Invert Spatial Relationship (optional)
Table Of Contents
New Data Frame
Parcels_intersect(2)
Line
Parcels_Layer
Parcels
Create Features
Table
Parcels_Layer
OBJECTID * | FID_Vr_to_Pointes | starting number | FID_Parcels
205 | 5 | 500 | 205
310 | 1 | 500 | 310
409 | 3 | 500 | 409
410 | 8 | 500 | 410
523 | 2 | 500 | 523
525 | 10 | 500 | 525
616 | 6 | 500 | 616
617 | 7 | 500 | 617
618 | 4 | 500 | 618
718 | 9 | 500 | 718
(10 out of 811 Selected)
Parcels_Layer

**8-**

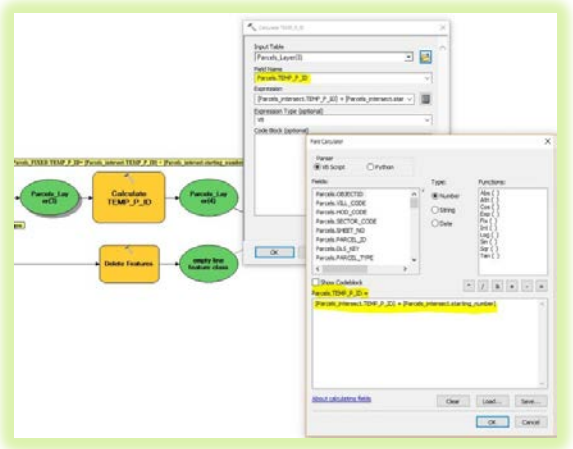

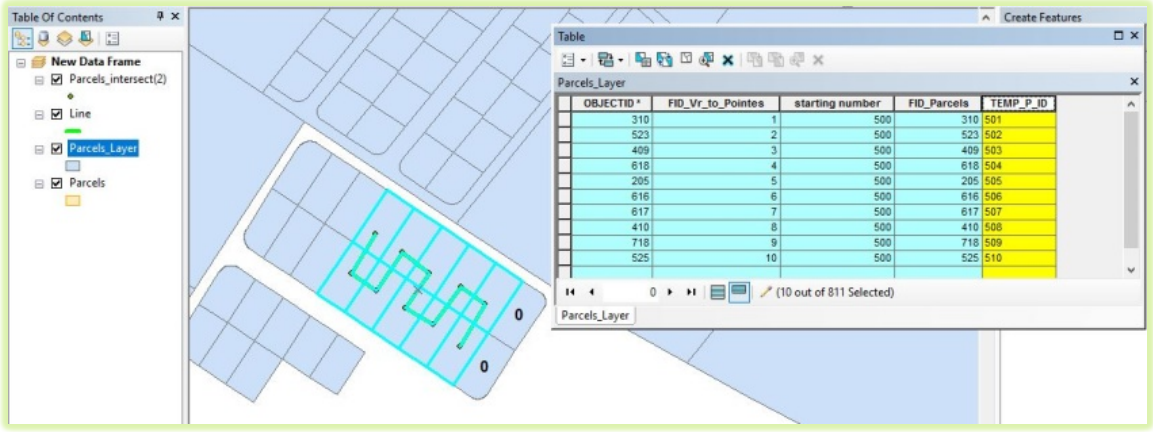
Table Of Contents
New Data Frame
Parcels_intersect(2)
Line
Parcels_Layer
Parcels
Create Features
Table
Parcels_Layer
OBJECTID *
FID_Vr_to_Pointes
starting number
FID_Parcels
TEMP_P_ID
310 1 500 310 501
523 2 500 523 502
409 3 500 409 503
618 4 500 618 504
205 5 500 205 505
616 6 500 616 506
617 7 500 617 507
410 8 500 410 508
718 9 500 718 509
525 10 500 525 510
(10 out of 811 Selected)
Parcels_Layer
0
0

**9-**

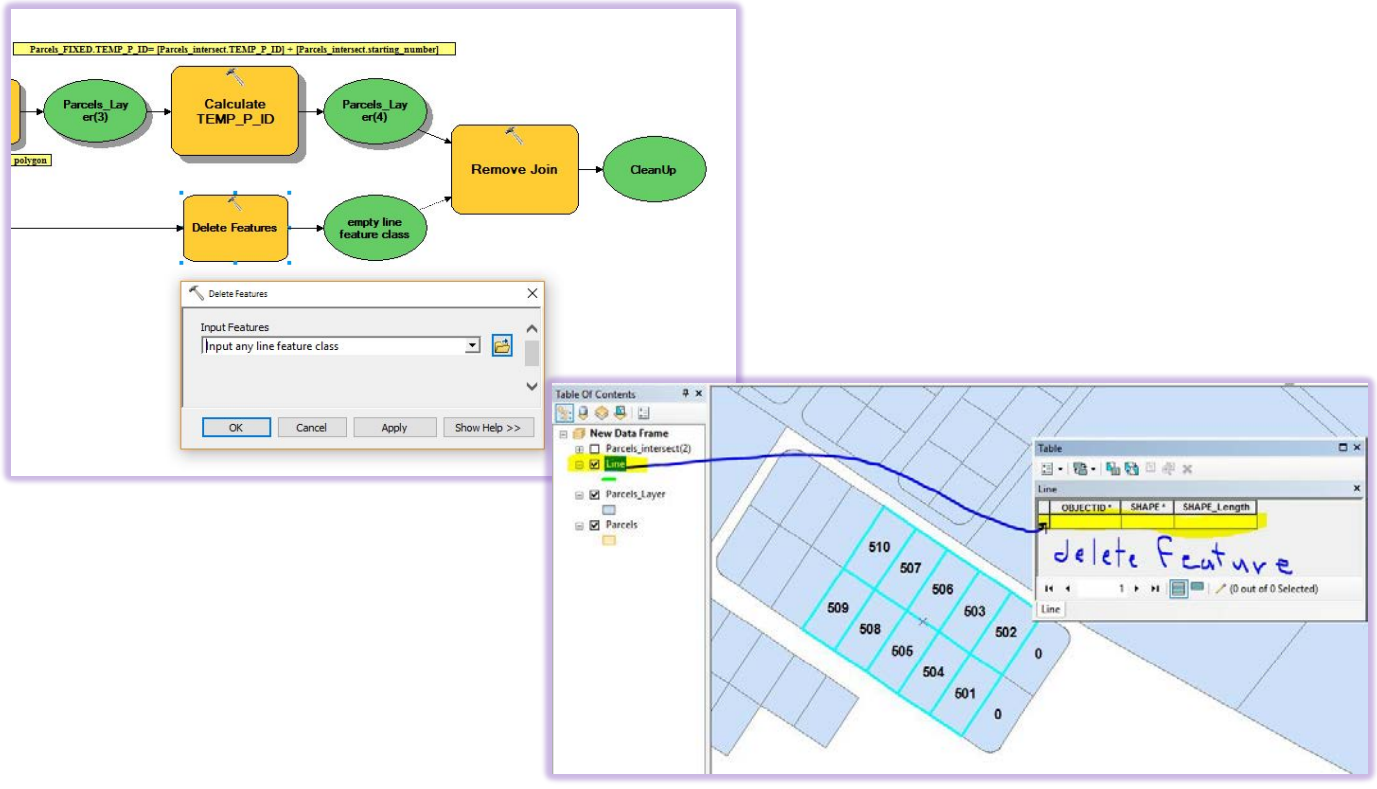
Parcels_FIXED.TEMP_P_ID= [Parcels_intersect.TEMP_P_ID] + [Parcels_intersect.starting_number]
Parcels_Layer(3)
Calculate TEMP_P_ID
Parcels_Layer(4)
Remove Join
CleanUp
Delete Features
empty line feature class
polygon
Delete Features
Input Features
Input any line feature class
OK
Cancel
Apply
Show Help >>
Table Of Contents
New Data Frame
Parcels_intersect(2)
Line
Parcels_Layer
Parcels
Table
Line
OBJECTID *
SHAPE *
SHAPE_Length
Delete Feature
(0 out of 0 Selected)
510
507
506
503
509
508
502
505
504
501
0
0