



per Text Markup La

websites → for shopping
for seeing movies
for finding sdp
booking tickets

In order to create these websites the basic need is HTML
(or) requirement

Hypertext markup language :- Applications :-

- * used to create webpages
- * user interfaces (screen/display)

Ex: webpages.

↳ color, size, background for look & feel

Requirements to implement HTML :-

- ① Editor (Text) / Note pad
- ② web Browser: chrome, opera, firefox
Ex
- ① is used for write the html tags
- ② used to implement the html code

Process to execute :- (only 3 steps)

- ① write html code in text editor
 - ② Save the file with extension .html (or) .htm
 - ③ open the file in web browser
- Indicates webpage not file

Note: for every file there is an extension

Ex:

- .c
- .py
- .doc → document file
- .txt
- .mp3/.mp4 → song files / multimeter files
- .mp4/.vob → video files
- .java

⑧ In html the code is return as html elements
we call them as html tags, by these tags we will
write the code

every html tag is represented in b/w $\begin{matrix} \text{HTML Tag} \\ \downarrow \\ < > \\ \text{L.D} \quad \text{G.D} \end{matrix}$

every html tag will be having start tag & end-tag
represented as $\begin{matrix} \downarrow & & \downarrow \\ <\text{tagname}> & | & </\text{tagname}> \end{matrix}$

main tag in html is $\begin{matrix} \text{start} \\ <\text{HTML}> \end{matrix}$
 $\begin{matrix} </\text{HTML}> \text{End Tag} \end{matrix}$

Basic html tags :-

website is a collection of webpages

In every website creation we will use these basic tags

Comment :- which is not executed by web Browser
inc compiler

syntax :-

$<!-- \text{comment} -->$
our comment

every html page is start with html tag

① HTML tag :-

$<\text{HTML}>$	S.T
$\begin{matrix} \text{---} \\ \text{---} \\ \text{---} \end{matrix} \}$	content
$</\text{HTML}>$	End tag

scripting used to create dynamic web pages
 client side server side
 time to time data will be modified X static web pages

② HEAD TAG

S.O.T E.O.T
 <head> </head>


③ TITLE TAG

<title> Hello </title>

explan. : sub tag of head tag
 ∴ written in head tag

write the title

Ex:

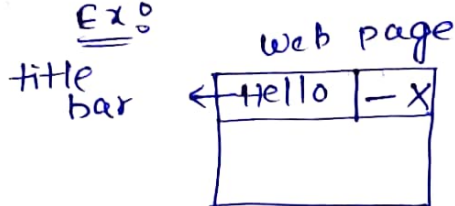


④ Body Tag

<body> </body>

displays actual content

in b/w we need to write the content

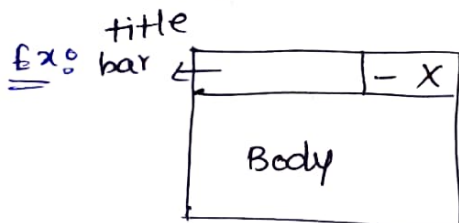


② ③ ④ tags should be write in html tag

Basic program in html :-

```
<html>
  <head>
    <title> Welcome </title>
  </head>
  <body> Hello friends </body>
</html>
```

output :-

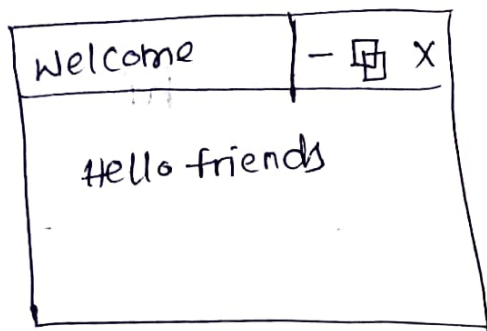

TAGs in b/w Body tag :-

formatting tags :-

Text $\rightarrow$ font (also called)
the tags applied on this font called formatting tags
(or)

⊗ Headings $\rightarrow$ $\overset{\text{Text}}{H_1, H_2, H_3, H_4, H_5, H_6} \rightarrow \overset{\text{S.O.T}}{\langle H1 \rangle} \overset{\text{E.O.T}}{\langle /H1 \rangle}$
 $\uparrow$
large size $\xrightarrow{\text{ding size}}$ small size

⊗ Font tag $\rightarrow \langle \text{Font} \rangle \langle / \text{Font} \rangle$

$\downarrow$
Consist of 3 attributes (shows/gives additional info)

$\rightarrow$ Face $\rightarrow$ style of text

$\rightarrow$ size

$\rightarrow$ colour

"

"

attributes should be return in starting tag itself.

source code :-

$\downarrow$
 $\langle \text{Font face} = \text{"TimesNew Roman"} \text{ size} = \text{"20"} \text{ color} = \text{"RED"} \rangle$

welcome to html

$\langle / \text{Font} \rangle$

3 colors

Red $\rightarrow$ 00 to FF

Green $\rightarrow$ 00 to FF

Blue $\rightarrow$ 00 to FF

$\text{color} = \# \text{FFFFFF}$
 black
 $\text{for hexadecimal format}$

$\text{color} = \#000000$

white color

$\text{R} + \text{G} + \text{B} \rightarrow \text{black}$

⊗ We can write the color name / it's hexadecimal format

→ Bold — `<B> hi </B>` → o/p : **hi**
text in dark

→ Italic — `<I> hi </I>` → o/p : *hi*
text tilted/slanted

→ Under line — `<U> hi </U>` → o/p : hi

in b/w whatever the text written it will be underlined

→ It is for every font tags

→ quotation — `<Q> hi </Q>` → o/p : "hi"

→ Break Row — `<br>` ?

hi `<br>` welcome

o/p : hi
welcome

There is no end tag for
break row tag

whatever the text after `<br>` it will be print in next
line

→ strike — `<Strike> hi </strike>` o/p : ~~hi~~
text will be strike off

→ strong — `<strong> hi </strong>` o/p : **hi**
text almost equal to bold

→ small — `<small> </small>`
text will be small when compared
with remaining text

Exo `hi <small> welcome </small>`

o/p : hi welcome (reduced size)

→ delete - `<del>` hi `</del>` o/p: ~~hi~~


text almost equal to strike

→ Abbreviation - `<abbr>` `</abbr>`

have 1 attribute

↓
title

`<abbr title="water">` H₂O `</abbr>`



whenever the pointer points the tool tip will displayed

→ data bidirectional override (mirror image)

displaying the text from left to right / right to left

`<db>` `</db>`

have one attribute

① dir represents the text from L to R / R to L

source code :-

`<db>` dir = "ltr" `>` hi `</db>`

o/p: hi

`<db>` dir = "rtl" `>` hi `</db>`

o/p: ih

dir → ltr (left to right)
 → rtl (right to left)

→ subscript → H₂O → `<sub>` `</sub>`

for writing H₂O

H `<sub>` 2 `</sub>` O → o/p: H₂O

→ superscript → for writing x²

x `<sup>` 2 `</sup>` → o/p: x²

* LISTS :-

Ordered & Unordered list :-

Lists

Un-Ordered
in which list
x data/items are represented
using symbols

in html, have

circle → ○

Disc → ●

square → ■

none →

Ex: * CSE
* ECE
* MECH

Ordered
List

using numbers, alphabets,
roman numbers etc.

Ex: 1, 2, 3 ---
A, B, C ---
a, b, c ---
I II III ---
i ii iii ---

Syntax for creating unordered list :-

```
<UL style="list-style-type: circle" >
<LI> CSE </LI>
<LI> ECE </LI>
<LI> EEE </LI>
</UL>
```

UL - unordered list

LI - List item

Syntax for creating ordered list :-

```
<OL type="A">
<LI> CSE </LI>
<LI> ECE </LI>
<LI> EEE </LI>
</OL>
```

we can apply the ^{tags}formattings in b/w $\langle L_i \rangle$ & $\langle /L_i \rangle$

creating table :- for which we have table tag
table consist of no. of rows & no. of columns

Tag :- the text which is enclosed b/w $\langle \rangle$ symbols.

Ex:- $\langle \text{Table} \rangle$

	columns		
rows {	data	data	data
	-	-	-
	-	-	-

TR - table row

TD - table data

_{cr}
indirectly indicates columns

source code for creating a table :-

$\langle \text{Table} \rangle$

$\langle \text{TR} \rangle$

$\langle \text{TD} \rangle \text{Data1} \langle / \text{TD} \rangle \rightarrow 1^{\text{st}} \text{column}$

$\langle \text{TD} \rangle \text{Data2} \langle / \text{TD} \rangle \rightarrow 2^{\text{nd}} \text{column}$

$\langle \text{TD} \rangle \text{Data3} \langle / \text{TD} \rangle \rightarrow 3^{\text{rd}} \text{column}$

$\langle / \text{TR} \rangle$

$\langle \text{TR} \rangle$

$\langle \text{TD} \rangle \text{Data4} \langle / \text{TD} \rangle$

$\langle \text{TD} \rangle \text{Data5} \langle / \text{TD} \rangle$

$\langle \text{TD} \rangle \text{Data6} \langle / \text{TD} \rangle$

$\langle / \text{TR} \rangle$

$\langle / \text{table} \rangle$

(✓)

O/P:-

data1	"2"	"3"
"4"	"5"	"6"

Data1 D2 D3
D4 D5 D6

* Attribute gives some additional info to the existing tag

Inorder to get the boarder we use boarder attribute in the table tag

change the 1st line be like this

<Table Border = "2"> ↗ size of border

O/p:

D1	D2	D3
D4	D5	D6

Inorder to creat the caption for the table, we have caption tag <caption>

use this <caption> tag above the ^{1st} <TR> tag

<caption> sample table </caption>

O/p:

sample table

D1	D2	D3
D4	D5	D6

if we use <caption> above <TR> the caption will be displayed on the centre above the table

merging 2 columns :-

O/p:

D1	D2	D3
	D4	D5

colspan :- no. of columns we want to merge

Ex: colspan = "2"

↳ It is an attribute of <TD> tag

source code :-
<Table>

<TR>

<TD colspan = "2"> Data 4 </TD>

<TD> Data 5 </TD>

</TR>

</Table>

O/p :-

Data 4	Data 5
--------	--------

try for this O/p :- ①

D1	D2	D3
D4	D5	

sol :- <TD> D4 </TD>

<TD colspan = "2"> D5 </TD>

merging rows :-

use attribute Rowspan = "2"

source code :-

<table border = "2">

<caption> sample table </caption>

<TR>

<TD rowspan = "2"> Data 1 </TD>

<TD> Data 2 </TD>

<TD> Data 3 </TD>

</TR>

<TR>

<TD> Data 4 </TD>

<TD> Data 5 </TD>

</TR>

</Table>

By defaultly it
will merge the ② rows
blindly

--	--	--

O/p :-

D1	D2	D3
D4	D5	

<TH> tag :- The bold will be applied

TH → table head

we can use <TH> tag instead of <TD>, if we use <TH> tag the data will be like bold at max. it is use for header of the table only

header		

⊗ these attribute can be used in every tags at max.

General purpose Attributes :- (these can useful in javascript also)

→ ID :- for every tag there will be id
unique identity for the element

→ class :- represent an element but not unique
multiple elements can have same class & 1 class can have multiple elements.

→ title - gives tool tip for given data
text in rectangular shape

text → tool tip below the cursor

if the cursor points the word, the tool tip will be open

consist of like abbreviation

like self documentation

→ style ← applying css (cascading style sheets)

inline style sheets

In order to give the beautification for text

⊗ We will go deeply about them in javascript.

few more tags in html :-

→ IMAGE :- `<IMG>`

to display the image on the web browser

Attributes of `<IMG>` tag :-

`SRC` - source - where the image located.

`Alt` - Alternate → (in the form of text)
if there is any difficulty in displaying the image on the web browser.

`width` - width of image to be displayed on web browser / screen & it must be pixels

`height` - height of image & must be in pixels

`Align` - alignment of image ~~in~~ left/right

It is not worked on HTML 5

Source code for `<IMG>` tag :-

```
<IMG SRC = "D:\hello.jpg" Alt = "Hello" WIDTH = "300"  
HEIGHT = "300" ALIGN = "RIGHT" >
```

→ ANCHOR Tag :- `<a>` `</a>`

It is used to set the hyperlinks for existing text.

& used to redirecting from present webpage to another webpage through hyperlinks

Attributes of `<a>` tag :-

`href` = hyperlink reference be
target webpage to displayed (which page should be displayed)

`title` → for tooltip by pointing hyperlink tooltip will be opened.

target → where to be displayed i.e. in the
same page (or) another page
window (or) new window
(or) tab (or) tab

target = new (in new page)

Frame number

parent (in same page)

If we don't give anything by default it will be open
in same page

Sample code for hyperlink :-

`<a href = "http://www.Youtube.com" > Youtube </a>`

Target = new

this webpage will be open
when we click Youtube
hyperlink.

→ MARQUEE tag :- `<marquee>` `</marquee>`


`<marquee>` - moving text (used for)
(or)
animated text

i.e. moving from either L to R (or) T to bottom

Attributes :-


behaviour $\begin{cases} \text{scroll} \quad (\text{text moves in Unidirectional}) \\ \text{Alternate} \quad (|| \text{ bidirectional}) \end{cases}$

window ①

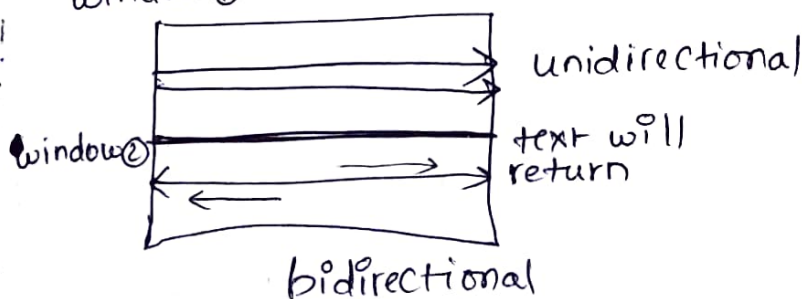

bgcolor - background color

In this background color either text will moving from L to R (or) T to Bottom



height :- what is the height for the text (or) animated text

it can be either in % (or) pixels

loop :- how many times the text will be moved (or) No. of times

Ex: if loop = 2 $\Rightarrow$ it will moved to times

if it is scroll

if it is Alternate



2 time text will move

(*) if no behaviour attribute is mentioned by defaultly it will move in unidirectional & then the loop attribute will be infinity (in this case only)


few elements of forms tag :- (part-1)

FORMS

Ex: Registration form
login form

We know that R.F contains (may) these type of symbols :-



① text box



② radio Buttons

③ checkbox

④ text area

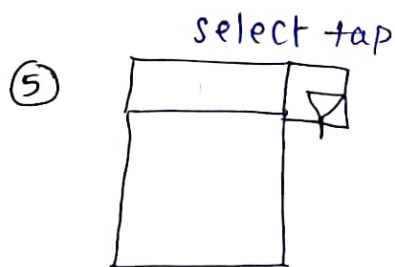

All these symbols will cover under forms tag

→ text boxes

→ Radio

→ check box

→ Text area

→ select

→ Buttons

Text boxes :- ② types of text boxes are there

① Type (Text boxes)

```
<input type = "text" name = "fname" value = "enter  
name" size = "15" maxsize = "20">
```

o/p

② 2nd Type (password boxes)

```
<input type = "password" name = "fname" value = "ent  
password" size = "15" maxsize = "20">
```

o/p

size → size of text

max size : max. no. of characters in the text box

Radio buttons :-

representation Radio button is circle

Ex: Gender ✓
☐ male

☐ Female

It is the feature of Radio button

If we press one button other buttons will be disabled.

sample code :-

(group everything under single name)

property
↓

male <input type = "radio" name = "gender" checked>

female <input type = "radio" name = "gender">

o/p: gender
☒ male
☐ female

which selects only one radio button among more

Check box :- If want to select multiple elements we use this check box

Ex: one person can have multiple hobbies

Hobbies

☐ singing

☐ playing

☐ Reading

☐ painting

source code

<input type = "checkbox" name = "hobbies" checked> singing


<input type = "checkbox" name = "hobbies" checked> playing

Text area :- is used for taking the address
from the user
→ It will take multiple line i/p.

sample code :-

```
<textarea rows = "5" cols = "20">  
</textarea>
```

o/p



it will create the text area with 5 rows & with 20 columns

few more form elements (part-2) :-

select :- <select>

used for selecting (or) more choices (or) courses

* size attribute :- no. of elements to displayed

* by default the size will be zero


scroll bar is used in order to get the remaining elements

option attribute :- is used to create options

sample code :-

```
<select size = "4">  
<option> c </option>  
<option> C++ </option>  
<option> python </option>  
<option> java </option>  
</select>
```


o/p

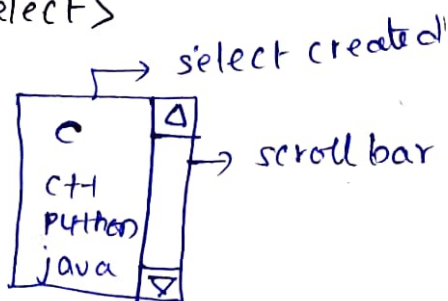

file upload :- it is used for uploading/modifying the files/images/certificates in the web pages.

accept attribute :- which_x should accepted i.e file
image file/text file etc.

<input type = "file" name = "file" accept = " " >
(optional)
attribute
→ to group all the elements

O/P :  no file choosen

if we click it will ask the user to choose a new file

Buttons :- after filling all the forms we need to submit the forms, the submit button is an Ex. of buttons.

types of button, there are 4 types

- 1) submit button
- 2) reset :- if it is used when there mistakey in filling the forms, if we click reset button simply all forms (details) will clear,
- 3) customized button :-
- 4) image buttons :-

accept attribute :- which_x should accepted i.e
image file/text file etc.

image file/text file etc.

`<input type = "file" name = "file" accept = " " >`

↳ to group all the elements

↑
(optional)
attribute

o/p choose file no file choosen

if we click it will ask the user to choose a new file

Buttons :- after filling all the forms we need to submit the forms, the submit button is an Ex. of buttons.

types of button, there are 4 types

1) submit button

- 1) submit button
- 2) reset : it is used when there are mistakes in filling the forms, if we click reset button simply all forms (details) will clear.

3) Customized button :-

4) image buttons :-

Sample code :-

```
<input type="submit" name="button" value="submit">  
<input type="reset" name="button" value="Reset">  
<input type="Button" value="click">  
<input type="image" src="" >
```

O/P :-

submit

Reset

click




image button created
we click it is redirecting
to somewhere

FRAMES in html :-

frames is used to divided complete webpage into diff. section/windows, so that each section can load a separate html file

- we can divide the webpages into both rows & columns
- so that we can upload multiple webpages in a single browser

Ex :-

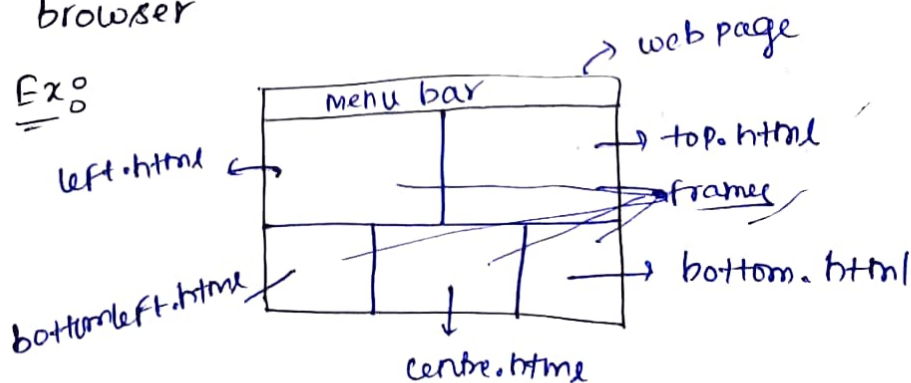


⊗ By using `<frameset>` tag is used to divide the webpage into either rows/columns
src :- which html file/page should be loaded here (in frames)


sample code :

`<frameset rows = "50%, 50%">`
↑ 1st argument ↑ 2nd
`<frame src = "location of html page" name = "F1">` frame1
`<frame src = " " name = "F2">` frame2
`</frameset>`


o/p :

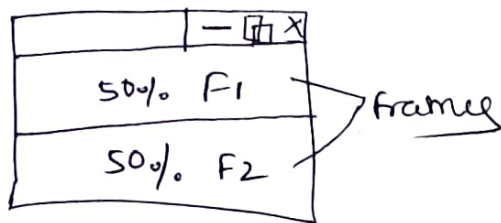

for : cols = "50%, 50%" ⇒ o/p :




Q :

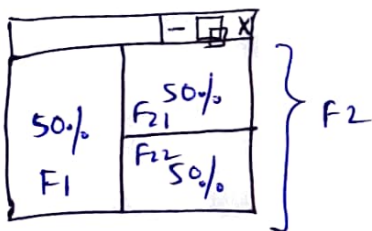

sample code :

`<frameset cols = "50%, 50%">`
`<frame src = "location of html page" name = "F1">`
`<frameset rows = "50%, 50%">`
`<frame src = " " name = "F21">`
`<frame src = " " name = "F22">`
`</frameset>`
`</frameset>`


Q :



`<frameset rows = "20%, 50%, 30%"`
`border = "0">`
 then there will be no boarder -

Application :- Creation of webpage :-

problem :-



now we need to create the
webpages for { home
courses
contact
about }

it is like project :-