d=5 GRU decoder: reset_after=False vs reset_after=True

reset_after=False, 3 seeds (seed 0, seed 1, seed 2) reset_after=True, 2 seeds (seed 0, seed 1)

(a) Training loss

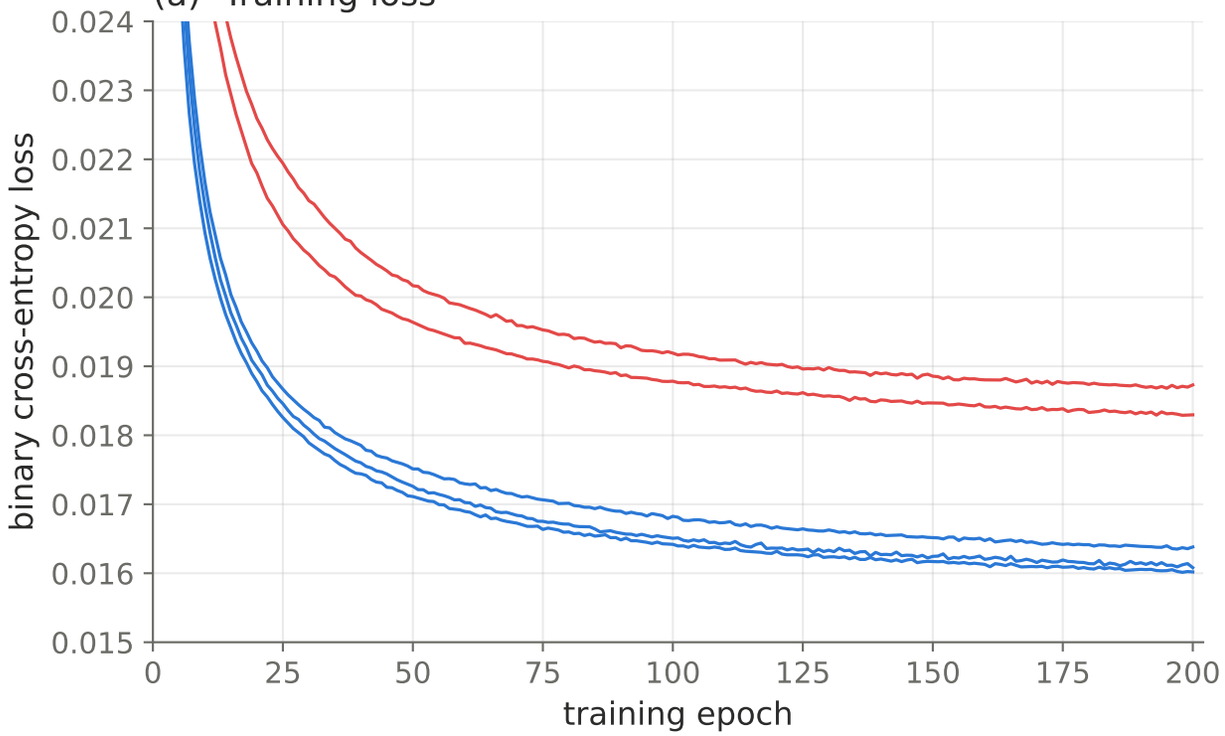

(b) Validation loss

(c) Validation logical error rate

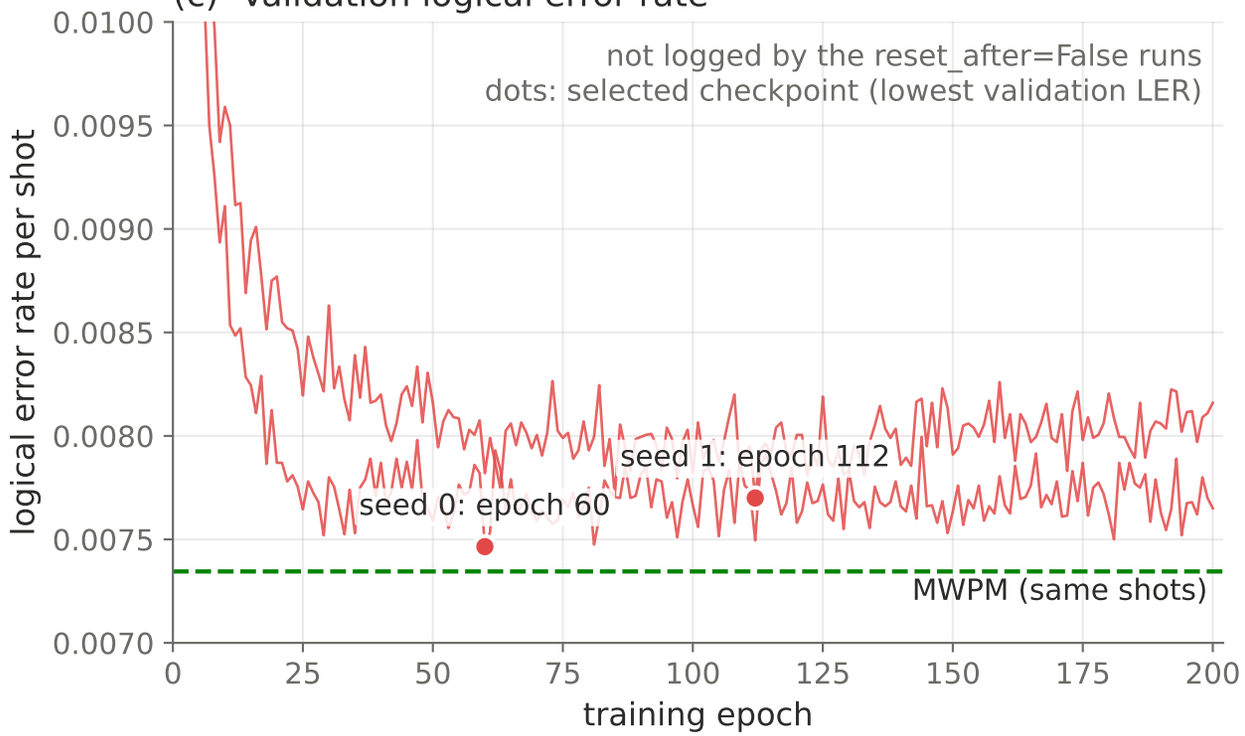
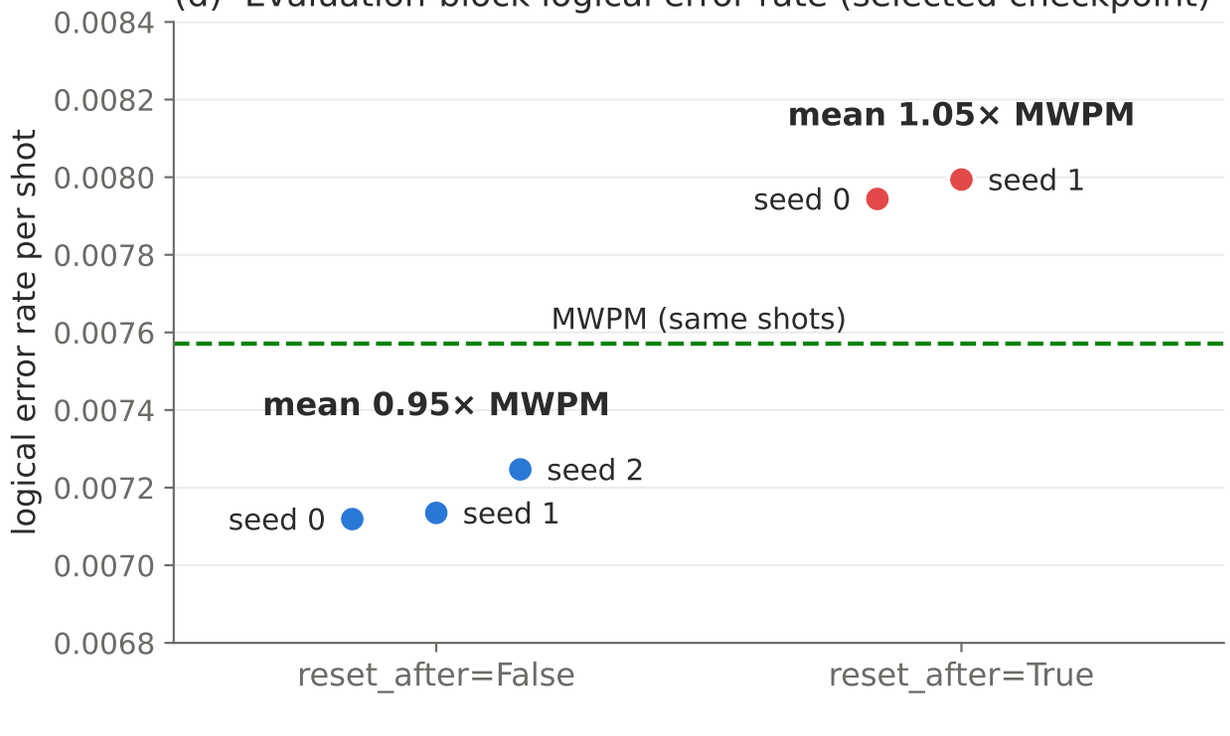
(d) Evaluation-block logical error rate (selected checkpoint)