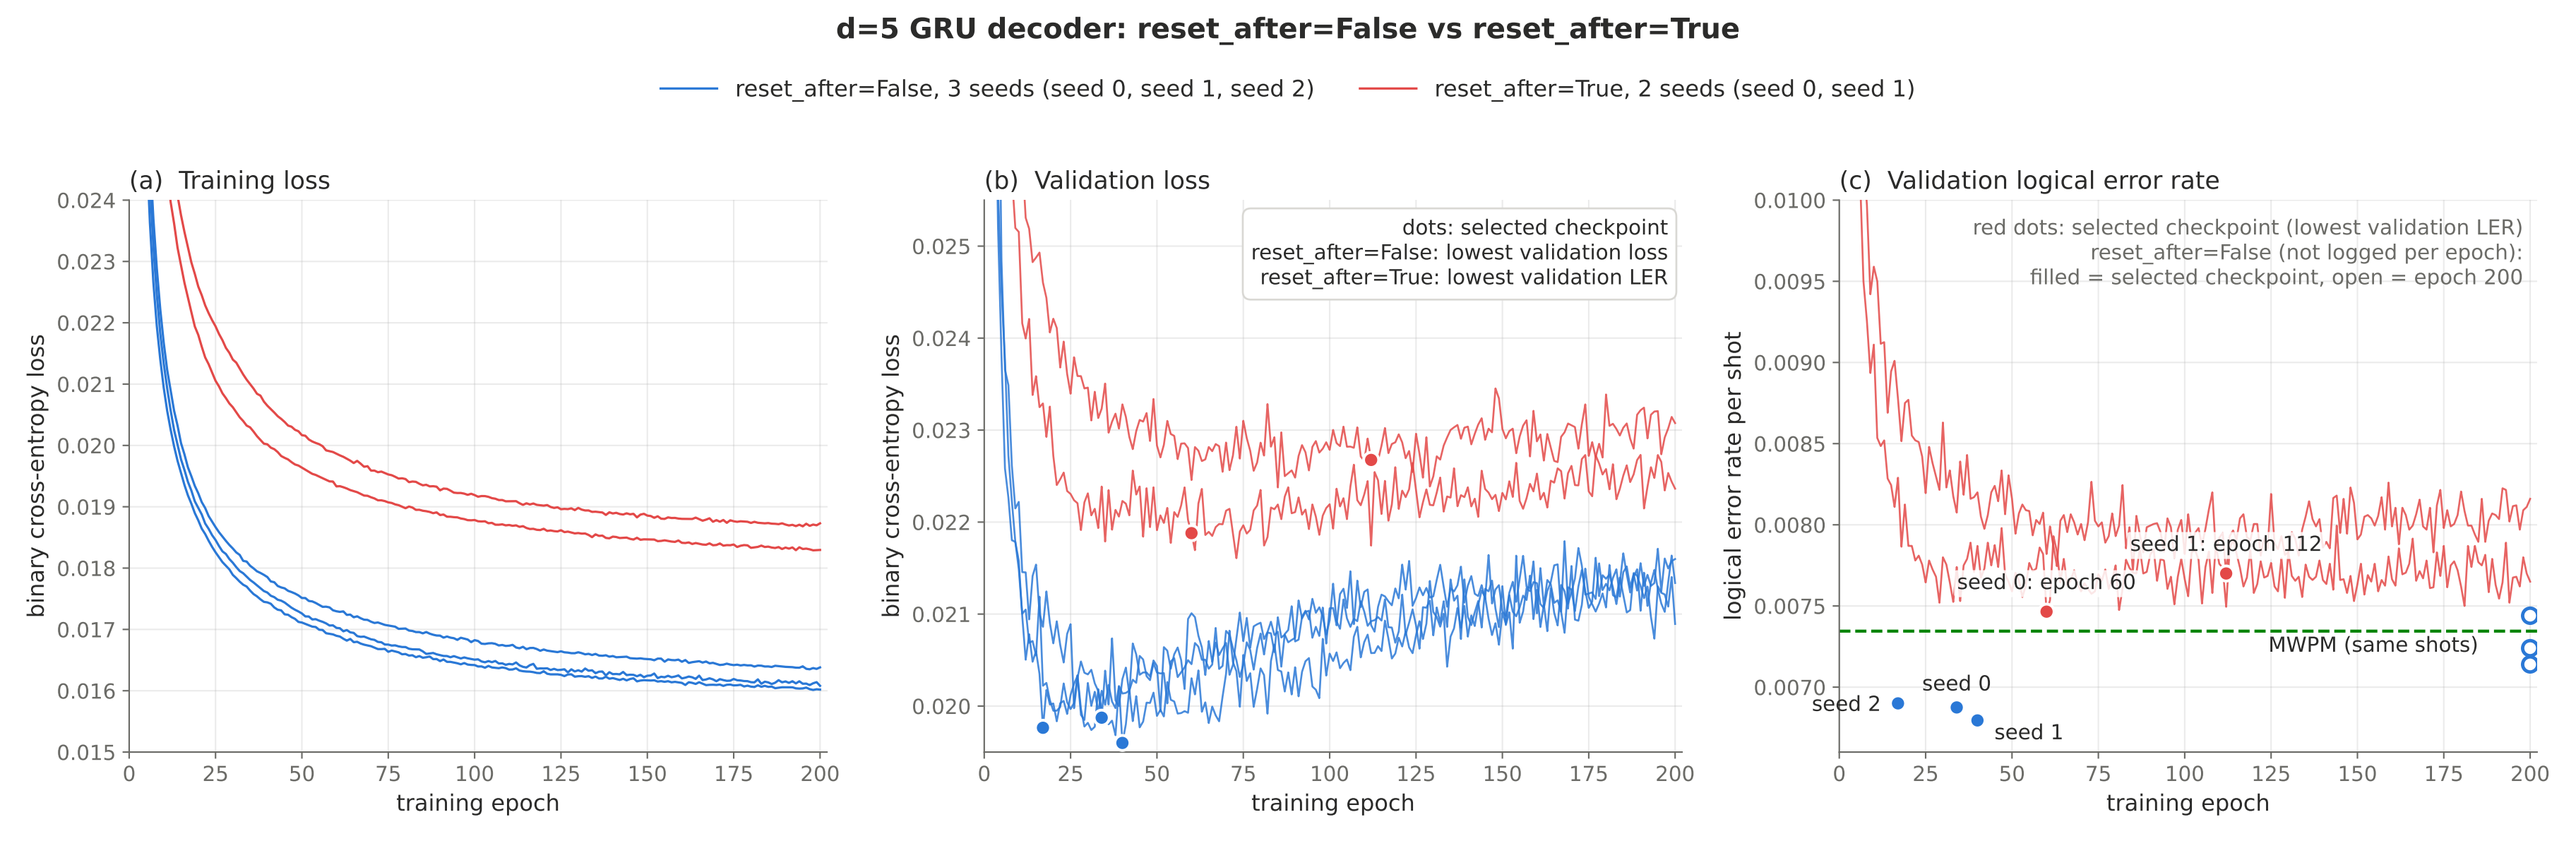
d=5 GRU decoder: reset_after=False vs reset_after=True
reset_after=False, 3 seeds (seed 0, seed 1, seed 2)
reset_after=True, 2 seeds (seed 0, seed 1)
(a) Training loss
binary cross-entropy loss
training epoch
(b) Validation loss
dots: selected checkpoint
reset_after=False: lowest validation loss
reset_after=True: lowest validation LER
binary cross-entropy loss
training epoch
(c) Validation logical error rate
red dots: selected checkpoint (lowest validation LER)
reset_after=False (not logged per epoch):
filled = selected checkpoint, open = epoch 200
seed 1: epoch 112
seed 0: epoch 60
MWPM (same shots)
seed 0
seed 2
seed 1
logical error rate per shot
training epoch