

**Exp No: 5**

**Date:**

## **DESIGN A DESK CALCULATOR USING LEX TOOL**

**AIM:**

To check whether the arithmetic expression using lex and yacc tool.


**ALGORITHM:**

- Using the flex tool, create lex and yacc files.
- In the C include section define the header files required.
- In the rules section define the REGEX expressions along with proper definitions.
- In the user defined section define yywrap() function.
- Declare the yacc file inside it in the C definitions section declare the header files required along with an integer variable valid with value assigned as 1.
- In the Yacc declarations declare the format token num id op.
- In the grammar rules section if the starting string is followed by assigning operator or identifier or number or operator followed by a number or open parenthesis followed by an identifier. The x could be an operator followed by an identifier or operator or no operator then declare that as valid expressions by making the valid stay in 1 itself.
- In the user definition section if the valid is 0 print as Invalid expression in yyerror() and define the main function.

## **LEX AND YACC WORKING:**

Parser generator:

- Takes a specification for a context-free grammar.
- Produces code for a parser.

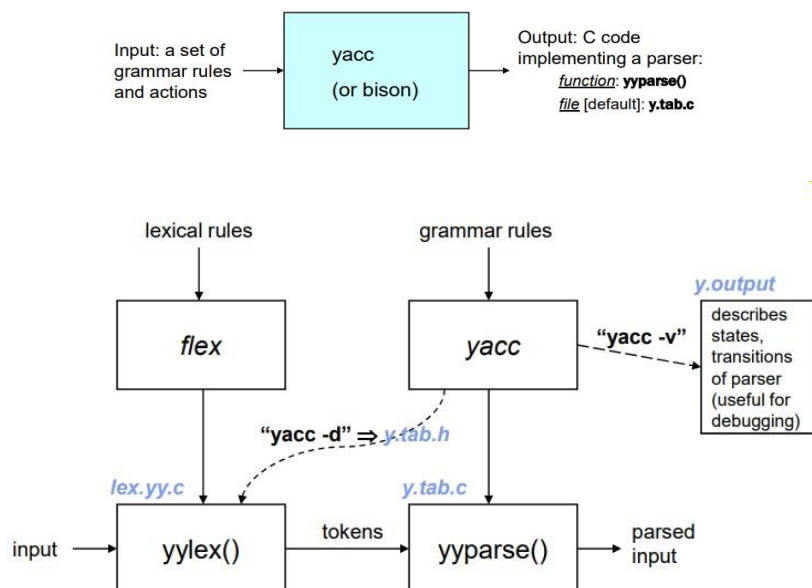

Roll Number: 210701107

Name: S.Karthic

## PROGRAM:

### cdlab5.l:

```
%{  
    #include "y.tab.h"  
%}  
  
%%  
  
[a-zA-Z_][a-zA-Z_0-9]* return id;  
  
[0-9]+(\.[0-9]*)?    return num;  
  
[+/*]                return op;  
  
.                    return yytext[0];  
\n                    return 0;  
%%
```

```
int yywrap(){  
    return 1; }  
cdlab5.y:
```

```
%{  
  
    #include<stdio.h>  
    int yylex();    int  
    yyerror();  
    int valid=1;  
  
%}
```

```
%token num id op
```

```
%%  
start : id '=' s  
';' s :    id x  
        | num x  
        | '-' num x  
| '(' s ')' x  
; x :    op s  
        | '-' s  
        |  
        ;  
%%
```

Roll Number: 210701107

Name: S.Karthic

```

int yyerror(){    valid=0;
printf("\nInvalid expression!\n");
return 0;
} int
main(){
    printf("\nEnter the expression:\n");
    yyparse();    if(valid){
printf("\nValid expression!\n");
    }}

```

### OUTPUT:

```

(kali㉿kali)-[~/Documents/cdlab]
$ vi cdlab5.y

(kali㉿kali)-[~/Documents/cdlab]
$ yacc -d cdlab5.y

(kali㉿kali)-[~/Documents/cdlab]
$ vi cdlab5.l

(kali㉿kali)-[~/Documents/cdlab]
$ lex cdlab5.l

(kali㉿kali)-[~/Documents/cdlab]
$ gcc lex.yy.c y.tab.c

(kali㉿kali)-[~/Documents/cdlab]
$ ./a.out

Enter the expression:
a=b

Invalid expression!

(kali㉿kali)-[~/Documents/cdlab]
$ ./a.out

Enter the expression:
a=b;

Valid expression!

```

### RESULT:

Thus, a program to check whether the arithmetic expression using lex and yacc tool is implemented.