Date: 06/11/2024 **Exp No: 11**

HADOOP

IMPLEMENT THE MAX TEMPERATURE MAPREDUCE PROGRAM TO IDENTIFY THE YEAR WISE MAXIMUM TEMPERATURE FROM SENSOR

DATA AIM:

To implement the Max temperature MapReduce program to identify the year-wise maximum temperature from the sensor data.

DESCRIPTION:

Sensors senses weather data in big text format containing station ID, year, date, time, temperature, quality etc. from each sensor and store it in a single line. Suppose thousands of data sensors are there, then we have thousands of records with no particular order. We require only a year and maximum temperature of particular quality in that year.

For example:

Input string from sensor:

0029029070999991902010720004+64333+023450

FM-12+

000599999V0202501N02781999999N0000001N9-00331 +

99999098351ADDGF1029919999999999999999

Here: 1902 is year

0033 is temperature

1 is measurement quality (Range between 0 or 1 or 4 or 5 or 9)

Here each mapper takes the input key as "byte offset of line" and value as "one weather sensor read i.e one line". and parse each line and produce an intermediate key "year" and intermediate value as "temperature of certain measurement qualities" for that year. The combiner will form set values of temperature. Year and set of values of temperatures is given as input <key, value> to reducer and Reducer will produce year and maximum temperature for that year from the set of temperature values.

PROGRAM:

*/

import org.apache.hadoop.io.IntWritable; import
org.apache.hadoop.io.Text; import
org.apache.hadoop.mapreduce.Job; import
org.apache.hadoop.mapreduce.lib.input.FileInputFormat; import
org.apache.hadoop.mapreduce.lib.output.FileOutputFormat; import
java.io.IOException; import org.apache.hadoop.io.IntWritable;
import org.apache.hadoop.io.Text; import
org.apache.hadoop.io.Text; import
org.apache.hadoop.mapreduce.Mapper;
importorg.apache.hadoop.mapreduce.Reducer;
//Mapper class class
MaxTemperatureMapper extends Mapper<LongWritable, Text, Text, IntWritable> { private

public void map(LongWritable key, Text value, Context context) throws IOException,

static final int MISSING = 9999; @Override

```
InterruptedException {
String line = value.toString(); String year = line.substring(15, 19); int airTemperature; if
(line.charAt(87) == '+') { // parseInt doesn't like leading plus signs airTemperature =
Integer.parseInt(line.substring(88, 92));
} else { airTemperature =
Integer.parseInt(line.substring(87, 92));
String quality = line.substring(92, 93); if (airTemperature != MISSING &&
quality.matches("[01459]")) { context.write(new Text(year), new
IntWritable(airTemperature));
//Reducer class class
MaxTemperatureReducer extends Reducer<Text,
IntWritable, Text, IntWritable> {
@Override public void reduce(Text key, Iterable<IntWritable> values, Context
context) throws IOException, InterruptedException { int maxValue =
Integer.MIN VALUE; for (IntWritable value : values) { maxValue =
Math.max(maxValue, value.get());
}
context.write(key, new IntWritable(maxValue));
}
```

```
}

//Driver Class

public class MaxTemperature {

public static void main(String[] args) throws Exception { if (args.length != 2) {

System.err.println("Usage: MaxTemperature <input path=""> <output path>"); System.exit(-1);

}

Job job = Job.getInstance(new Configuration()); job.setJarByClass(MaxTemperature.class);

job.setJobName("Max temperature");


FileInputFormat.addInputPath(job, new Path(args[0])); FileOutputFormat.setOutputPath(job, new Path(args[1])); job.setMapperClass(MaxTemperatureMapper.class);

job.setReducerClass(MaxTemperatureReducer.class);

job.setOutputKeyClass(Text.class); job.setOutputValueClass(IntWritable.class); job.submit();
```

OUTPUT:

Input for String: 0029029070999991902010720004+64333+023450FM-12+ 000599999V0202501N0278199999999N0000001N9-00331+ 99999098351ADDGF102991999999999999

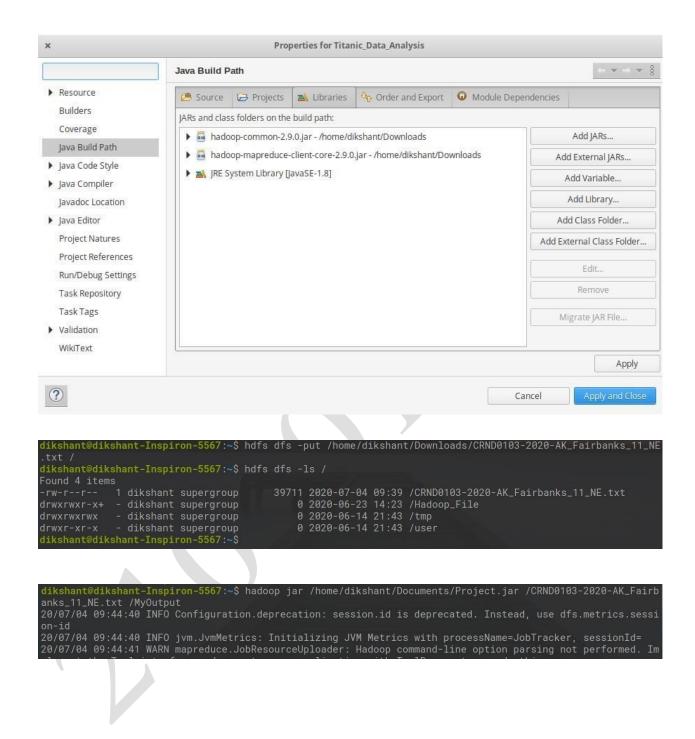

RESULT: Map Reduce program to find year-wise maximum temperature from the sensor data has been successfully executed and the output has been verified.