

Exercise -1

Step 1 — Configure Git

Git needs to know who you are.

Configure your username.

```
git config --global user.name "Grandhe Manikanta Sri Sai Kiran"
```

Configure your email.

```
git config --global user.email "your-email@gmail.com"
```

Example

```
git config --global user.email grandhemanikanta65@gmail.com
```

Verify Configuration

Run

```
git config --global --list
```

Output

```
user.name=Grandhe Manikanta
```

```
user.email=grandhemanikanta@gmail.com
```

MINGW64:/c/Users/HP

```
HP@SaiKiran MINGW64 ~
$ git --version
git version 2.54.0.windows.1

HP@SaiKiran MINGW64 ~
$ git config --global user.name "Grandhe Manikanta Sri Sai Kiran"

HP@SaiKiran MINGW64 ~
$ git config --global user.email "grandhemanikanta65@gmail.com"

HP@SaiKiran MINGW64 ~
$ git config --global --list
core.editor="C:\Users\HP\AppData\Local\Programs\Microsoft VS Code\bin\code" --wait
core.longpaths=true
user.email=grandhemanikanta65@gmail.com
user.name=Grandhe Manikanta Sri Sai Kiran
filter.lfs.clean=git-lfs clean -- %f
filter.lfs.smudge=git-lfs smudge -- %f
filter.lfs.process=git-lfs filter-process
filter.lfs.required=true
safe.directory=*
```

Step 2 — Install Notepad++

Download

<https://notepad-plus-plus.org/downloads/>

Install normally.

Step 3 — Add Notepad++ to Environment Variables

Open

Control Panel

↓

System

↓

Advanced System Settings



Environment Variables

Under

User Variables

Edit

Path

Add

C:\Program Files\Notepad++\

Click

OK

Restart Git Bash.

This matches the lab instructions for adding Notepad++ to the PATH.



Step 4 — Verify Notepad++

Run

notepad++

If Notepad++ opens,

Everything is configured correctly.

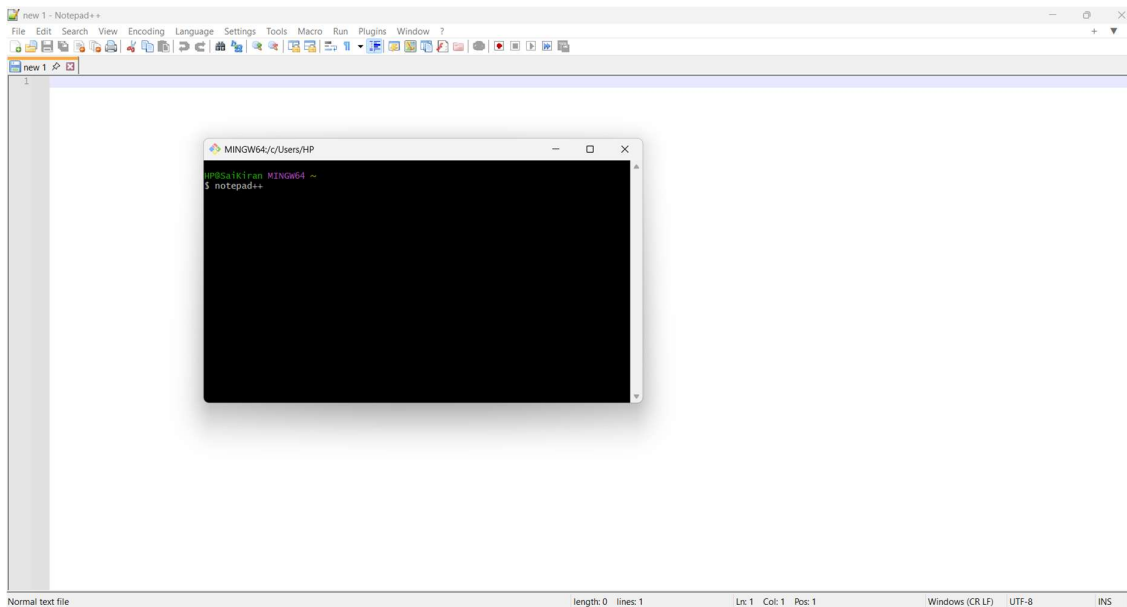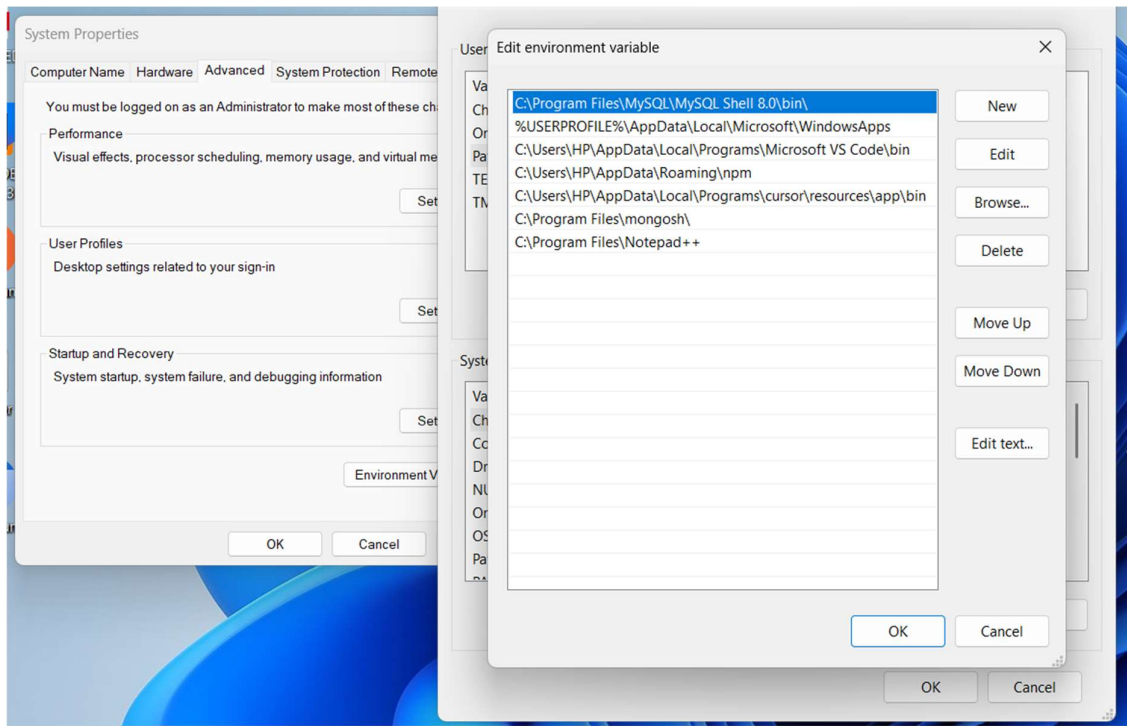

Step 6 — Configure Notepad++ as Git Default Editor

Run

```
git config --global core.editor "notepad++.exe -multiInst -nosession"
```

Now verify

```
git config --global -e
```

Git should open

.gitconfig

inside Notepad++.

You'll see

[user]

name = Grandhe Manikanta

email = your-email@gmail.com

[core]

editor = notepad++.exe -multiInst -nosession

The screenshot shows a Windows command prompt window titled 'MINGW64/c/Users/HP' with the following commands and output:

```
HP@Saikiran MINGW64 ~
$ git config --global core.editor "notepad++.exe -multiInst -nosession"
HP@Saikiran MINGW64 ~
$ git config --global -e
hint: Waiting for your editor to close the file...
```

Below the command prompt, the Notepad++ editor is open, displaying the contents of the .gitconfig file. The file is titled 'C:\Users\HP\.gitconfig - Notepad++' and contains the following configuration:

```
1 [core]
2   editor = notepad++.exe -multiInst -nosession
3   longpaths = true
4 [user]
5   email = grandhemanikanta65@gmail.com
6   name = Grandhe Manikanta Sri Sai Kiran
7 [filter "lfs"]
8   clean = git-lfs clean -- %f
9   smudge = git-lfs smudge -- %f
10  process = git-lfs filter-process
11  required = true
12 [safe]
13  directory = *
```

The status bar at the bottom of the Notepad++ window indicates 'Prope length: 304 lines: 14', 'Ln: 1 Col: 1 Pos: 1', 'Unix (LF)', 'UTF-8', and 'INS'.

Git Initialisation

```

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig (main|SPARSE)
$ git status
On branch main
You are in a sparse checkout with 100% of tracked files present.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    week_6_GIT/

nothing added to commit but untracked files present (use "git add" to track)

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig (main|SPARSE)
$ cd Week_6_GIT/Exercise_1

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_1 (main|SPARSE)
$ ls
Configure_Notepad++_as_Git_Default_Editor.png  Git_Configuration.png  Notepad++_added_to_path.png  Notepad++_opened_using_git.png

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_1 (main|SPARSE)
$ git status
On branch main
You are in a sparse checkout with 100% of tracked files present.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    ../

nothing added to commit but untracked files present (use "git add" to track)

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_1 (main|SPARSE)
$ cd ..

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT (main|SPARSE)
$ cd ..

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig (main|SPARSE)
$ ls -al
total 44
drwxr-xr-x 1 HP 197121  0 Jul 25 07:33 ./
drwxr-xr-x 1 HP 197121  0 Jul 19 13:53 ../
drwxr-xr-x 1 HP 197121  0 Jul 25 08:52 .git/
-rw-r--r-- 1 HP 197121 1147 Jul 22 05:21 .gitignore
drwxr-xr-x 1 HP 197121  0 Jul 16 07:22 .idea/
drwxr-xr-x 1 HP 197121  0 Jul 16 07:22 Week_1_Engineering_Concepts/
drwxr-xr-x 1 HP 197121  0 Jul 16 07:23 Week_2_Spring_Framework/
drwxr-xr-x 1 HP 197121  0 Jul 16 07:23 Week_3_SpringREST_using_SpringBoot3/
drwxr-xr-x 1 HP 197121  0 Jul 16 07:23 Week_4_Microservices_Spring_Cloud/
drwxr-xr-x 1 HP 197121  0 Jul 24 21:38 Week_5_ReactJS_HOL/
drwxr-xr-x 1 HP 197121  0 Jul 25 07:40 Week_6_GIT/

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig (main|SPARSE)
$ |

```

Step 7: Create welcome.txt

Run:

```
echo "Welcome to Version Control" > welcome.txt
```

Step 7: Verify the file

ls

You should now see:

Configure_Notepad++_as_Git_Default_Editor.png

Git_Configuration.png

Notepad++_added_to_path.png

Notepad++_opened_using_git.png


welcome.txt

Step 8: Check its contents

cat welcome.txt

Expected output:

Welcome to Version Control

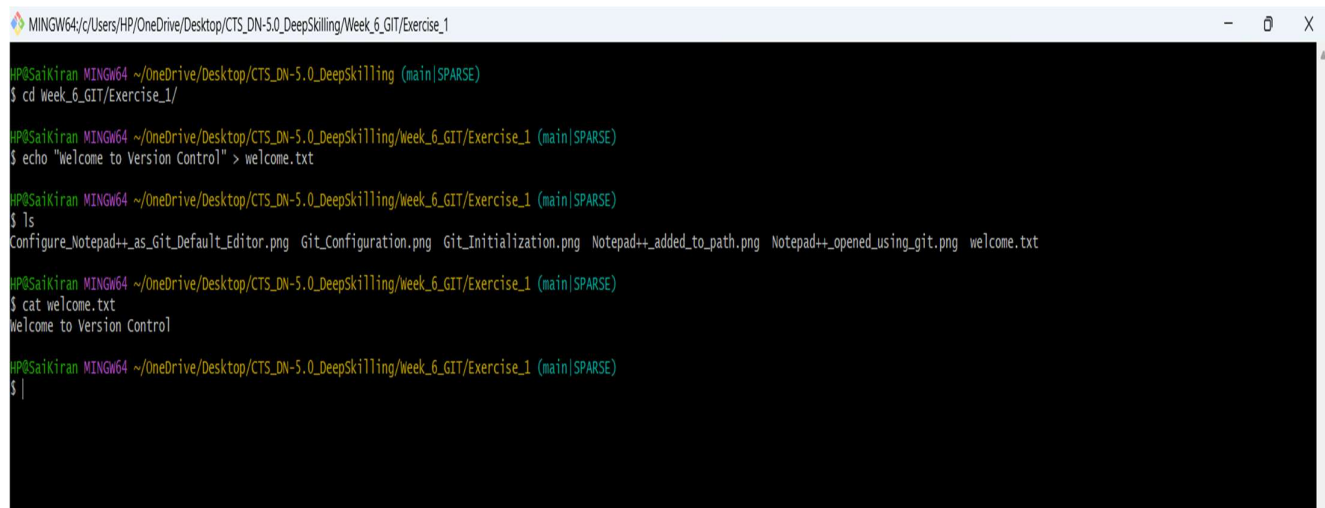

```
MINGW64/c/Users/HP/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_1
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling (main|SPARSE)
$ cd Week_6_GIT/Exercise_1/
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_1 (main|SPARSE)
$ echo "Welcome to Version Control" > welcome.txt
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_1 (main|SPARSE)
$ ls
Configure_Notepad+_as_git_Default_Editor.png  Git_Configuration.png  Git_Initialization.png  Notepad+_added_to_path.png  Notepad+_opened_using_git.png  welcome.txt
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_1 (main|SPARSE)
$ cat welcome.txt
Welcome to Version Control
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_1 (main|SPARSE)
$ |
```

Step 9: Check Git status

Run:

git status

Now Git should detect welcome.txt.

Step 10: Stage everything inside Exercise_1

Since you're already inside Exercise_1, run:

git add .

This stages:

- welcome.txt
- all your screenshots (if they haven't already been tracked)

Step 11: Verify staging

Run:

git status

You should see:

Changes to be committed:

new file: Configure_Notepad++_as_Git_Default_Editor.png

new file: Git_Configuration.png

new file: Notepad++_added_to_path.png

new file: Notepad++_opened_using_git.png

new file: welcome.txt

Step 12: Commit

Since you're using VS Code as the Git editor, use the lab-style commit command:

```
git commit
```

VS Code should open the commit message file. Write something like:

Git Exercise 1

Configured Git user settings.

Configured VS Code as the default Git editor.

Created welcome.txt.

Added screenshots for Git configuration.

Save the file and close the editor.

Git will automatically create the commit.

If VS Code doesn't open, we can instead use:

```
git commit -m "Completed Git Exercise 1"
```

Step 13: Push to GitHub

```
git push origin main
```

Note

The original lab uses:

```
git add welcome.txt
```


because it only creates one file. Since you're maintaining a well-organized GitHub repository with screenshots and documentation, using:

`git add .`

inside `Exercise_1` is perfectly appropriate—it stages all files in that folder without affecting the rest of your repository.

```
MINGW64~/c/Users/HP/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_1 (main|SPARSE)
$ git status
On branch main
You are in a sparse checkout with 100% of tracked files present.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  ../

nothing added to commit but untracked files present (use "git add" to track)

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_1 (main|SPARSE)
$ cd ..

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT (main|SPARSE)
$ cd ..

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig (main|SPARSE)
$ git status
On branch main
You are in a sparse checkout with 100% of tracked files present.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  Week_6_GIT/

nothing added to commit but untracked files present (use "git add" to track)

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig (main|SPARSE)
$ git add .
warning: in the working copy of 'Week_6_GIT/Exercise_1/welcome.txt', LF will be replaced by CRLF the next time Git touches it

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig (main|SPARSE)
$ git commit -m "Completed Exercise1"
[main adc553e] Completed Exercise1
 7 files changed, 1 insertion(+)
 create mode 100644 Week_6_GIT/Exercise_1/Configure_Notepad++_as_Git_Default_Editor.png
 create mode 100644 Week_6_GIT/Exercise_1/Created_welcome_txt_file.png
 create mode 100644 Week_6_GIT/Exercise_1/Git_Configuration.png
 create mode 100644 Week_6_GIT/Exercise_1/Git_Initialization.png
 create mode 100644 Week_6_GIT/Exercise_1/Notepad++_added_to_path.png
 create mode 100644 Week_6_GIT/Exercise_1/Notepad++_opened_using_git.png
 create mode 100644 Week_6_GIT/Exercise_1/welcome.txt

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig (main|SPARSE)
$ git pull origin main --rebase
remote: Enumerating objects: 8, done.
remote: Counting objects: 100% (8/8), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 5 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (5/5), 11.36 KiB | 684.00 KiB/s, done.
From https://github.com/G-Manikanta1729/CTS_DN-5.0_DeepSkillig
 * branch          main       -> FETCH_HEAD
   63b262d..051e890  main       -> origin/main
Successfully rebased and updated refs/heads/main.

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig (main|SPARSE)
```

```
HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling (main|SPARSE)
$ git pull origin main --rebase
remote: Enumerating objects: 8, done.
remote: Counting objects: 100% (8/8), done.
remote: Compressing objects: 100% (5/5), done.
remote: Total 5 (delta 3), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (5/5), 11.36 KiB | 684.00 KiB/s, done.
From https://github.com/G-Manikanta1729/CTS_DN-5.0_DeepSkillling
 * branch          main          -> FETCH_HEAD
 63b262d..051e890  main          -> origin/main
Successfully rebased and updated refs/heads/main.
```

```
HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling (main|SPARSE)
$ git push origin main
Enumerating objects: 12, done.
Counting objects: 100% (12/12), done.
Delta compression using up to 12 threads
Compressing objects: 100% (9/9), done.
Writing objects: 100% (11/11), 468.84 KiB | 36.06 MiB/s, done.
Total 11 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.
To https://github.com/G-Manikanta1729/CTS_DN-5.0_DeepSkillling.git
 051e890..1931248  main -> main
```

```
HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling (main|SPARSE)
```