

## Step 1: Open Git Bash

Open **Git Bash**.

Move to your repository.

Example:

```
cd "C:/Users/HP/OneDrive/Desktop/CTS_DN-5.0_DeepSkilling"
```


Verify you're inside a Git repository.

```
git status
```

Expected output:

On branch main

nothing to commit, working tree clean

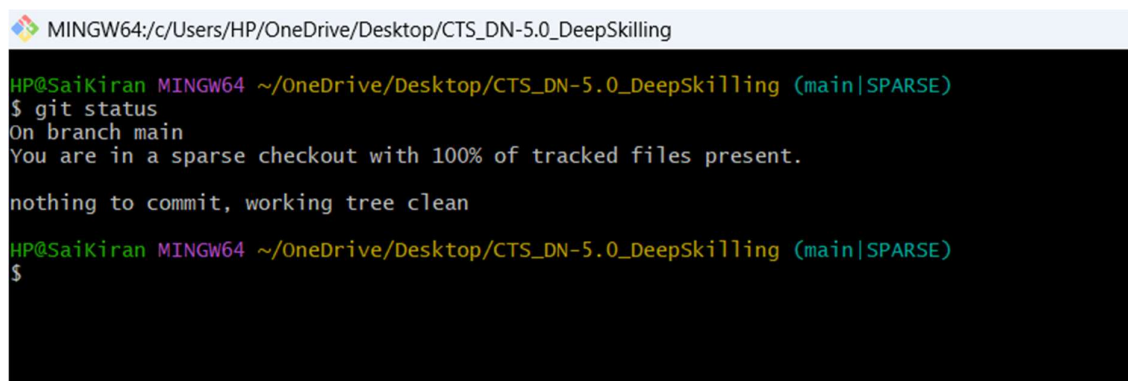A screenshot of a Git Bash terminal window. The title bar shows the path "MINGW64:/c:/Users/HP/OneDrive/Desktop/CTS\_DN-5.0\_DeepSkilling". The terminal content shows the user "HP@SaiKiran" in a "MINGW64" environment at the directory "~/OneDrive/Desktop/CTS\_DN-5.0\_DeepSkilling" on the "main" branch in "SPARSE" mode. The command "\$ git status" is entered, and the output is: "On branch main", "You are in a sparse checkout with 100% of tracked files present.", and "nothing to commit, working tree clean". The prompt "\$" is shown again at the bottom.

```
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkilling (main|SPARSE)
$ git status
On branch main
You are in a sparse checkout with 100% of tracked files present.

nothing to commit, working tree clean
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkilling (main|SPARSE)
$
```

## Step 2: Navigate to Exercise 2 Folder

Go to the Week 6 folder.


```
cd Week_6_GIT
```

Create the exercise folder if it doesn't already exist.

```
mkdir Exercise_2_Git_Ignore
```

Move into it.

```
cd Exercise_2_Git_Ignore
```

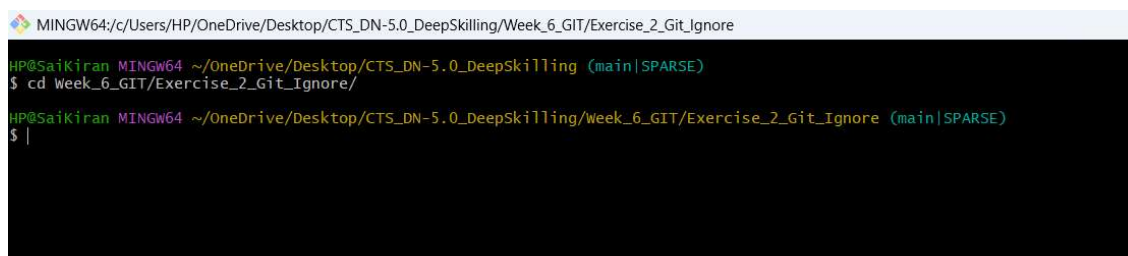A screenshot of a Git Bash terminal window. The title bar shows the path "MINGW64:/c:/Users/HP/OneDrive/Desktop/CTS\_DN-5.0\_DeepSkilling/Week\_6\_GIT/Exercise\_2\_Git\_Ignore". The terminal content shows the user "HP@SaiKiran" in a "MINGW64" environment at the directory "~/OneDrive/Desktop/CTS\_DN-5.0\_DeepSkilling" on the "main" branch in "SPARSE" mode. The command "\$ cd Week\_6\_GIT/Exercise\_2\_Git\_Ignore/" is entered, and the prompt "\$" is shown again at the bottom.

```
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkilling (main|SPARSE)
$ cd Week_6_GIT/Exercise_2_Git_Ignore/
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkilling/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ |
```

## Step 3: Create a Log File

Create a sample log file.

## Git Bash

`touch sample.log`

or

`echo "Application Started" > sample.log`

Verify:

`ls`

Output:

`sample.log`



```
MINGW64/c:/Users/HP/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_2_Git_Ignore
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ touch sample.log
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ echo "Application Started" > sample.log
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ ls
Git_Bash_Verifying_All_commits_are_done.png  sample.log
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ |
```

## Step 4: Create a Log Folder

Create a folder named **log**.

`mkdir log`

Move inside it.

`cd log`

Create another log file.

`echo "Server Started" > server.log`

Go back.

`cd ..`

Now the folder structure becomes

Exercise\_2\_Git\_Ignore/

sample.log

log/

server.log

```
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ mkdir log

HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ cd log

HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_2_Git_Ignore/log (main|SPARSE)
$ echo "Server Started" > server.log

HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_2_Git_Ignore/log (main|SPARSE)
$ cd ..

HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ |
```

## Step 5: Check Git Status

Run

git status

Output

Untracked files:

sample.log

log/

Git is currently tracking both because they are not ignored yet.

```

HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ git status
On branch main
You are in a sparse checkout with 100% of tracked files present.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  ./

nothing added to commit but untracked files present (use "git add" to track)
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ cd ..
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT (main|SPARSE)
$ cd ..
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling (main|SPARSE)
$ git status
On branch main
You are in a sparse checkout with 100% of tracked files present.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  Week_6_GIT/Exercise_2_Git_Ignore/

nothing added to commit but untracked files present (use "git add" to track)
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling (main|SPARSE)
$ cd Week_6_GIT/
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT (main|SPARSE)
$ git status
On branch main
You are in a sparse checkout with 100% of tracked files present.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  Exercise_2_Git_Ignore/

nothing added to commit but untracked files present (use "git add" to track)
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT (main|SPARSE)
$ cd Exercise_2_Git_Ignore/
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ git status
On branch main
You are in a sparse checkout with 100% of tracked files present.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
  ./

nothing added to commit but untracked files present (use "git add" to track)
HP@SaiKiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillling/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)

```

## Step 6: Create .gitignore

Create a file named

.gitignore

Git Bash

touch .gitignore


Open it.

VS Code

code .gitignore

or

notepad .gitignore

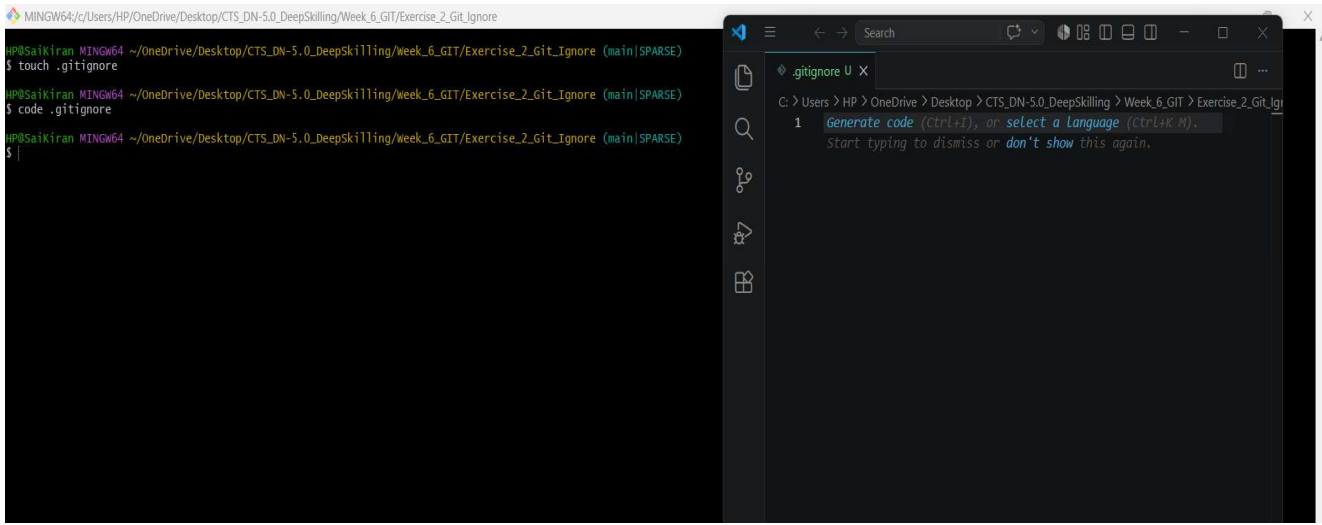

## Step 7: Add Ignore Rules

Inside .gitignore

```
*.log
```

```
log/
```

Save the file.

Explanation:

```
*.log
```

↓

Ignore every file ending with .log

Example

```
sample.log
```

```
error.log
```

```
debug.log
```

```
server.log
```

---

log/

↓

Ignore every folder named log

Including

log/

log/server.log

log/test.log

---

### **Step 8: Verify Git Ignore**

Execute

git status

Output

Untracked files:

.gitignore

Notice:

Git no longer shows


sample.log

log/

Only

.gitignore

appears because Git is ignoring the log file and folder as required by the exercise.

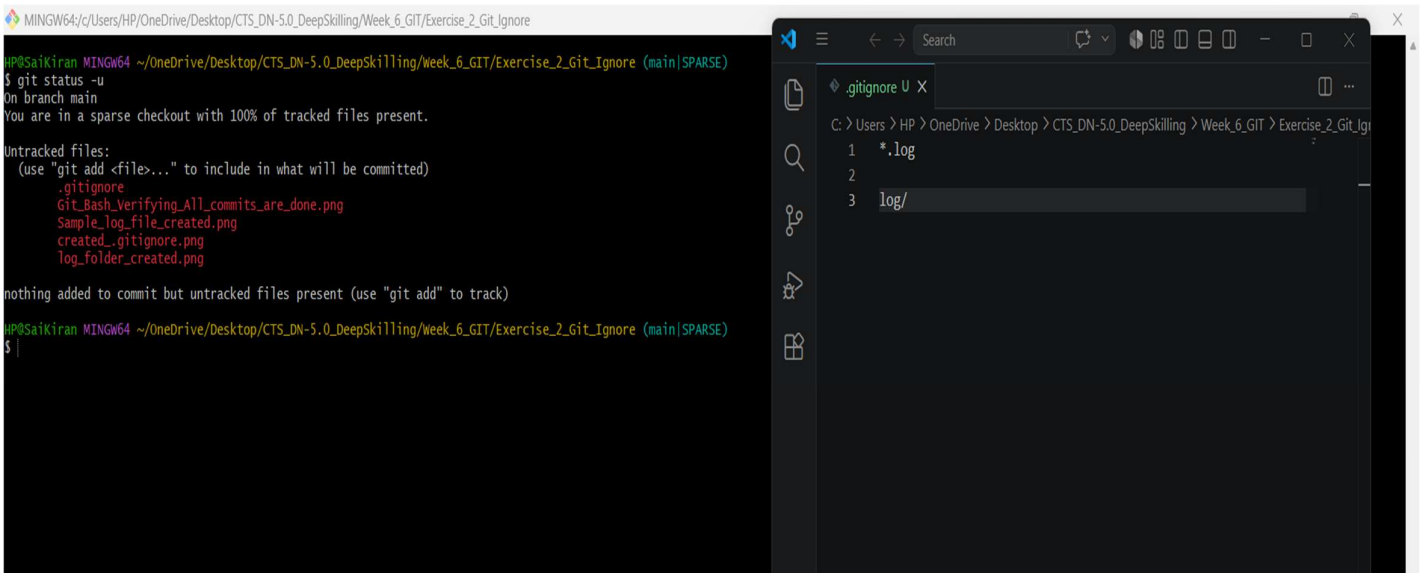

## Step 9: Stage .gitignore

git add .gitignore

Check

git status

Output

Changes to be committed:

new file: .gitignore

---

## Step 10: Commit

git commit -m "Add .gitignore to ignore log files and folders"

Example Output

[main abc1234]

1 file changed

create mode 100644 .gitignore

---

## Step 11: Push to GitHub

Pull first

git pull origin main

Push

git push origin main

Expected

Everything up-to-date

or

Writing objects...

Done

---

## Step 12: Verify on GitHub

Open your repository.

You should see

Exercise\_2\_Git\_Ignore

|

├── .gitignore

You **will not** see

sample.log

log/

because Git ignores them.



```

MINGW64/c/Users/HP/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_2_Git_Ignore
HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ git status -u
On branch main
You are in a sparse checkout with 100% of tracked files present.

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore
        Git_Bash_Verifying_All_commits_are_done.png
        Sample_log_file_created.png
        added_code_to_.gitignore.png
        created_.gitignore.png
        log_folder_created.png

nothing added to commit but untracked files present (use "git add" to track)

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ git add .gitignore

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ git status
On branch main
You are in a sparse checkout with 100% of tracked files present.

Changes to be committed:
  (use "git restore --staged <file>..." to unstage)
        new file:   .gitignore

Untracked files:
  (use "git add <file>..." to include in what will be committed)
        Git_Bash_Verifying_All_commits_are_done.png
        Sample_log_file_created.png
        added_code_to_.gitignore.png
        created_.gitignore.png
        log_folder_created.png

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ git commit -m "Add .gitignore to ignore log files and folders"
[main 80bd781] Add .gitignore to ignore log files and folders
1 file changed, 3 insertions(+)
create mode 100644 Week_6_GIT/Exercise_2_Git_Ignore/.gitignore

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ git pull origin main --rebase
From https://github.com/G-Manikanta1729/CTS_DN-5.0_DeepSkillig
* branch      main      -> FETCH_HEAD
Current branch main is up to date.

HP@Saikiran MINGW64 ~/OneDrive/Desktop/CTS_DN-5.0_DeepSkillig/Week_6_GIT/Exercise_2_Git_Ignore (main|SPARSE)
$ git push origin main
Enumerating objects: 7, done.
Counting objects: 100% (7/7), done.
Delta compression using up to 12 threads
Compressing objects: 100% (3/3), done.
Writing objects: 100% (5/5), 437 bytes | 437.00 KiB/s, done.
Total 5 (delta 1), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (1/1), completed with 1 local object.

```

CTS\_DN-5.0\_DeepSkillig / Week\_6\_GIT / Exercise\_2\_Git\_Ignore

G-Manikanta1729 Add .gitignore to ignore log files and folders 80bd781 · 2 minutes ago

| Name       | Last commit message                         | Last commit date |
|------------|---------------------------------------------|------------------|
| ..         |                                             |                  |
| .gitignore | Add .gitignore to ignore log files and f... | 2 minutes ago    |

## Final Folder Structure

CTS\_DN-5.0\_DeepSkillig/

└─ Week\_6\_GIT/

└─ Exercise\_2\_Git\_Ignore/

└─ .gitignore

└─ sample.log (Ignored)

└─ log/ (Ignored)

└─ server.log (Ignored)

## **Complete .gitignore**

# Ignore all log files

\*.log

# Ignore log directory

log/

---

## **Commands Used**

cd Week\_6\_GIT

mkdir Exercise\_2\_Git\_Ignore

cd Exercise\_2\_Git\_Ignore

echo "Application Started" > sample.log

mkdir log

cd log

echo "Server Started" > server.log

cd ..

touch .gitignore

git status

git add .gitignore

git commit -m "Add .gitignore to ignore log files and folders"

git pull origin main

git push origin main

---

### **Expected Output Summary**

Before .gitignore

Untracked files:

sample.log

log/

After .gitignore

Untracked files:

.gitignore

After Commit

nothing to commit, working tree clean

This completes the implementation exactly as described in the CTS hands-on: create a .log file and a log folder, configure .gitignore to ignore them, and verify the behavior using git status.

