

Brain Stroke Analysis from Non-Contrast CT and Path-Planning for Robot-Assisted Surgical Intervention



Supervisor: Dr. Mirnalinee T T Members: A Anirudh, Karthik Desingu

Highlights of the Project

Objectives

- To detect the presence of, localize, and segment stroke regions from NCCT volumes.
- To devise a path-planning strategy for surgical intervention using a robotic arm.
- To enable clinicians to visualize stroke region and planned-path using a web application.

Distinguishing Features

- Multi-dimensional feature fusion for context-aware segmentation,
- Improvements to Q-learning for robotic path-planning to attain faster convergence.

Dataset & Environment

- Benchmark Intracranial Hemorrhage Dataset [1] comprising 2500 brain window images collected from 82 patient samples.
- Three-dimensional workspace with rectangular obstacles and target defined in the xyz-space, chosen to represent a realistic surgical environ.

User Interface

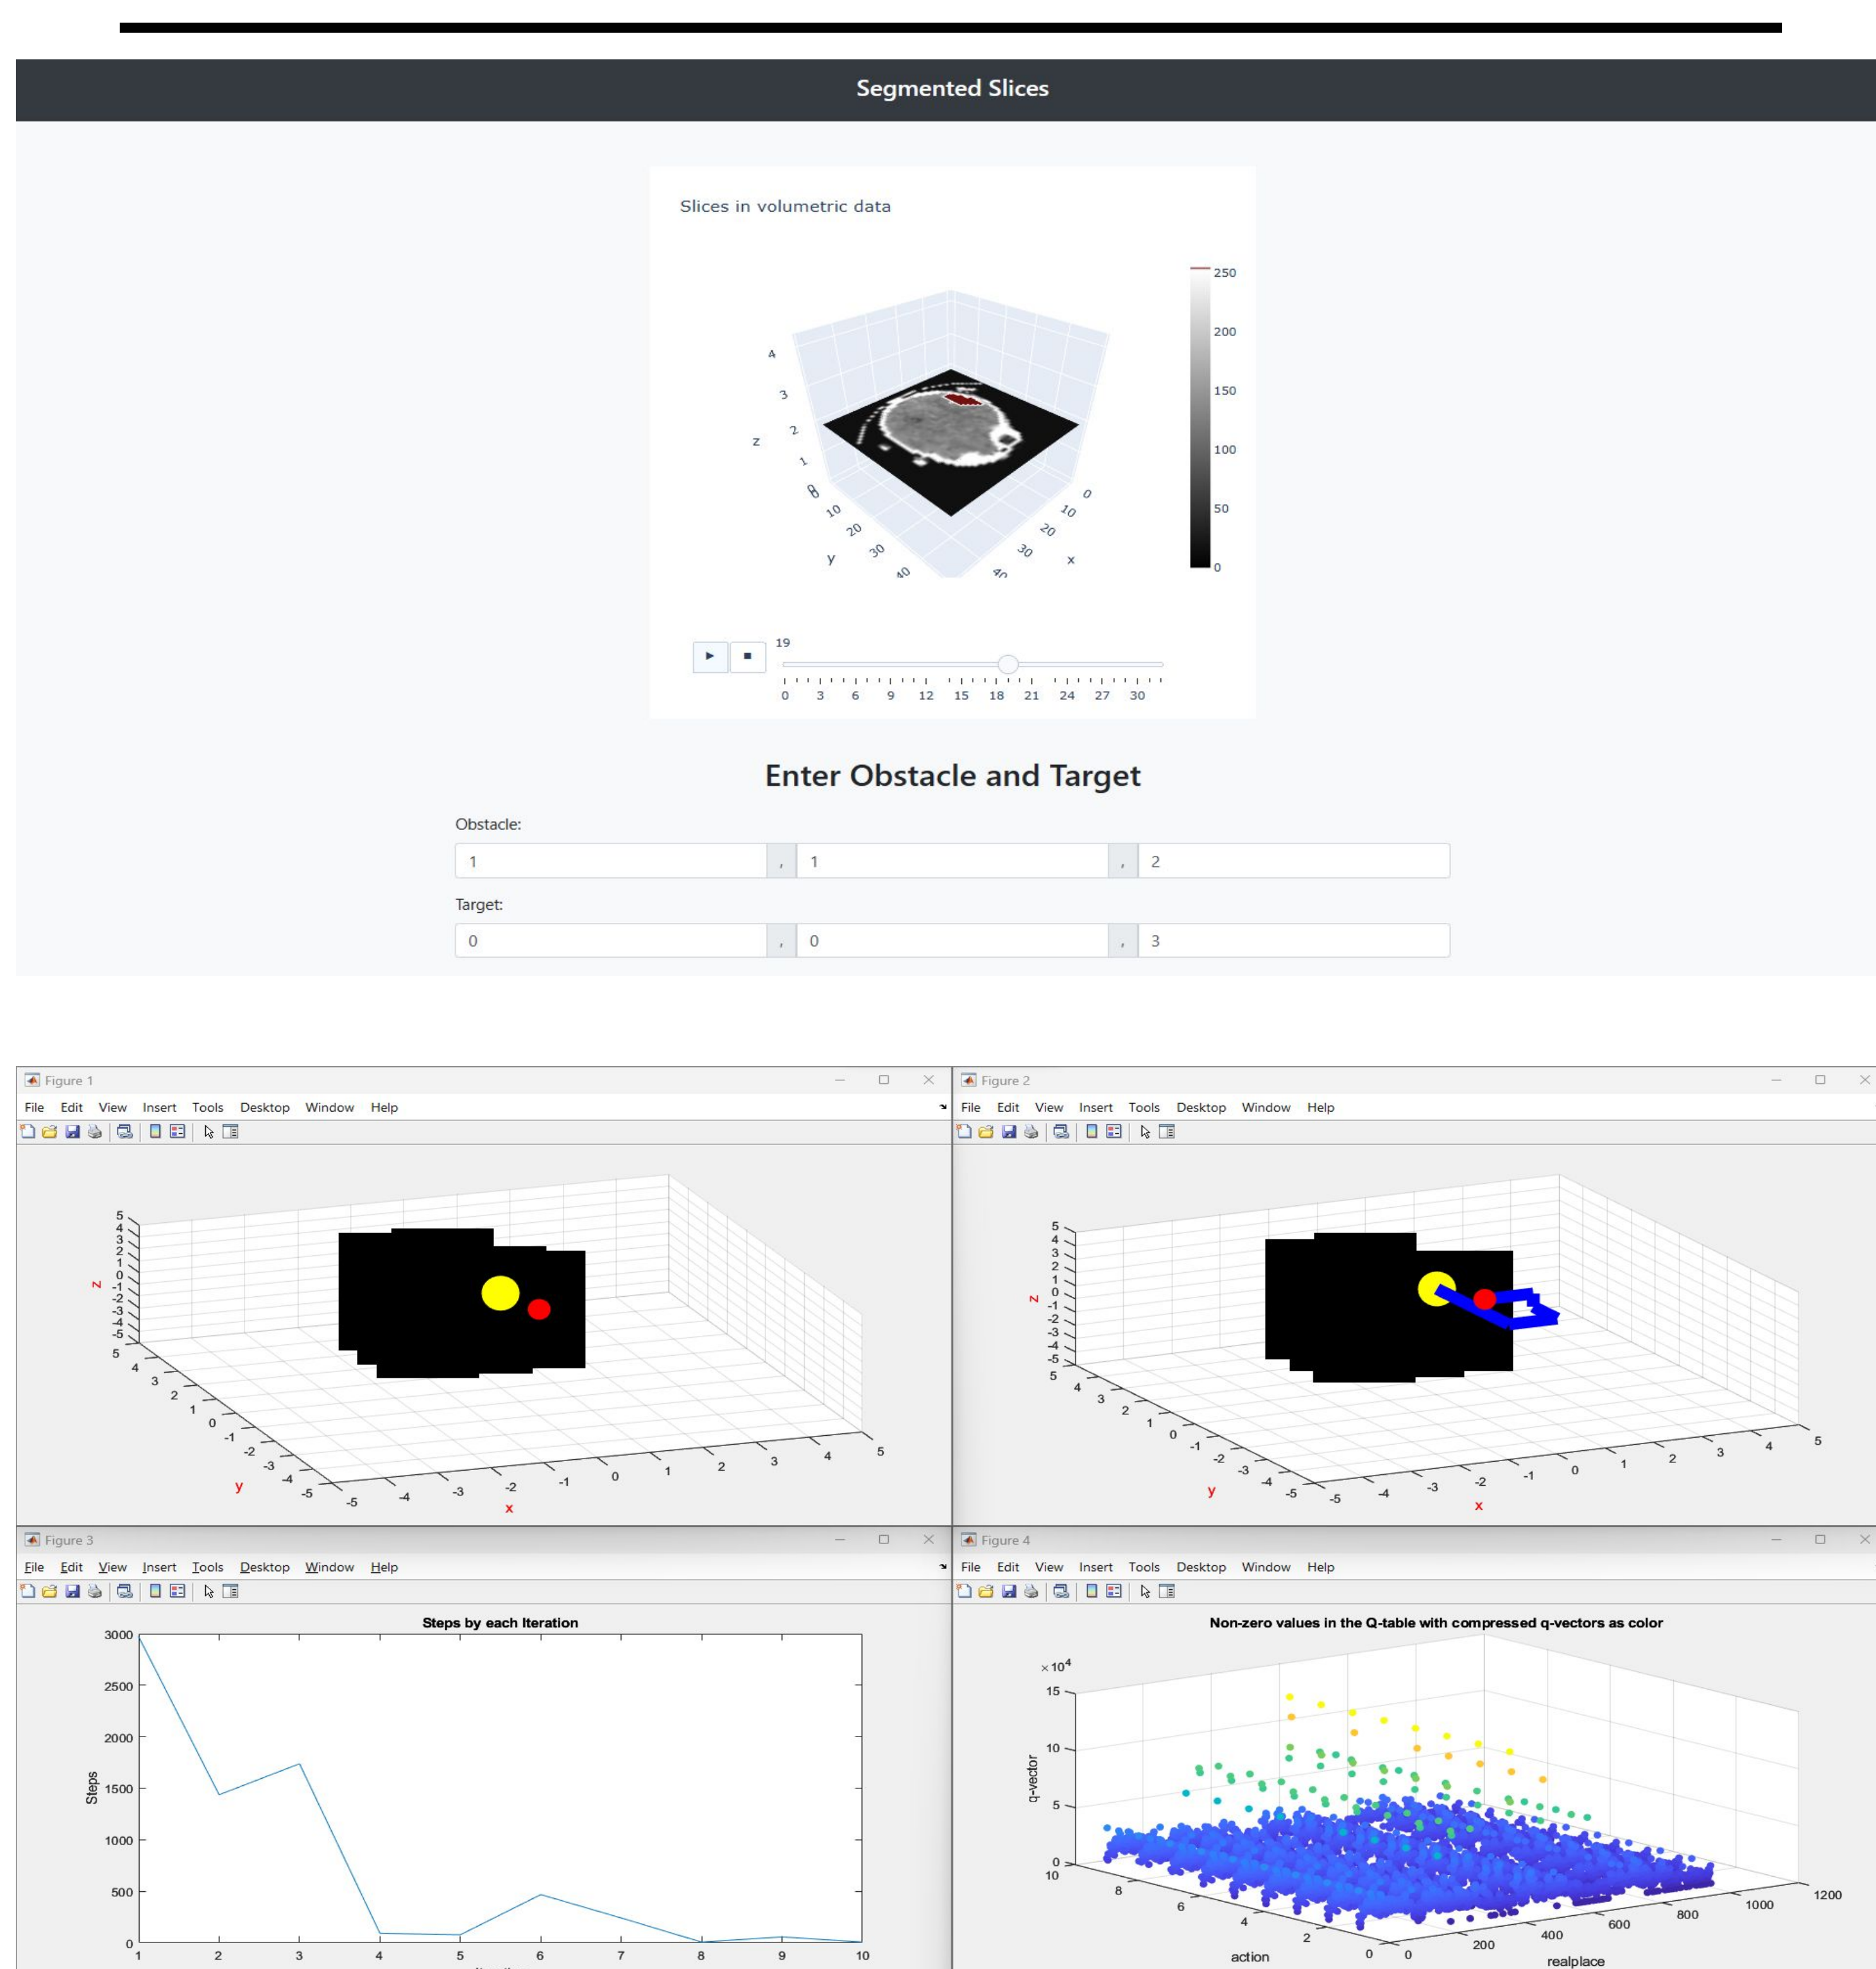


Figure 1. Screenshots from the visualization web-app

Proposed Method

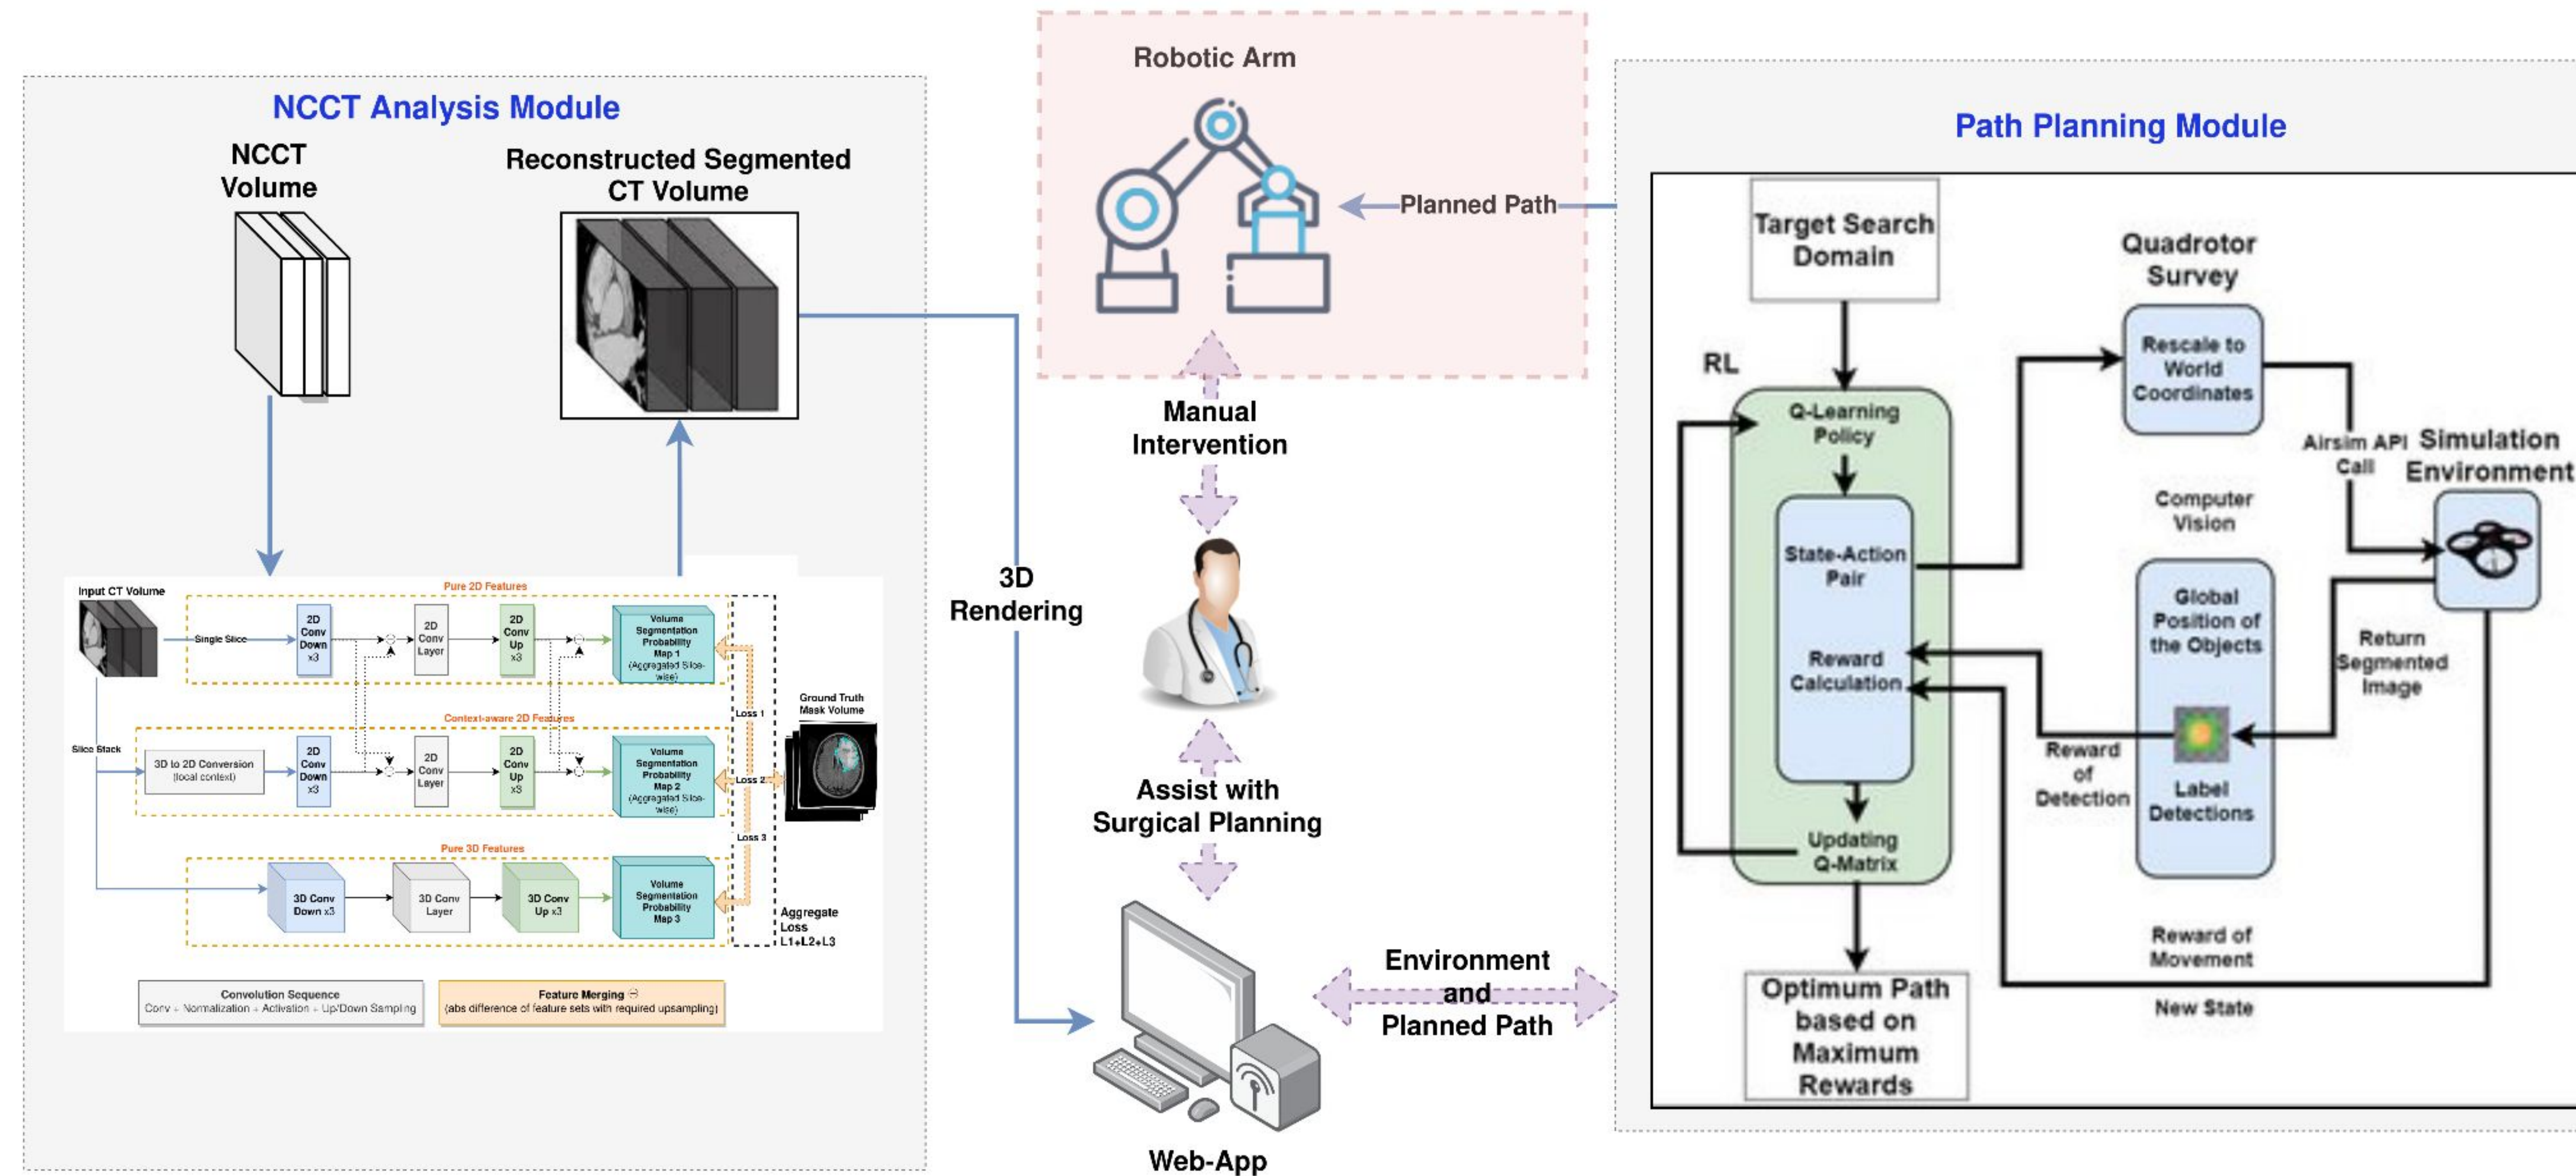


Figure 2. Overall architecture and workflow of the proposed system

Module 1: Stroke Region Detection

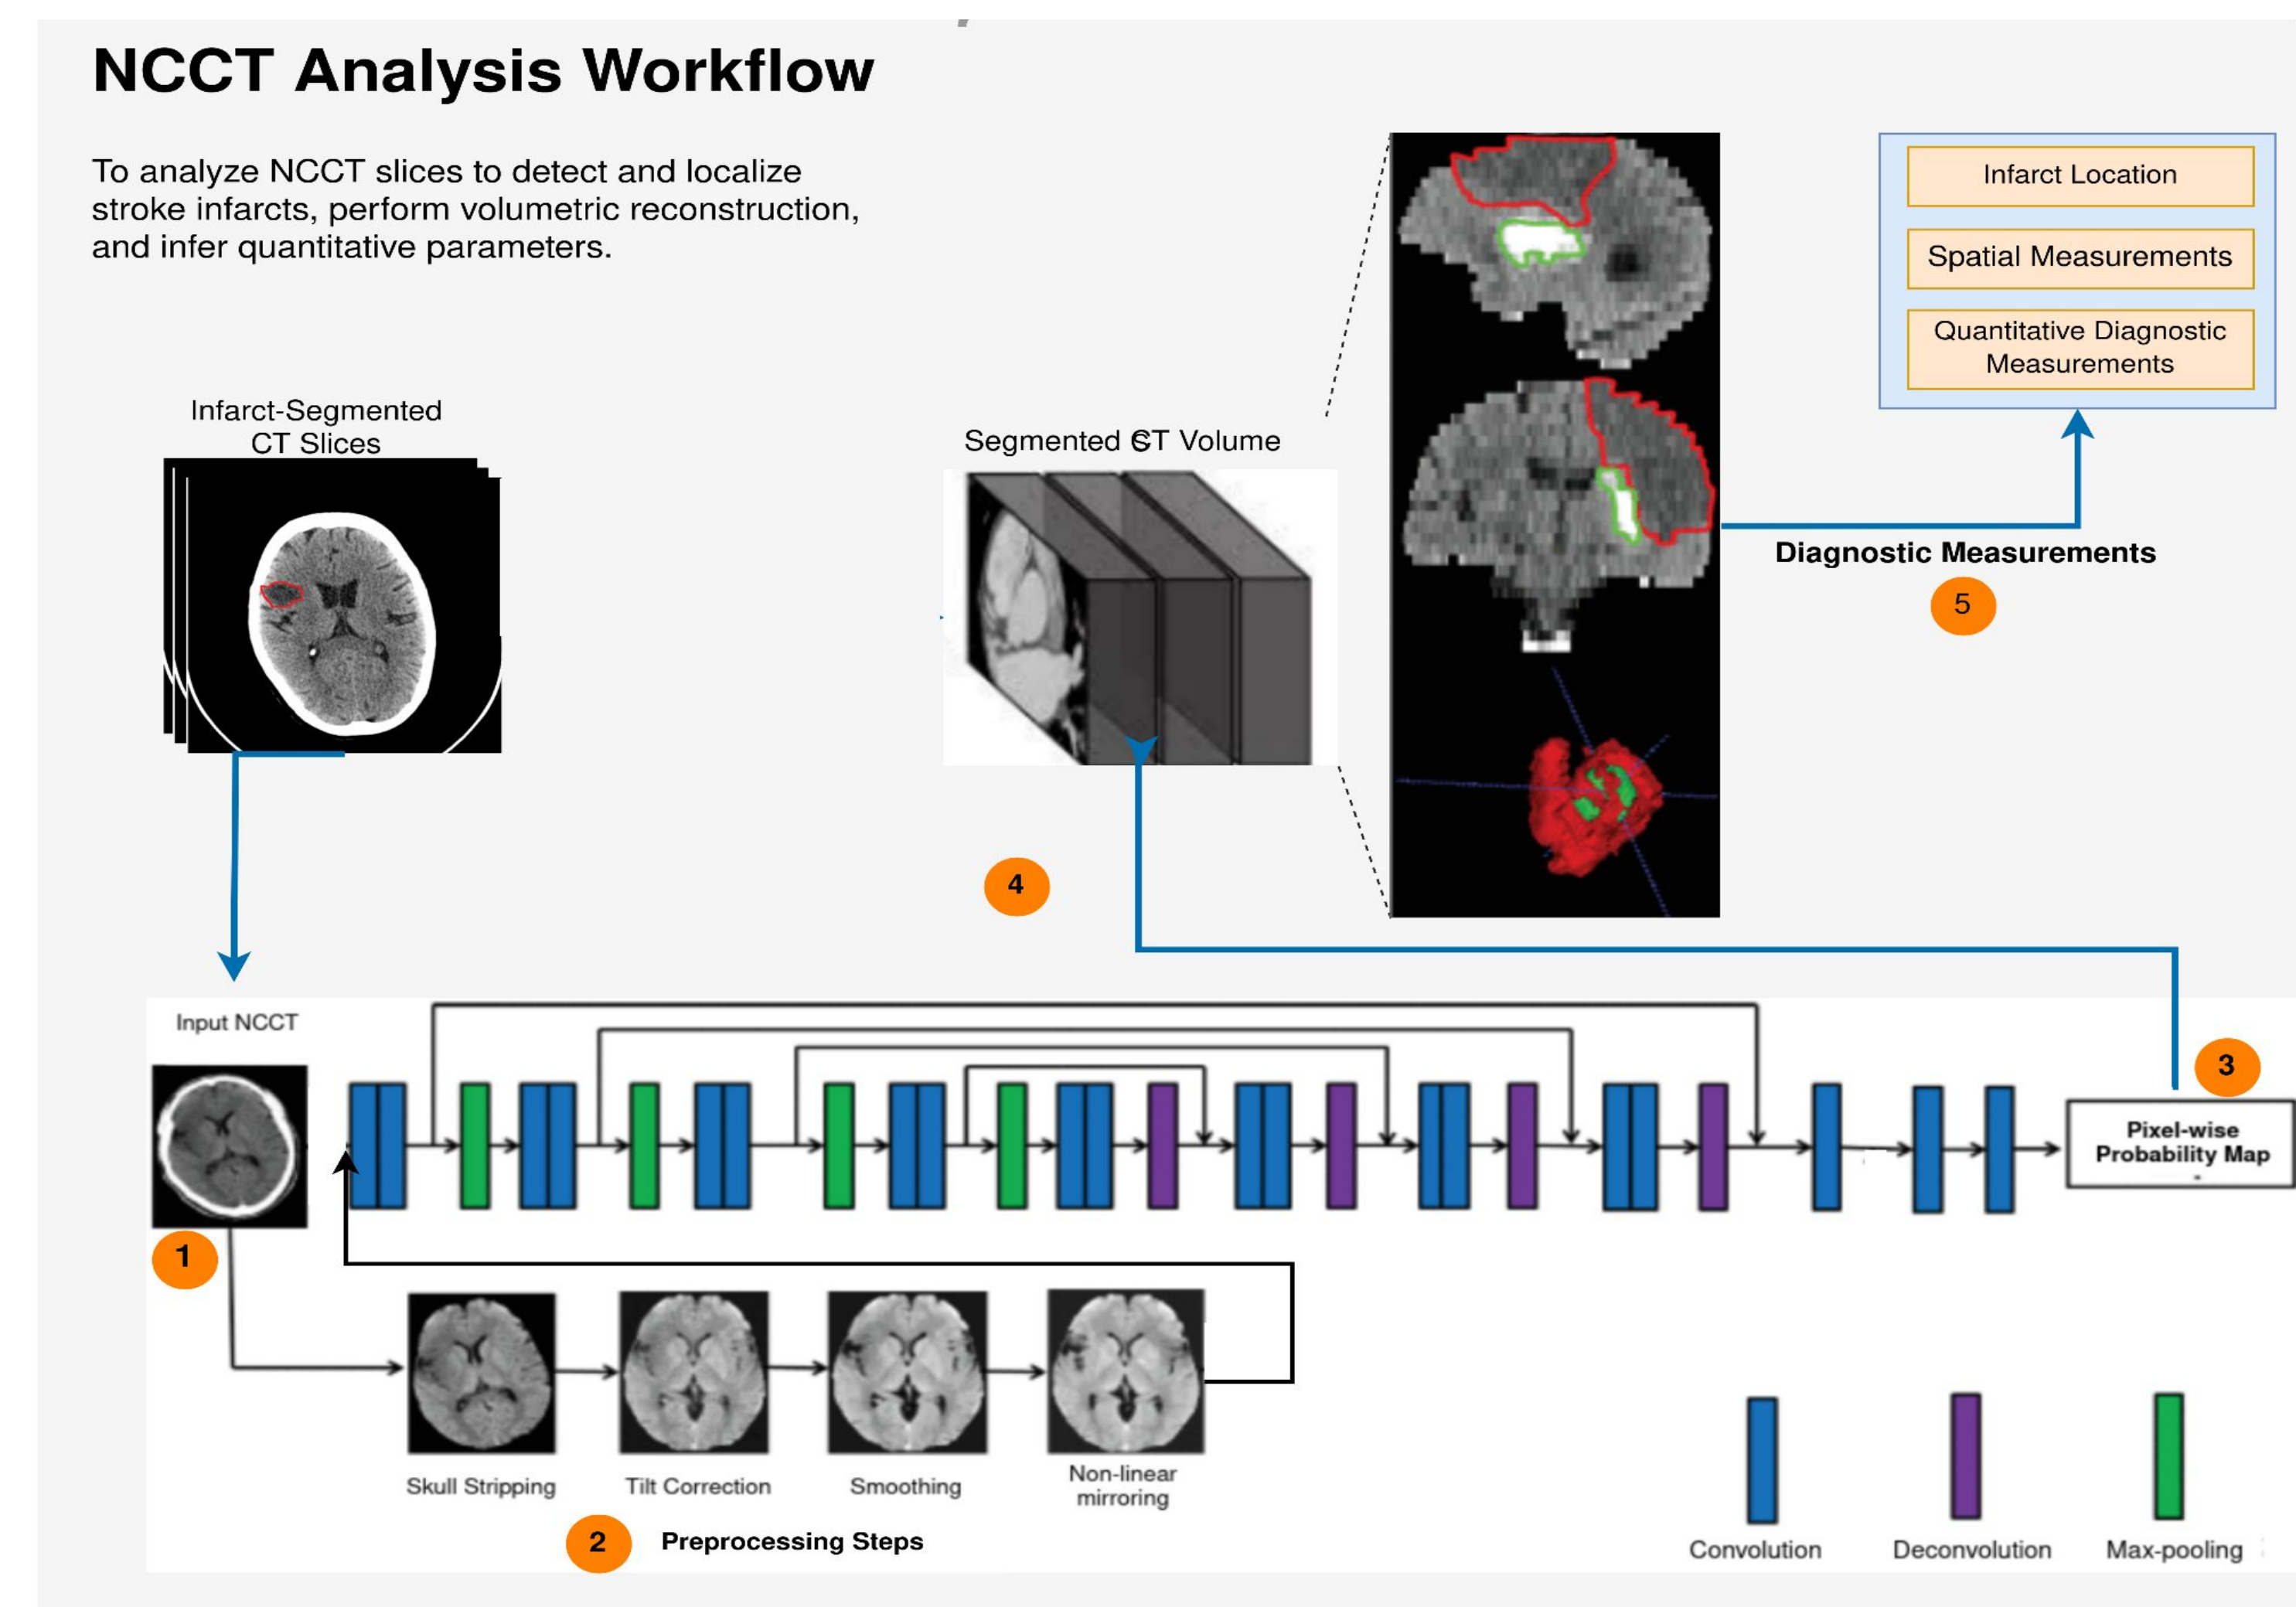


Figure 3. Proc. steps of NCCT analysis workflow

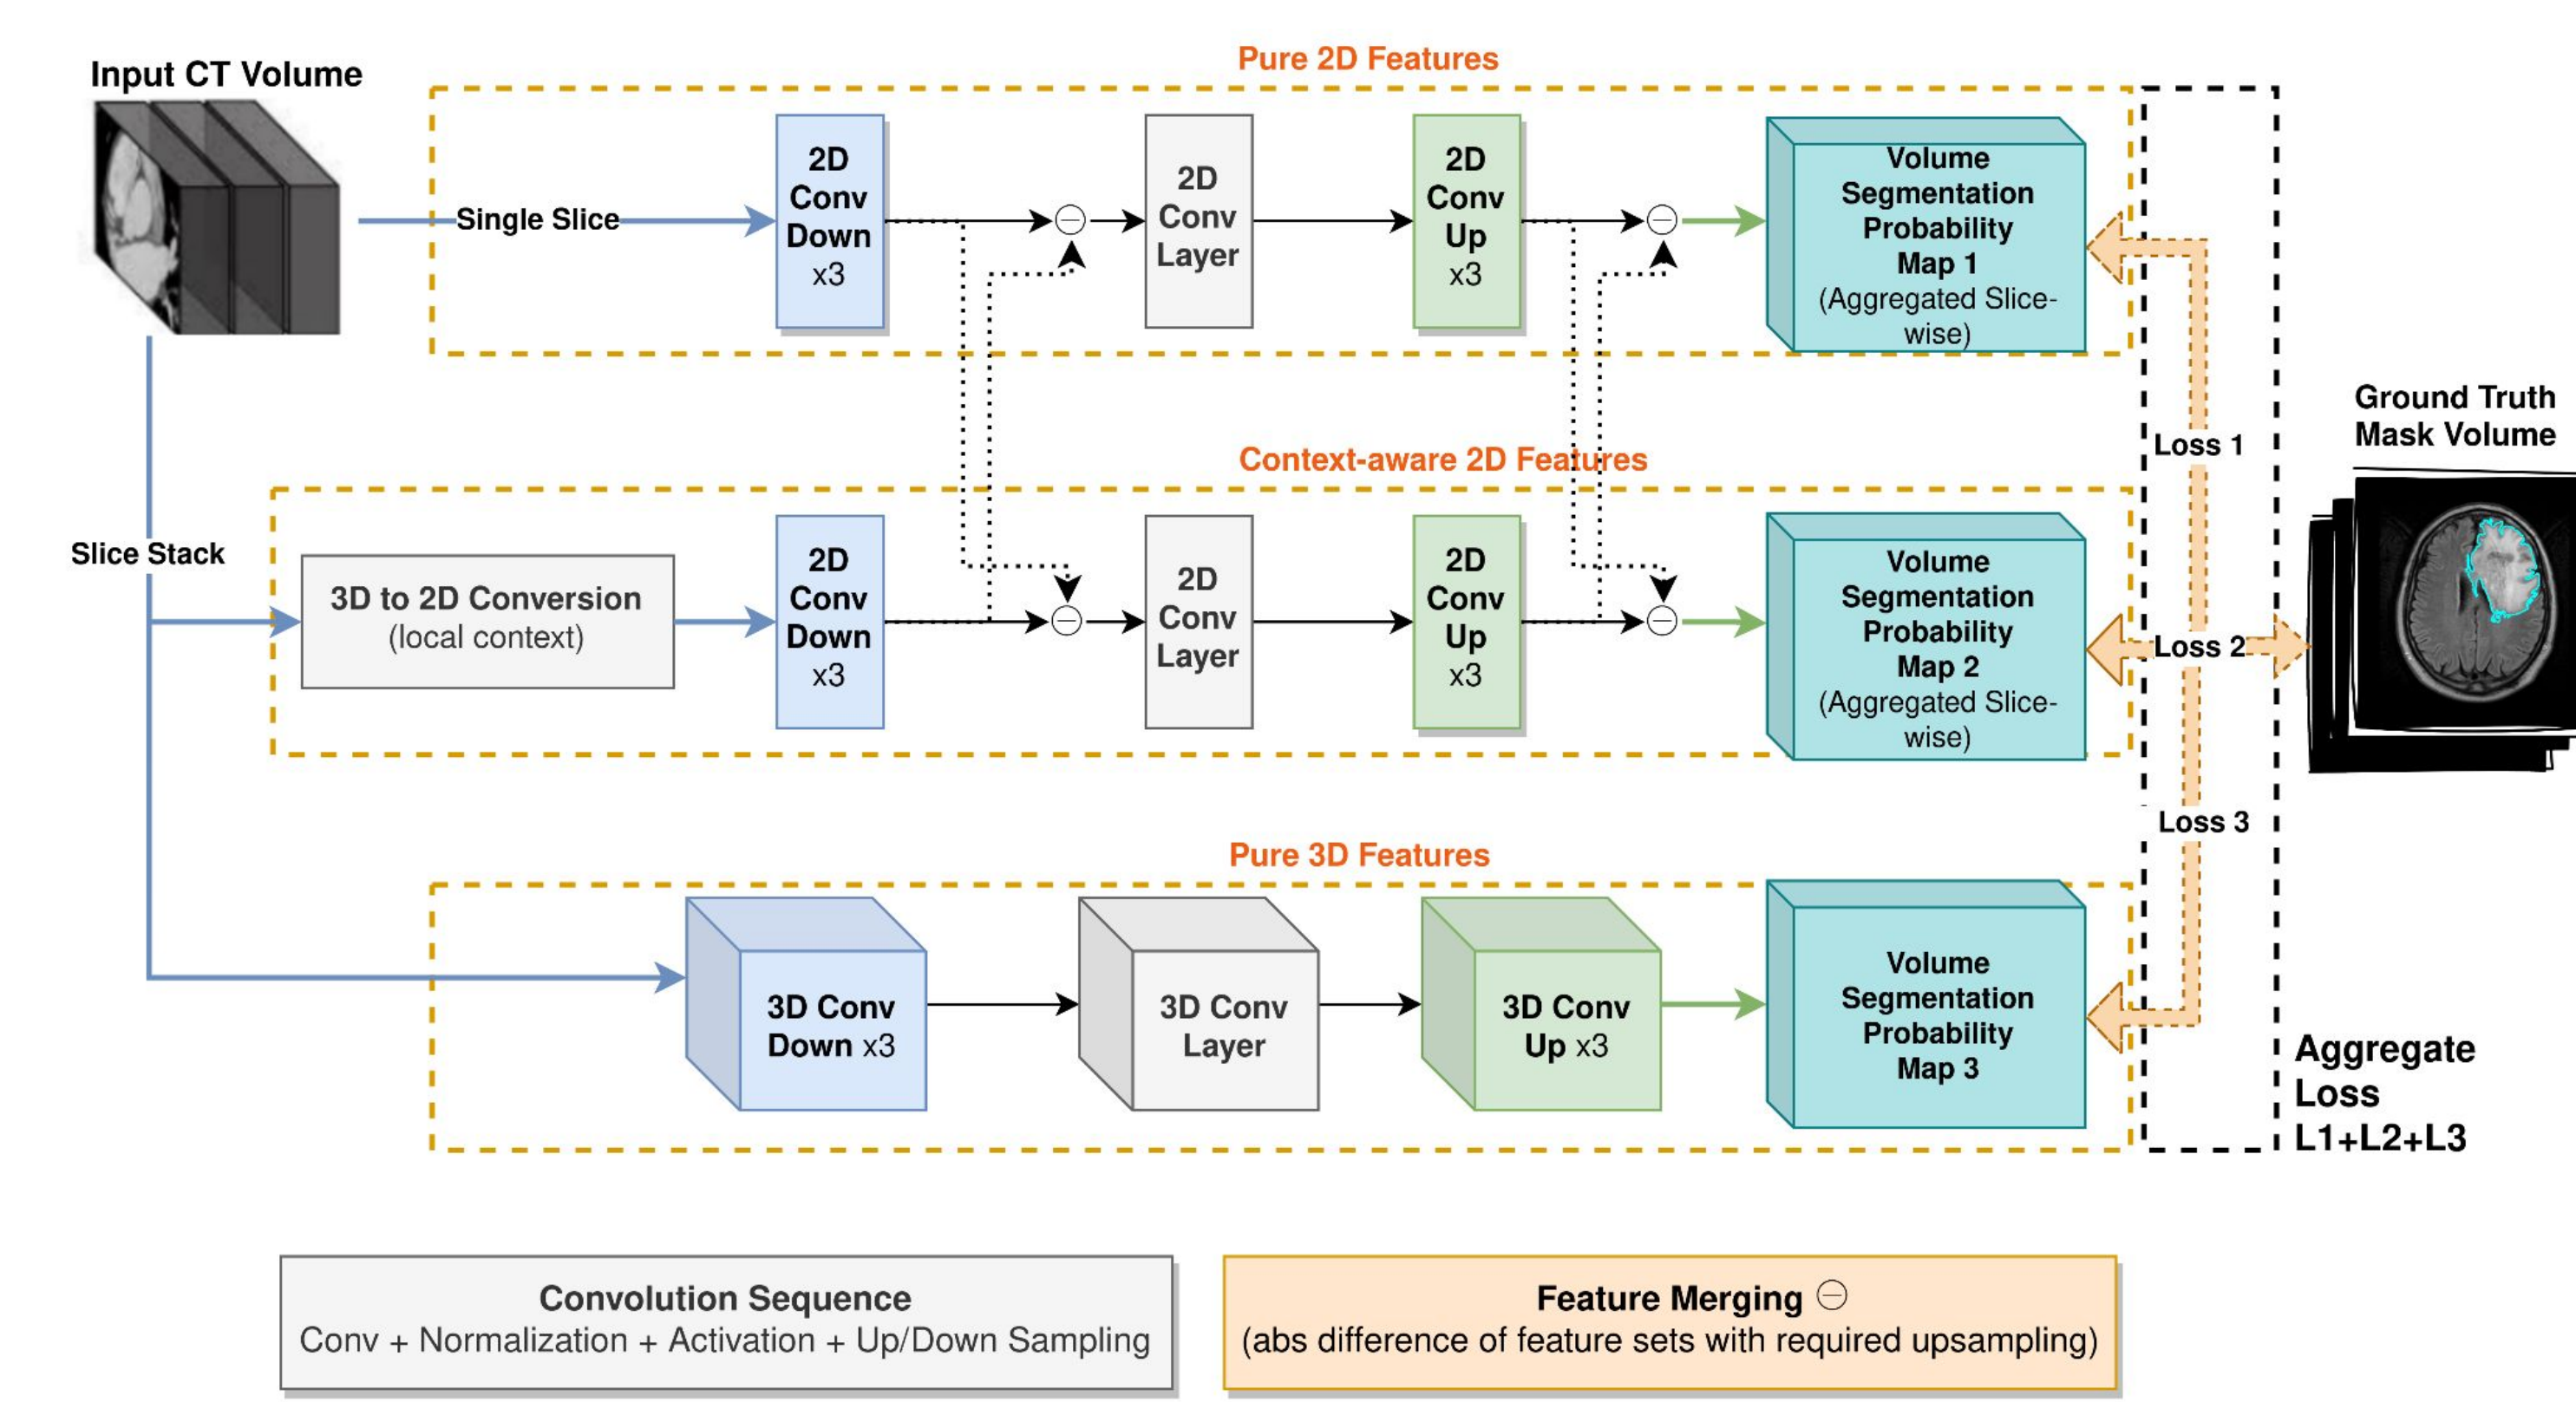


Figure 4. Proposed neural network for segmentation

Module 2: Enhanced Q-Learning for Path-planning

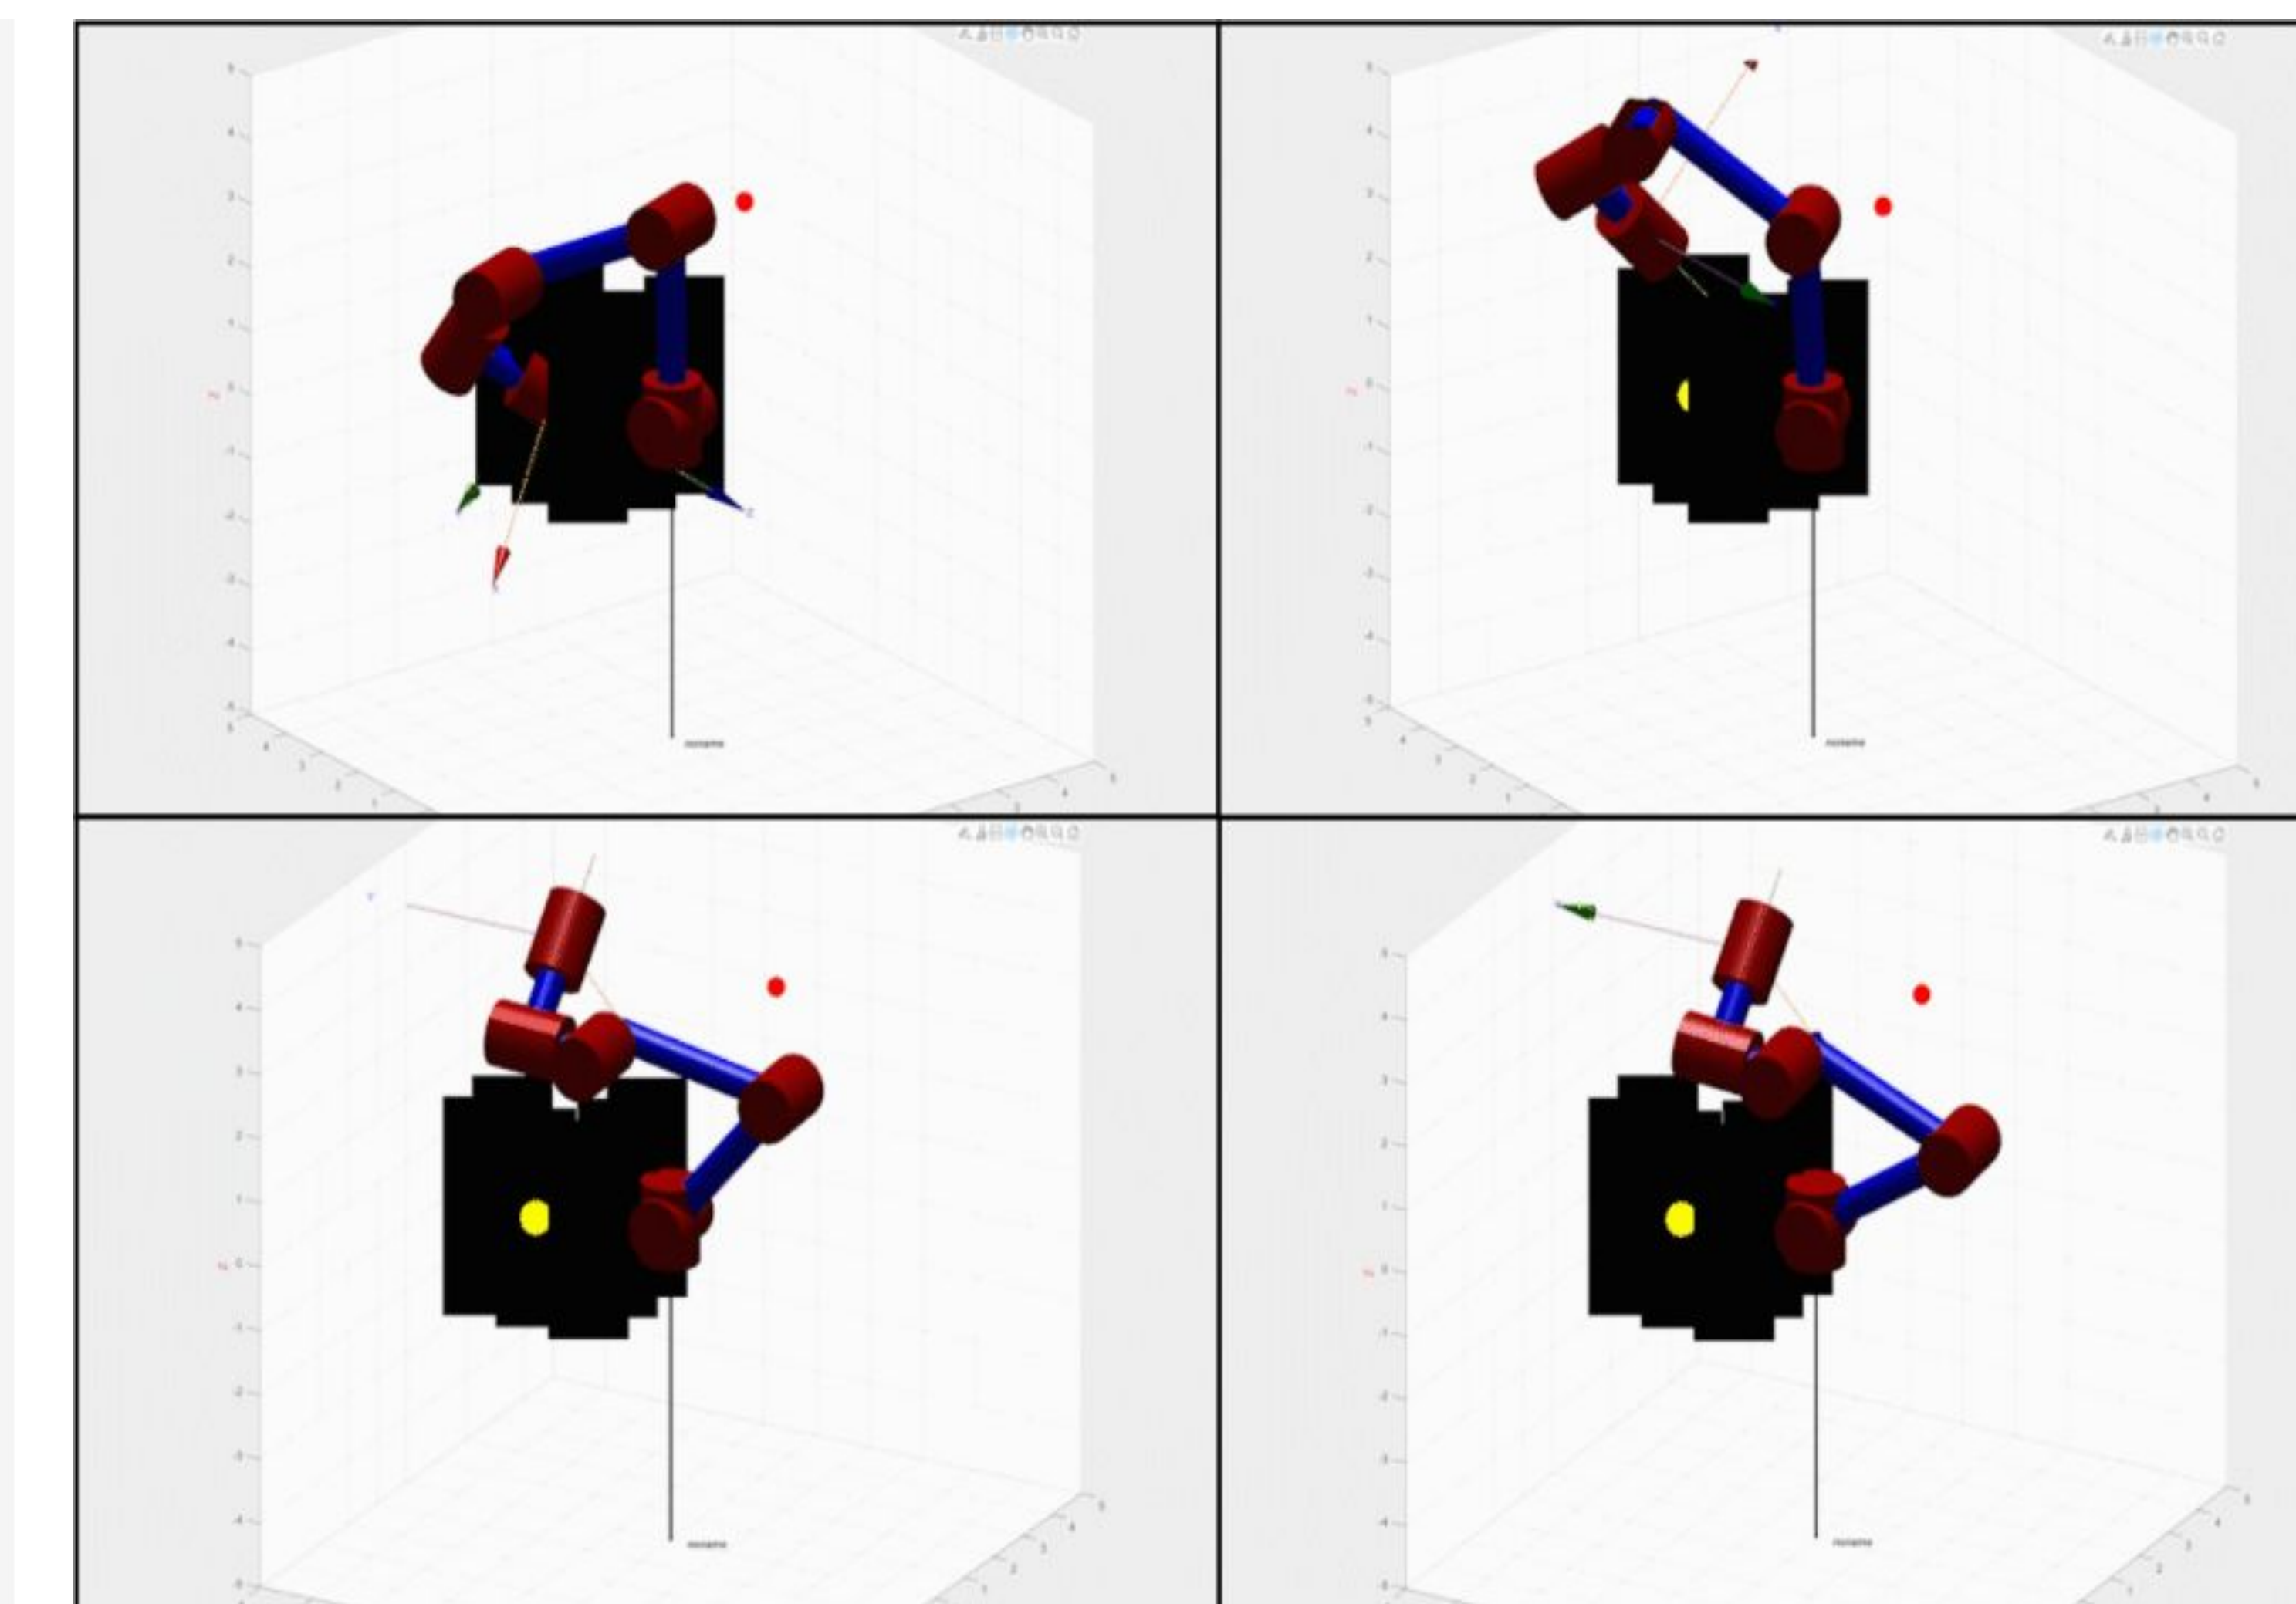


Figure 5. Intermediate steps of the robotic arm

$$P(\Delta E, T(t)) = \exp\left(-\frac{\Delta E}{T(t)}\right)$$

$$T(t) = T_0 \cdot \alpha^t$$

Equation 1. Simulated annealing for exploratory actions

$$\max \left(\max_{i=1}^n |u_i - v_i|, \left(\sum_{i=1}^n |u_i - v_i|^p \right)^{1/p} - \left(\sum_{i=1}^n |u'_i - v'_i|^p \right)^{1/p} \right)$$

$$||\text{current arm position} - \text{target}||^2 - ||\text{previous arm position} - \text{target}||^2$$

Equation 2. Novel distance metric for arm position

Performance Analysis

Approach	Backbone	Dataset	DSC	Mean IoU	AuROC
FPN	EffNet-B0	Peer-Reviewed Intracranial Hemorrhage Dataset Hssayeni et al. (2020)	41.18%	28.20%	-
UNet	EffNet-B0		46.73%	30.42%	-
PSPNet	DeepLabV3+		40.21%	27.51%	-
Best UNet *			33.82%	17.43%	-
AutoEncoder+ChanVese [2]*	M-Net		70%	-	-
Proposed			70.41%	59.95%	86.13%
			76.11%	64.52%	89.15%

Table 1. Quantitative comparison of segmentation

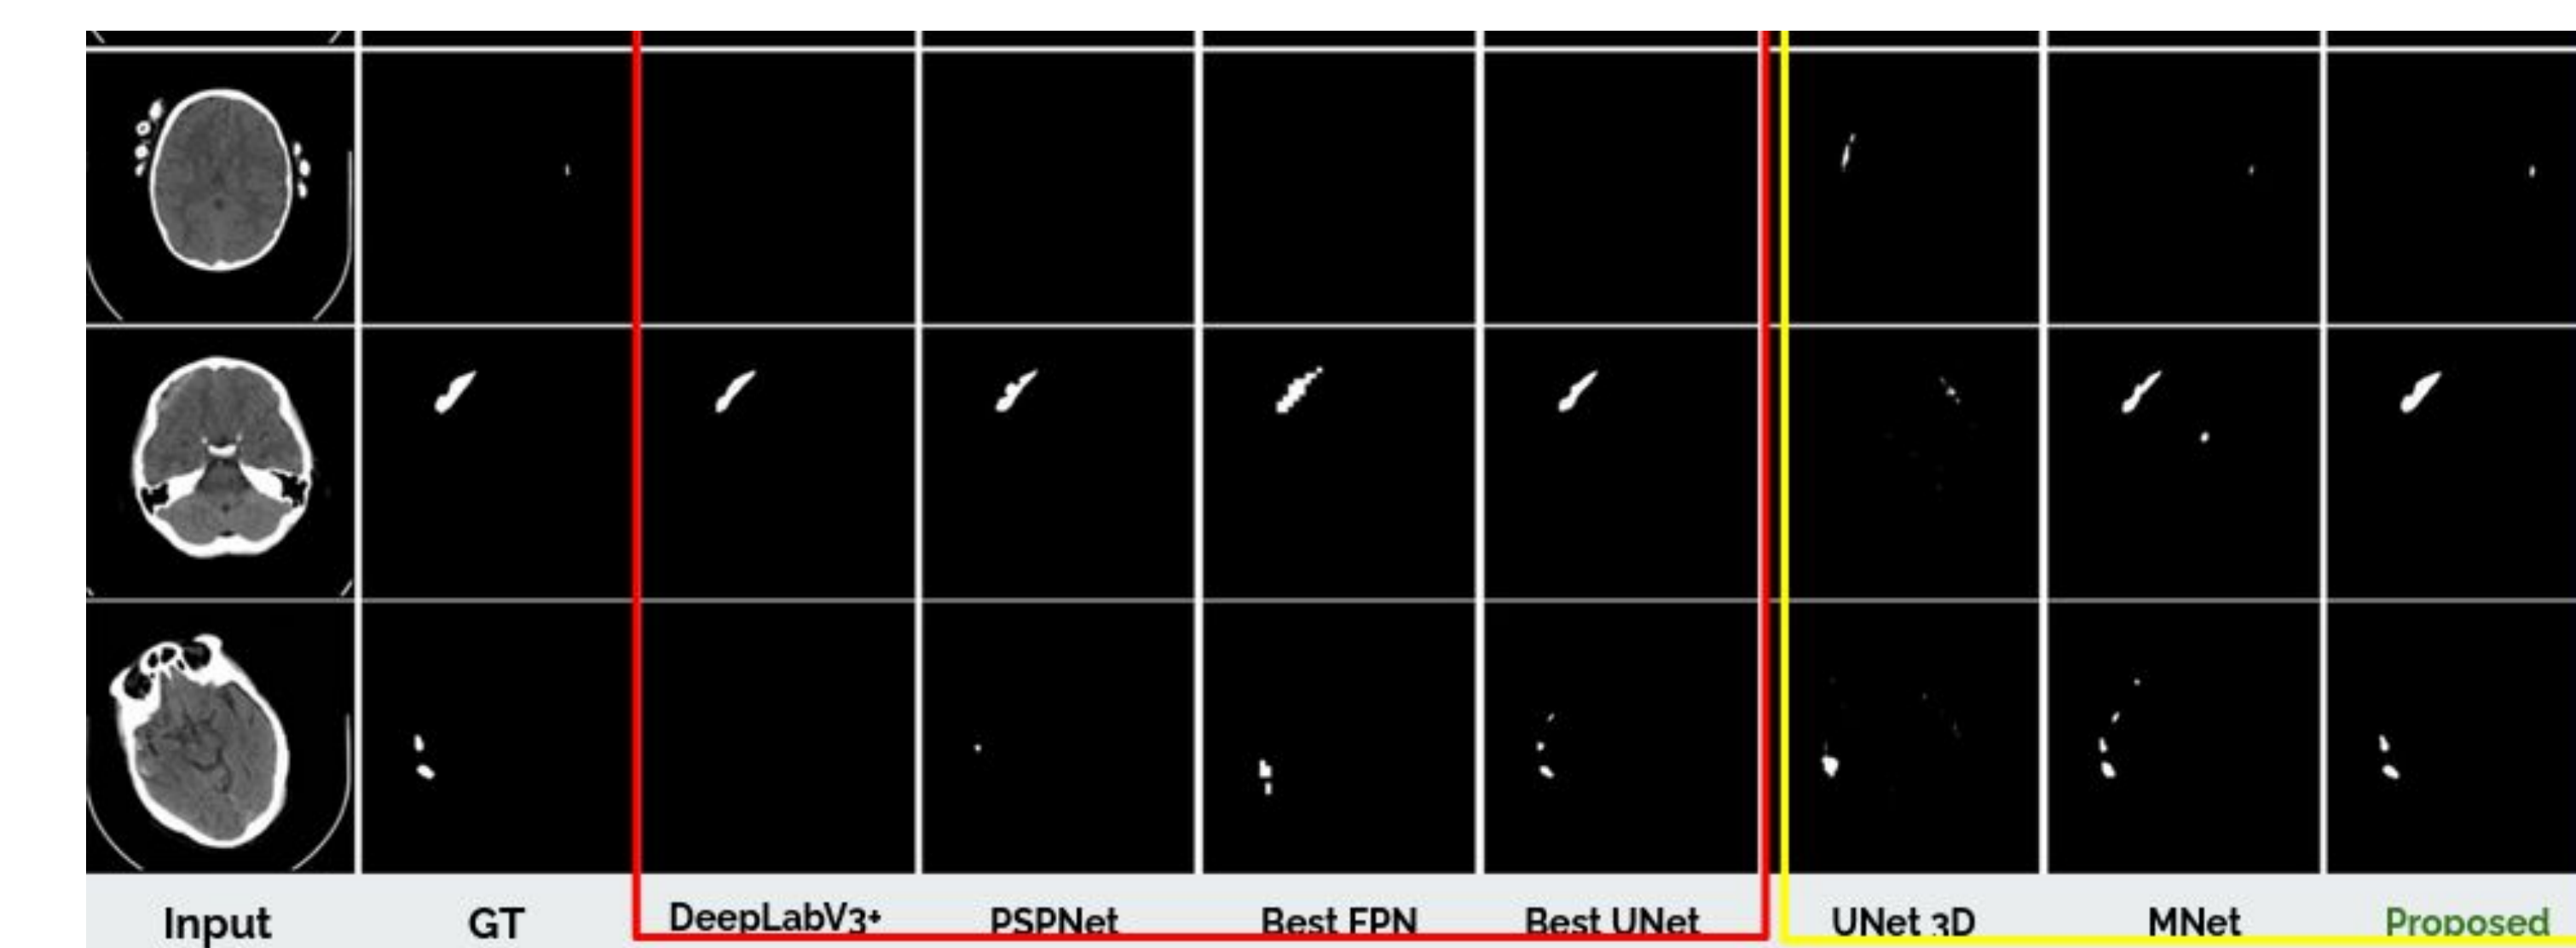


Figure 6. Qualitative comparison of segmentation

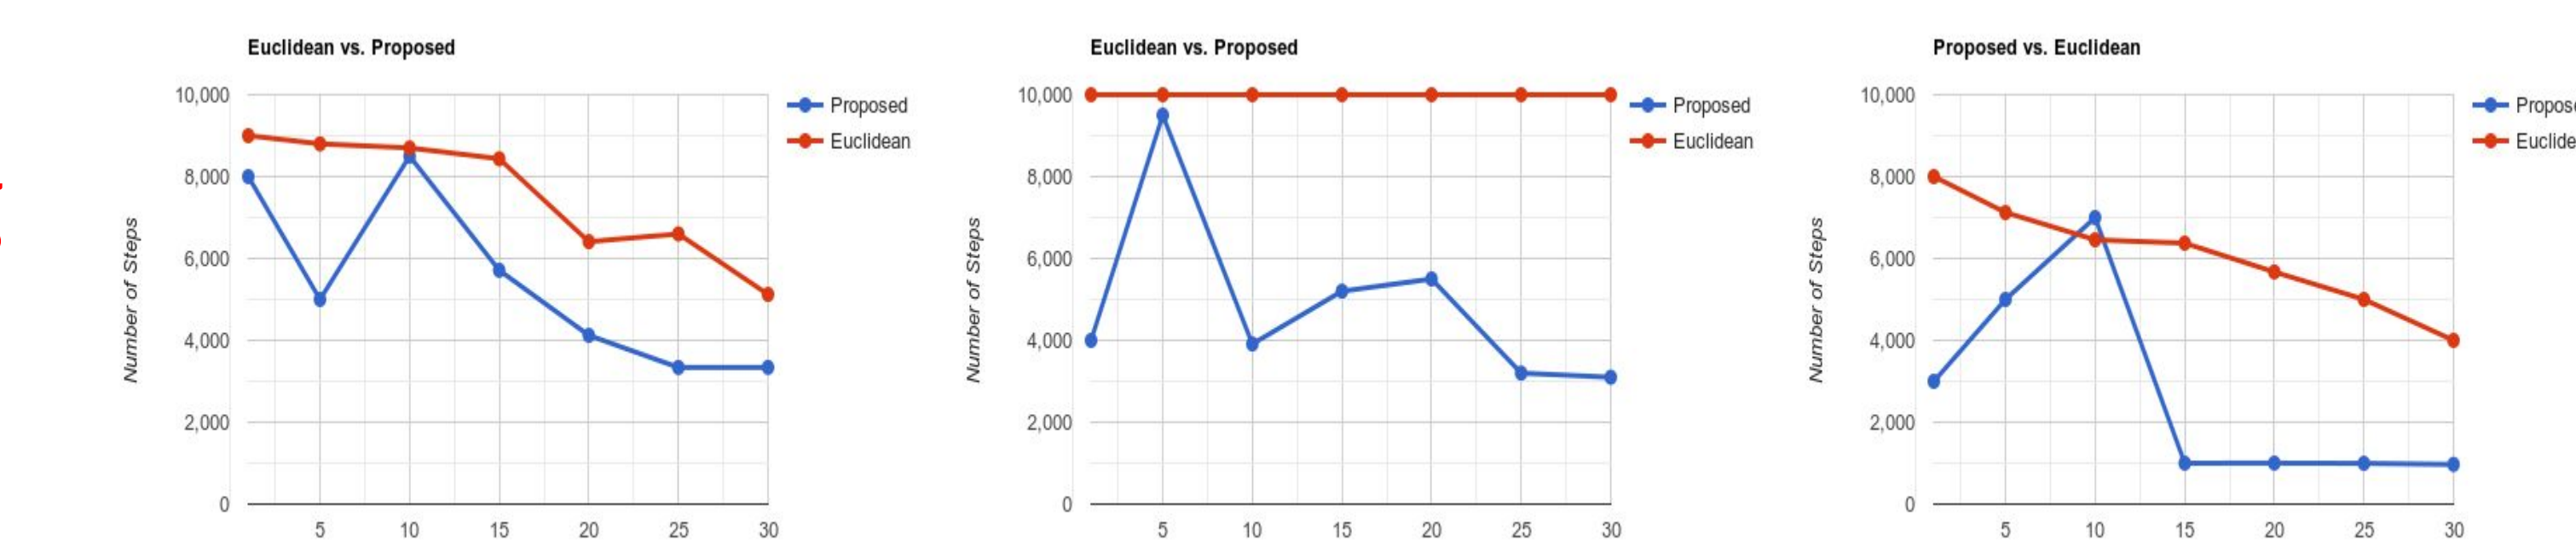


Figure 7. Performance of proposed distance metric

Inferences

- A novel neural network is proposed for segmenting stroke regions from NCCT volumes that leverages context-awareness and pure dimensional features.
- After analyzing multiple path-planning strategies, a modified Q-learning algorithm is proposed for robotic surgical interventions.
- A web-app was developed to visualize identified stroke regions and the planned robotic path.

References

- Murtadha Hssayeni, MS Croock, AD Salman, HF Al-khafaji, ZA Yahya, and B Ghoraani. Computed tomography images for intracranial hemorrhage segmentation. Intracranial Hemorrhage Segmentation Using A Deep Convolutional Model. Data, 5(1):179, 2020.
- Erdal Baskaran, Zafer Comert, and Yuksel C , elik. Convolutional neural network approach for automatic tympanic membrane detection and classification. Biomedical Signal Processing, 56:101734, 2020.