


| Feature | | | Scer | nario | | | Step | | |
|--------------------------|-------------|---|------|-------|---|----|------|---|---|
| Name | Duration | T | P | F | S | T | P | F | S |
| Login to HRM Application | 5 m 0.443 s | 5 | 3 | 2 | 0 | 15 | 13 | 2 | 0 |


| Tag | Scenario | | | Feature | | | | |
|---------------------|----------|---|---|---------|---|---|---|---|
| Name | T | P | F | S | T | P | F | S |
| @ValidCredentials | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |
| @InvalidCredentials | 3 | 3 | 0 | 0 | 1 | 0 | 1 | 0 |
| @MissingUsername | 1 | 0 | 1 | 0 | 1 | 0 | 1 | 0 |

FEATURES SUMMARY

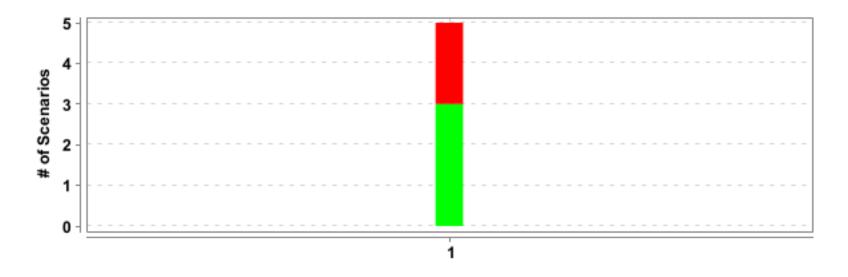

| # | Feature Name | T | P | F | S | Duration |
|---|--------------------------|---|---|---|---|-------------|
| 1 | Login to HRM Application | 5 | 3 | 2 | 0 | 5 m 0.443 s |


SCENARIOS SUMMARY -- 5 --

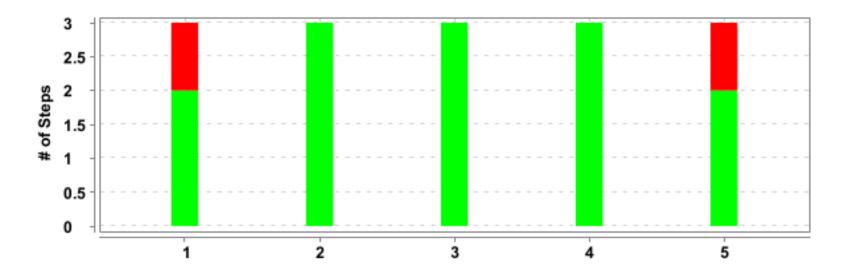


| # | Feature Name | Scenario Name | T | P | F | S | Duration |
|---|--------------------------|--------------------------------|---|---|---|---|-------------|
| 1 | Login to HRM Application | Login with valid credentials | 3 | 2 | 1 | 0 | 1 m 3.234 s |
| 2 | Login to HRM Application | Login with invalid credentials | 3 | 3 | 0 | 0 | 46.565 s |
| 3 | Login to HRM Application | Login with invalid credentials | 3 | 3 | 0 | 0 | 1 m 0.061 s |
| 4 | Login to HRM Application | Login with invalid credentials | 3 | 3 | 0 | 0 | 1 m 9.705 s |
| 5 | Login to HRM Application | Login with blank username | 3 | 2 | 1 | 0 | 1 m 0.665 s |

DETAILED SECTION -- 6 --

Login to HRM Application

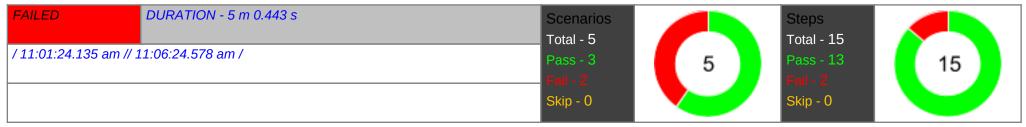


Login with valid credentials

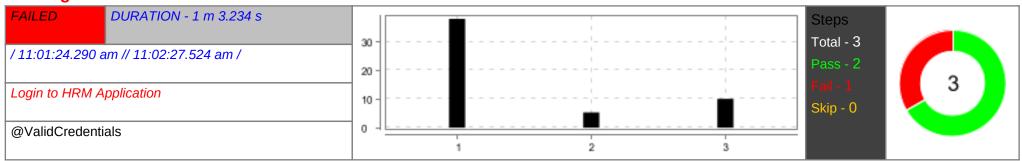

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/" | PASSED | 38.028 s |
| 2 | When User enters username as "Admin" and password as "admin123" | PASSED | 5.348 s |
| 3 | Then User should be able to login sucessfully and new page open | FAILED | 10.078 s |
| | org.openqa.selenium.NoSuchElementException: no such element: Unable to locate element: {"method":"xpath","selector":"//*[@id='app]/div[1]/div[2]/div[2]/div[1]/div[1]/div[1]/h5"} (Session info: chrome=115.0.5790.171) For documentation on this error, please visit: https://www.selenium.dev/documentation/webdriver/troubleshooting/errors#no-such-element-exception Build info: version: '4.10.0', revision: 'c14d967899' System info: os.name: "Windows 10', os.arch: 'amd64', os.version: '10.0', java. version: '16.0.2' Driver info: org.openqa.selenium.chrome.ChromeDriver Command: [a360975418213792f6ea225d02a6130a, findElement {using=xpath, value=//*[@id='app]/div[1]/div[2]/div[2]/div[1]/div[1]/h5}] Capabilities {acceptInsecureCerts: false, browserName: chrome, browserVersion: 115.0.5790.171, chrome: {chromedriverVersion: 114.0.5735.90 (386bc09e8f4f, userDataDir: C:\Users\mechk\AppData\Loca}, goog:chromeOptions: {debuggerAddress: localhost:63556}, networkConnectionEnabled: false, pageLoadStrategy: normal, platformName: windows, proxy: Proxy(), se:cdp: ws://localhost:63556/devtoo, se:cdpVersion: 115.0.5790.171, setWindowRect: true, strictFileInteractability: false, timeouts: {implicit: 0, pageLoad: 300000, script: 30000}, unhandledPromptBehavior: dismiss and notify, webauthn:extension:credBlob: true, webauthn:extension:minPinLength: true, webauthn:extension:prf: true, webauthn:virtualAuthenticators: true} Session ID: a360975418213792f6ea225d02a6130a at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(NativeConstructorAccessorImpl.java:78) at java.base/jdk.internal.reflect.NativeConstructorAccessorImpl.newInstance(DelegatingConstructorAccessorImpl.java:45) | | |


| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| | at java.base/java.lang.reflect.Constructor.newInstanceWithCaller(Constructor.java:499) | | |
| | at java.base/java.lang.reflect.Constructor.newInstance(Constructor.java:480) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.createException(W3CHttpResponseCodec.java:199) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:132) | | |
| | at org.openqa.selenium.remote.codec.w3c.W3CHttpResponseCodec.decode(W3CHttpResponseCodec.java:51) | | |
| | at org.openqa.selenium.remote.HttpCommandExecutor.execute(HttpCommandExecutor.java:191) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.invokeExecute(DriverCommandExecutor.java:196) | | |
| | at org.openqa.selenium.remote.service.DriverCommandExecutor.execute(DriverCommandExecutor.java:171) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.execute(RemoteWebDriver.java:531) | | |
| | at org.openqa.selenium.remote.ElementLocation\$ElementFinder\$2.findElement(ElementLocation.java:165) | | |
| | at org.openqa.selenium.remote.ElementLocation.findElement(ElementLocation.java:59) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:350) | | |
| | at org.openqa.selenium.remote.RemoteWebDriver.findElement(RemoteWebDriver.java:344) | | |
| | at org.openqa.selenium.support.pagefactory.DefaultElementLocator.findElement(DefaultElementLocator.java:68) | | |
| | at org.openqa.selenium.support.pagefactory.internal.LocatingElementHandler.invoke(LocatingElementHandler.java:38) | | |
| | at jdk.proxy2/jdk.proxy2.\$Proxy25.getText(Unknown Source) | | |
| | at com.example.actions.HomePageActions.getHomePageText(HomePageActions.java:22) | | |
| | at com.example.definitions.LoginPageDefinitions.verifyLogin(LoginPageDefinitions.java:40) | | |
| | at ?.User should be able to login sucessfully and new page open(file:///C:/Users/mechk/Downloads/Cucumber-ExtentReport4-master/ | | |
| | POM_CucumberJunitDemo/src/test/resources/features/LoginPage.feature:10) | | |
| | * Not displayable characters are replaced by '?'. | | |
| | AFTER - com.example.definitions.Hooks.tearDown(io.cucumber.java.Scenario) | PASSED | 0.652 s |
| | Login with valid credentials | | |
| | | | |
| | | | |
| | | | |
| | ∆ No. 2 No. 2 No. 2 No. 2 No. 3 No. | | |
| | E SANCATOR D BANKSCHAM D BANKS | | |
| | The contraction of the contracti | | |

Login with invalid credentials

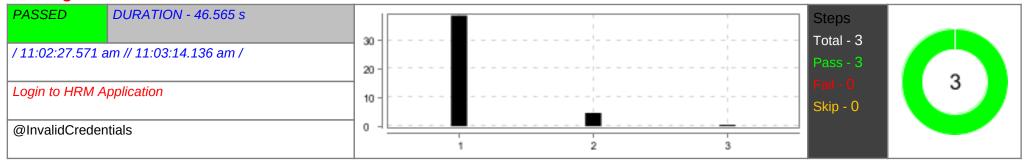


| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/" | PASSED | 38.675 s |
| 2 | When User enters username as "Admin" and password as "admin12\$\$" | PASSED | 4.656 s |
| 3 | Then User should be able to see error message "Invalid credentials" | PASSED | 0.434 s |

Login with invalid credentials

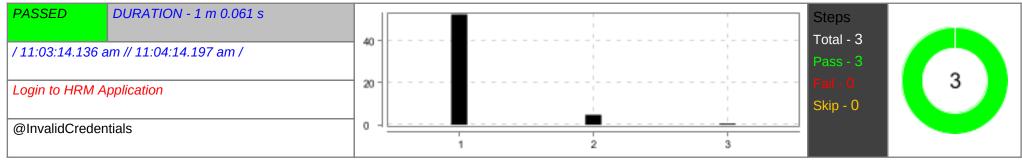

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/" | PASSED | 52.625 s |
| 2 | When User enters username as "admin\$\$" and password as "admin123" | PASSED | 4.761 s |
| 3 | Then User should be able to see error message "Invalid credentials" | PASSED | 0.521 s |


Login with invalid credentials

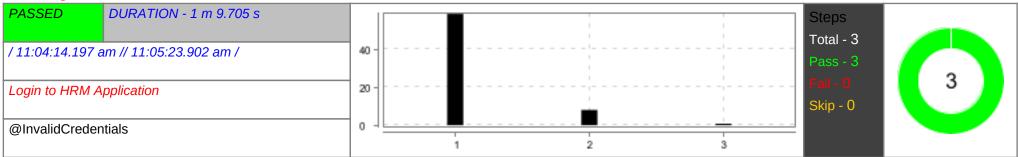

| # | Step / Hook Details | Status | Duration |
|---|---|--------|----------|
| 1 | Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/" | PASSED | 58.847 s |
| 2 | When User enters username as "abc123" and password as "xyz\$\$" | PASSED | 8.040 s |
| 3 | Then User should be able to see error message "Invalid credentials" | PASSED | 0.818 s |

DETAILED SECTION -- 9 --

Login with blank username

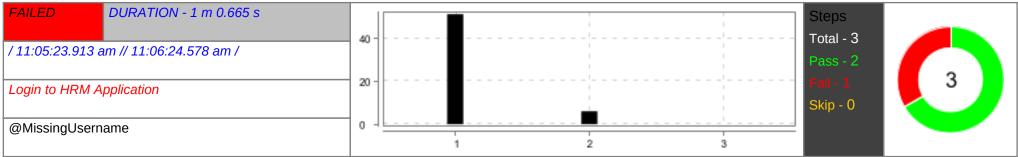

| # | Step / Hook Details | Status | Duration |
|---|--|--------|----------|
| 1 | Given User is on HRMLogin page "https://opensource-demo.orangehrmlive.com/" | PASSED | 51.235 s |
| 2 | When User enters username as " " and password as "admin123" | PASSED | 6.056 s |
| 3 | Then User should be able to see a message "Required1" below Username | FAILED | 0.039 s |
| | org.junit.ComparisonFailure: expected: <required[]> but was:<required[1]> at org.junit.Assert.assertEquals(Assert.java:117) at org.junit.Assert.assertEquals(Assert.java:146) at com.example.definitions.LoginPageDefinitions.verifyMissingUsernameMessage(LoginPageDefinitions.java:55) at ?.User should be able to see a message "Required1" below Username(file:///C:/Users/mechk/Downloads/Cucumber-ExtentReport4-master/POM_CucumberJunitDemo/src/test/resources/features/LoginPage.feature:29) * Not displayable characters are replaced by '?'.</required[1]></required[]> | | |
| | AFTER - com.example.definitions.Hooks.tearDown(io.cucumber.java.Scenario) Login with blank username | PASSED | 1.194 s |
| | Legit Total Control C | | |