

# Karthikeyan Chellamuthu 11.2.1 Exercise Machine Learning

Karthikeyan Chellamuthu

03/05/2022

## Structure of binary classifier


```
## 'data.frame':    1498 obs. of  3 variables:  
## $ label: int  0 0 0 0 0 0 0 0 0 ...  
## $ x : num  70.9 75 73.8 66.4 69.1 ...  
## $ y : num  83.2 87.9 92.2 81.1 84.5 ...
```

## Structure of trinary classifier


```
## 'data.frame':    1568 obs. of  3 variables:  
## $ label: int  0 0 0 0 0 0 0 0 0 ...  
## $ x : num  30.1 31.3 34.1 32.6 34.7 ...  
## $ y : num  39.6 51.8 49.3 41.2 45.5 ...
```

##11.2.a Plot the data from each dataset using a scatter plot.

Scatter plot: Binary Classifier Data

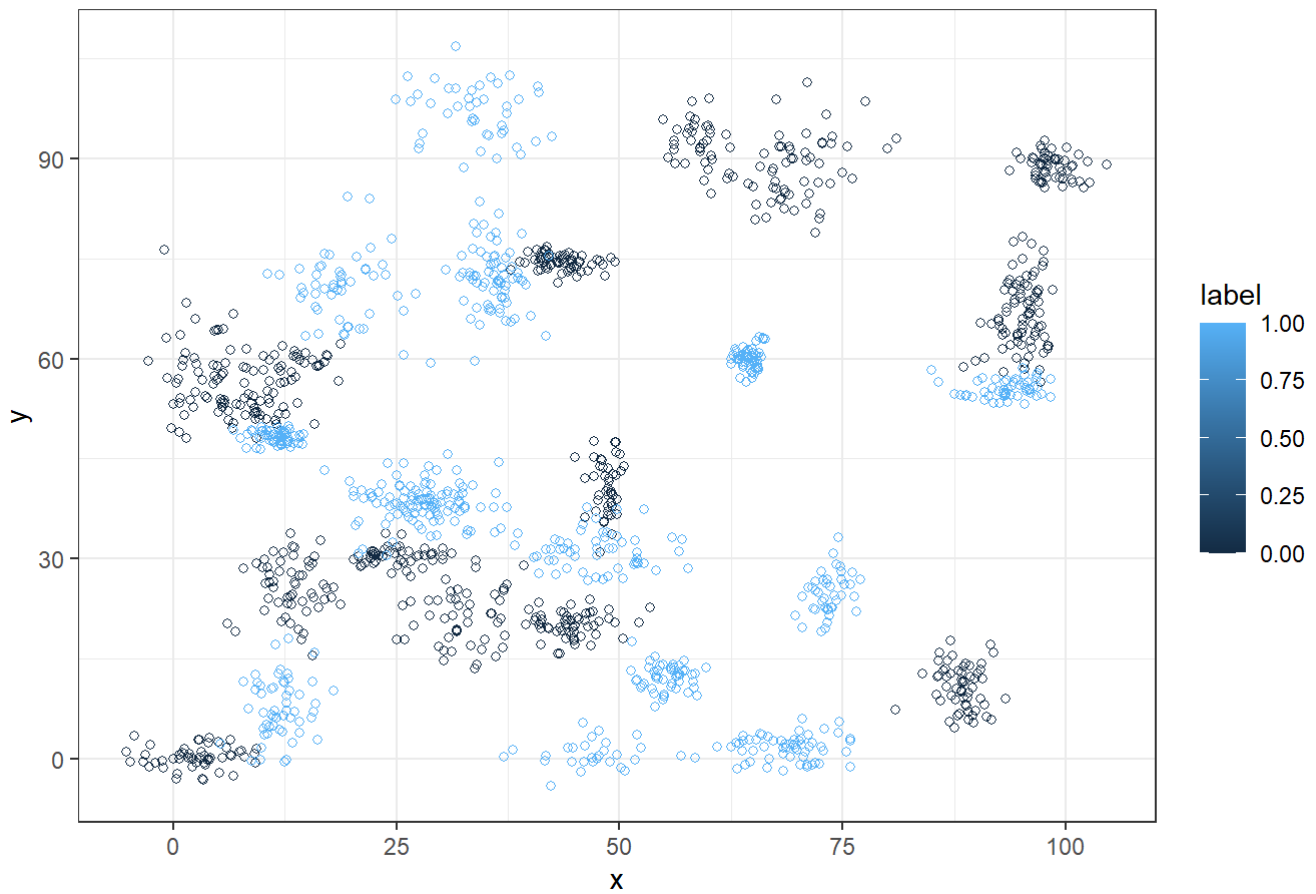


Scatter plot: Trinary Classifier Data

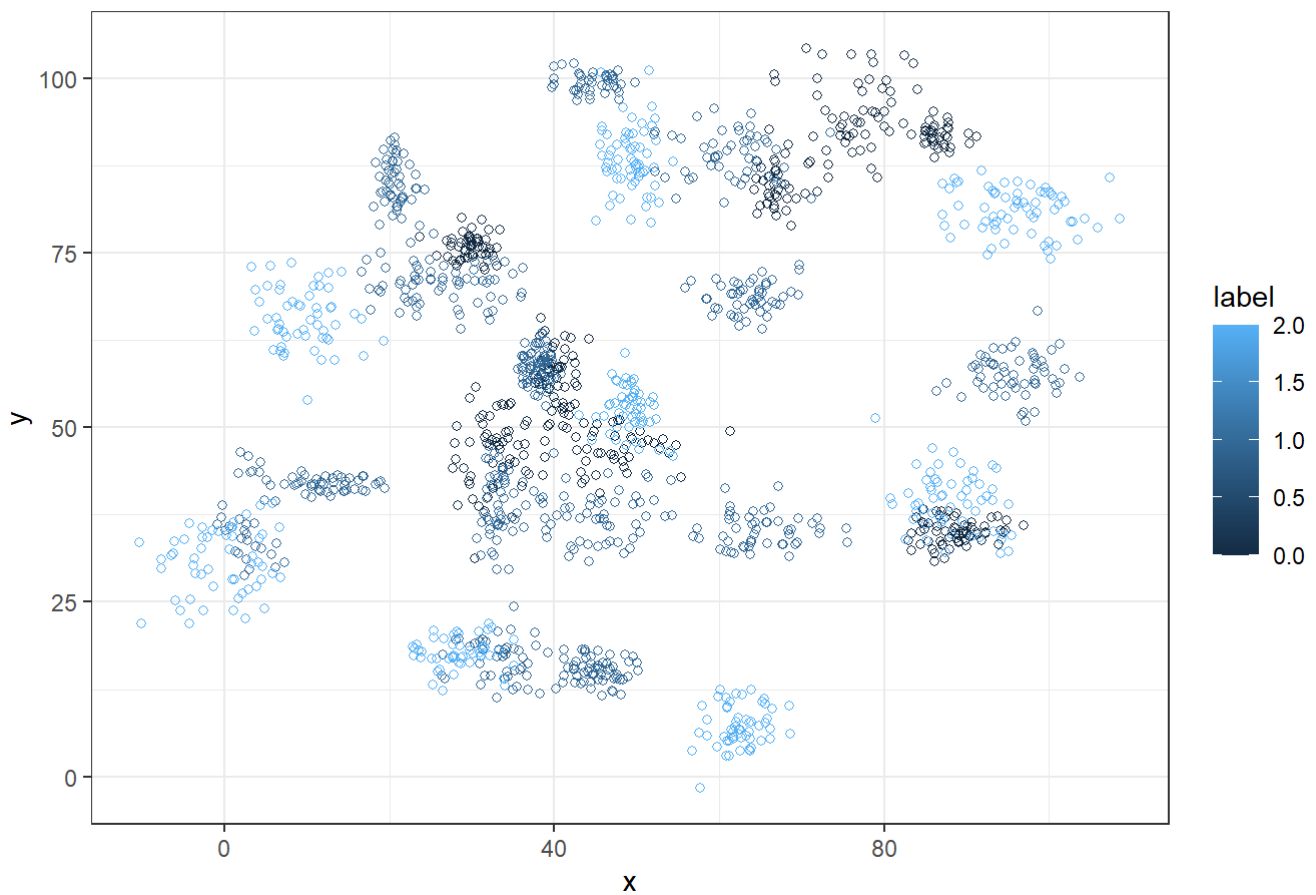


11.2.b Fit a k nearest neighbors model for each dataset for  $k=3$ ,  $k=5$ ,  $k=10$ ,  $k=15$ ,  $k=20$ , and  $k=25$ . Compute the accuracy of the resulting models for each value of  $k$ . Plot the results in a graph where the x-axis is the different values of  $k$  and the y-axis is the accuracy of the model.

kNN Model Accuracy Plot: Binary classifier

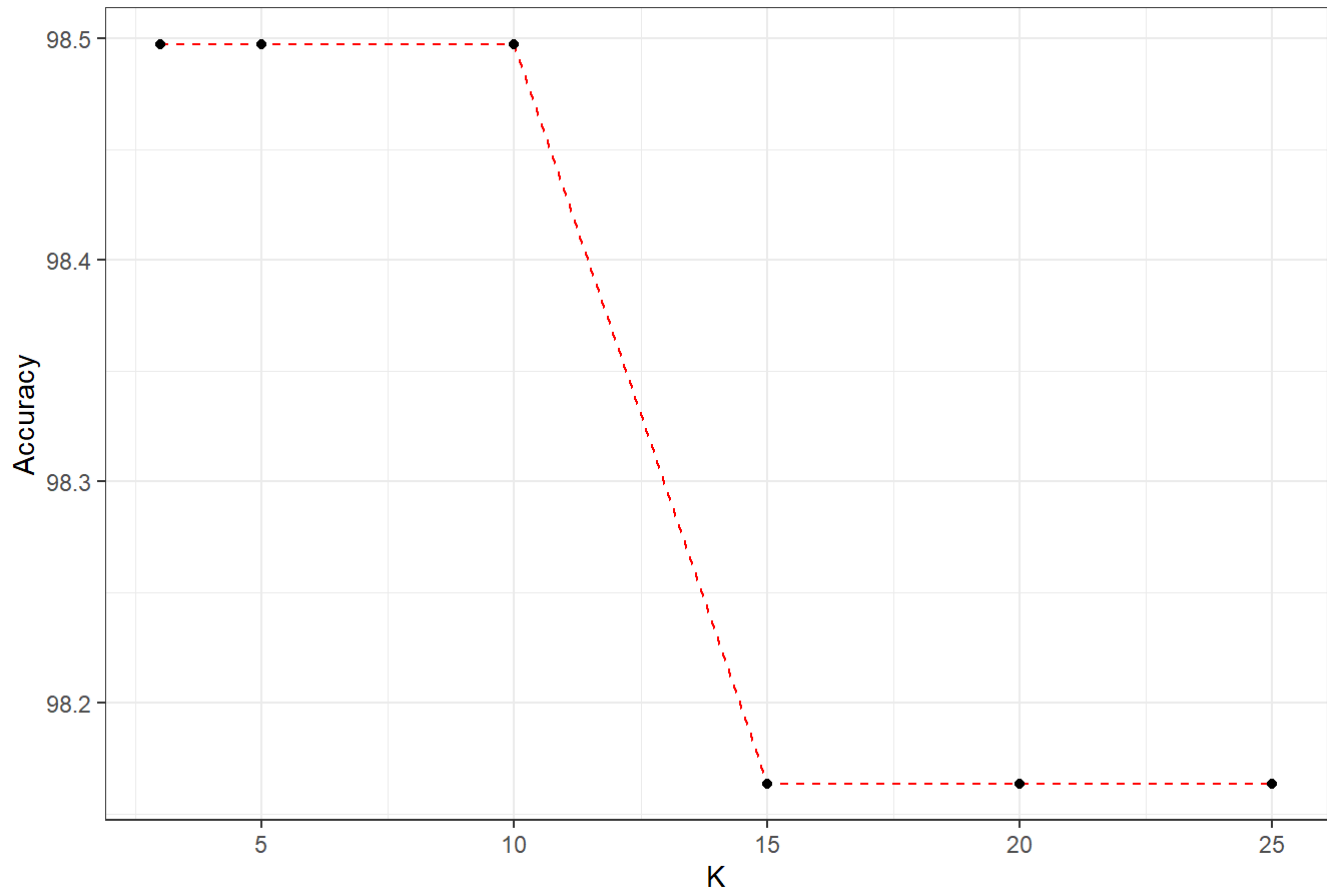

kNN Model Accuracy Plot: Trinary classifier

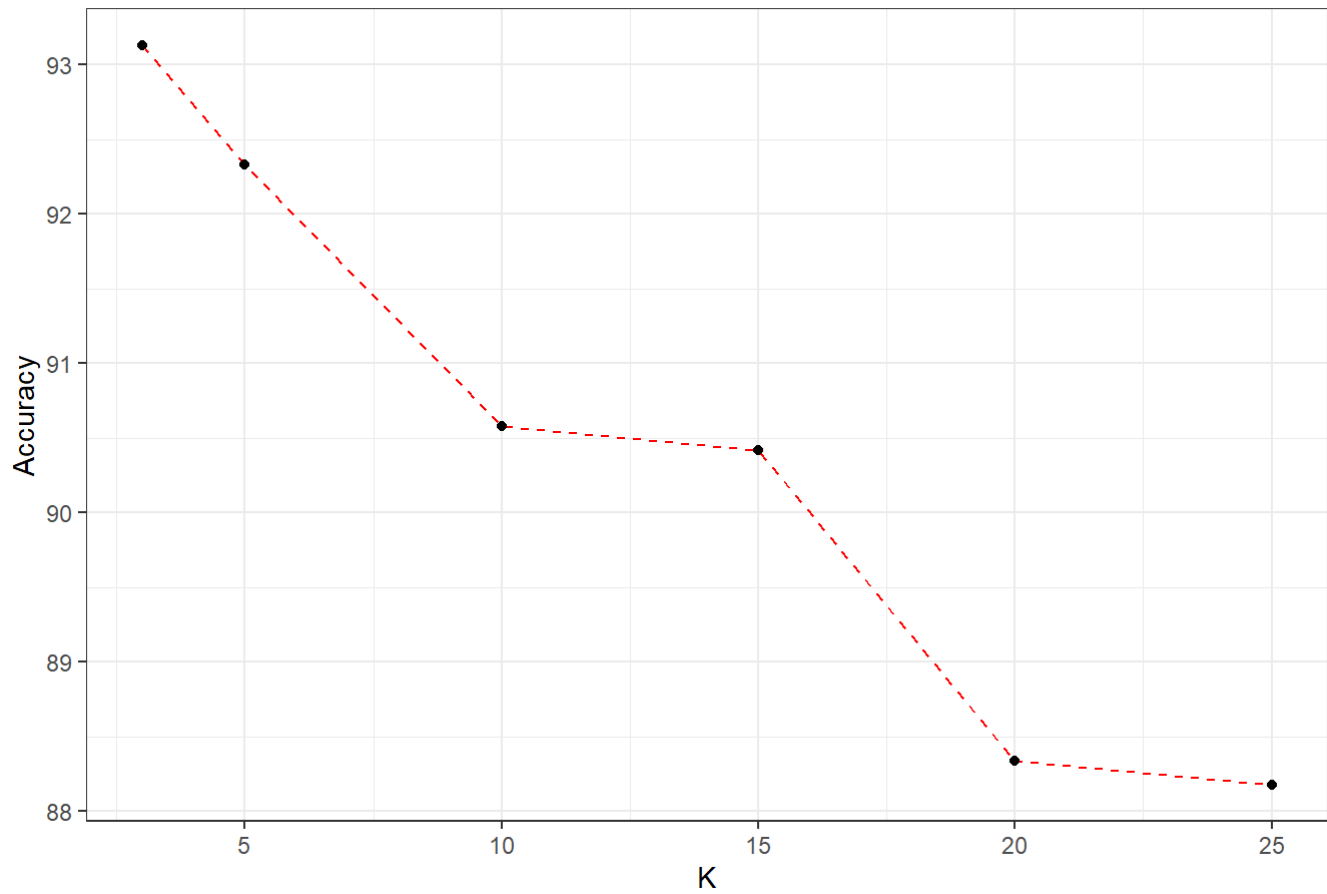

## 11.2.c Looking back at the plots of the data, do you think a linear classifier would work well on these datasets?

I don't believe linear classifier would work on these datasets. Scatter plot on these datasets shows the same.