



PROJECT EXPLANATION

PROJECT ARCHITECTURE:

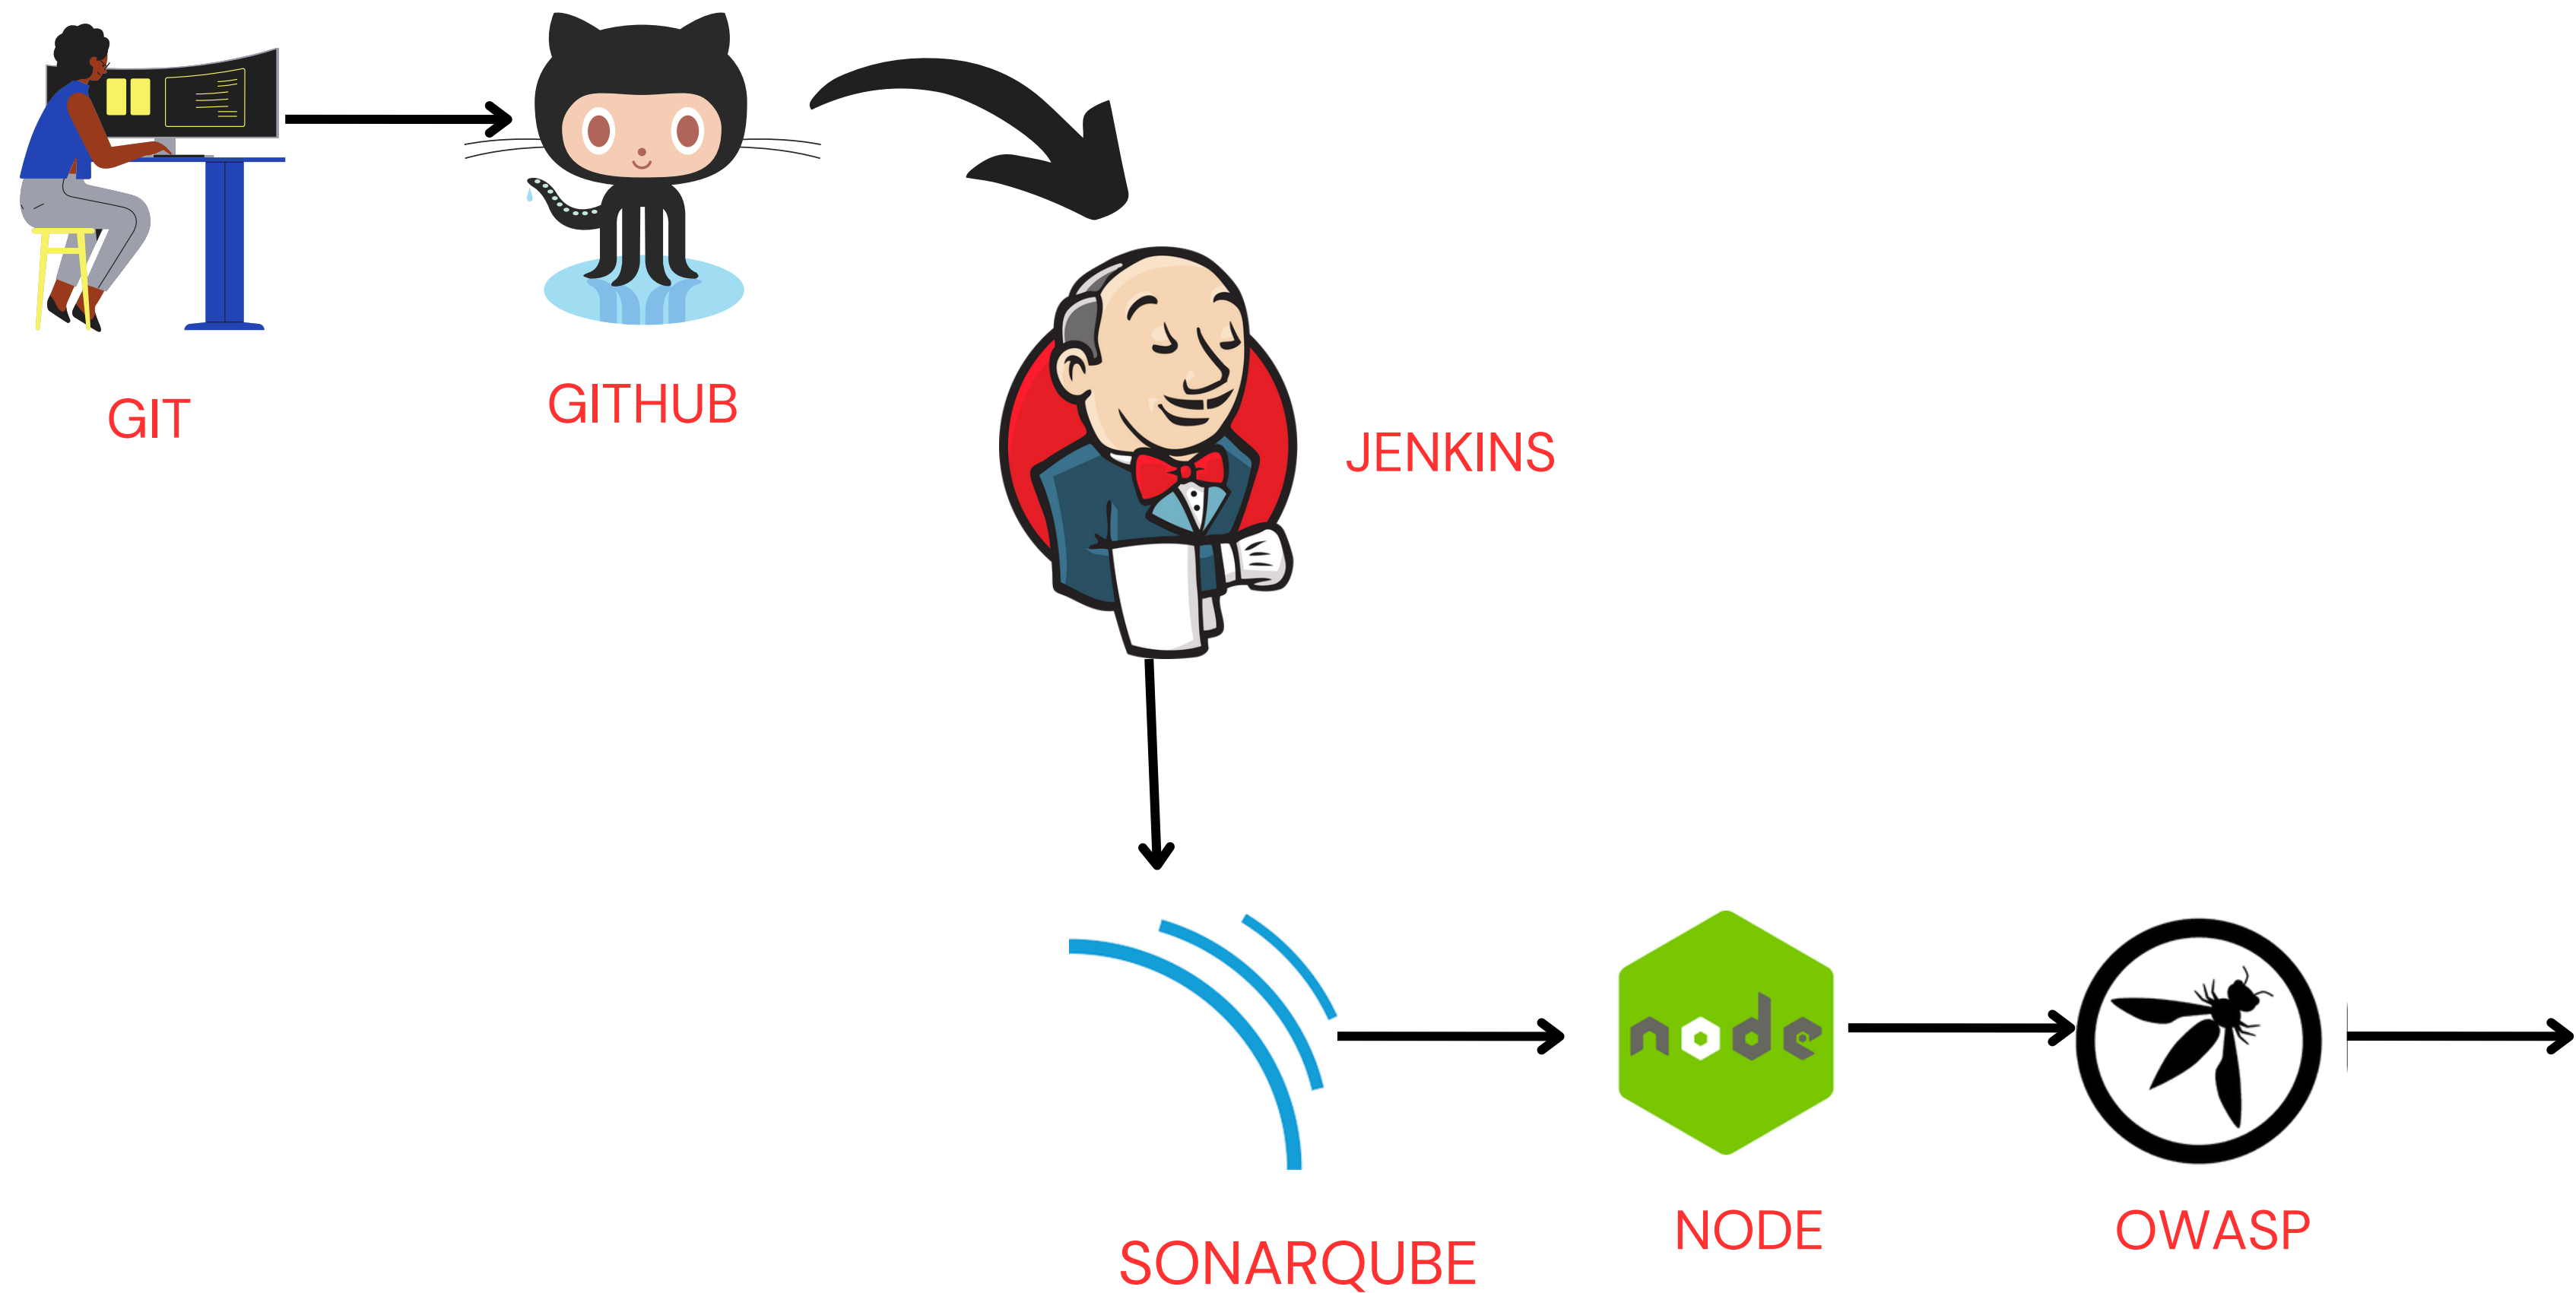

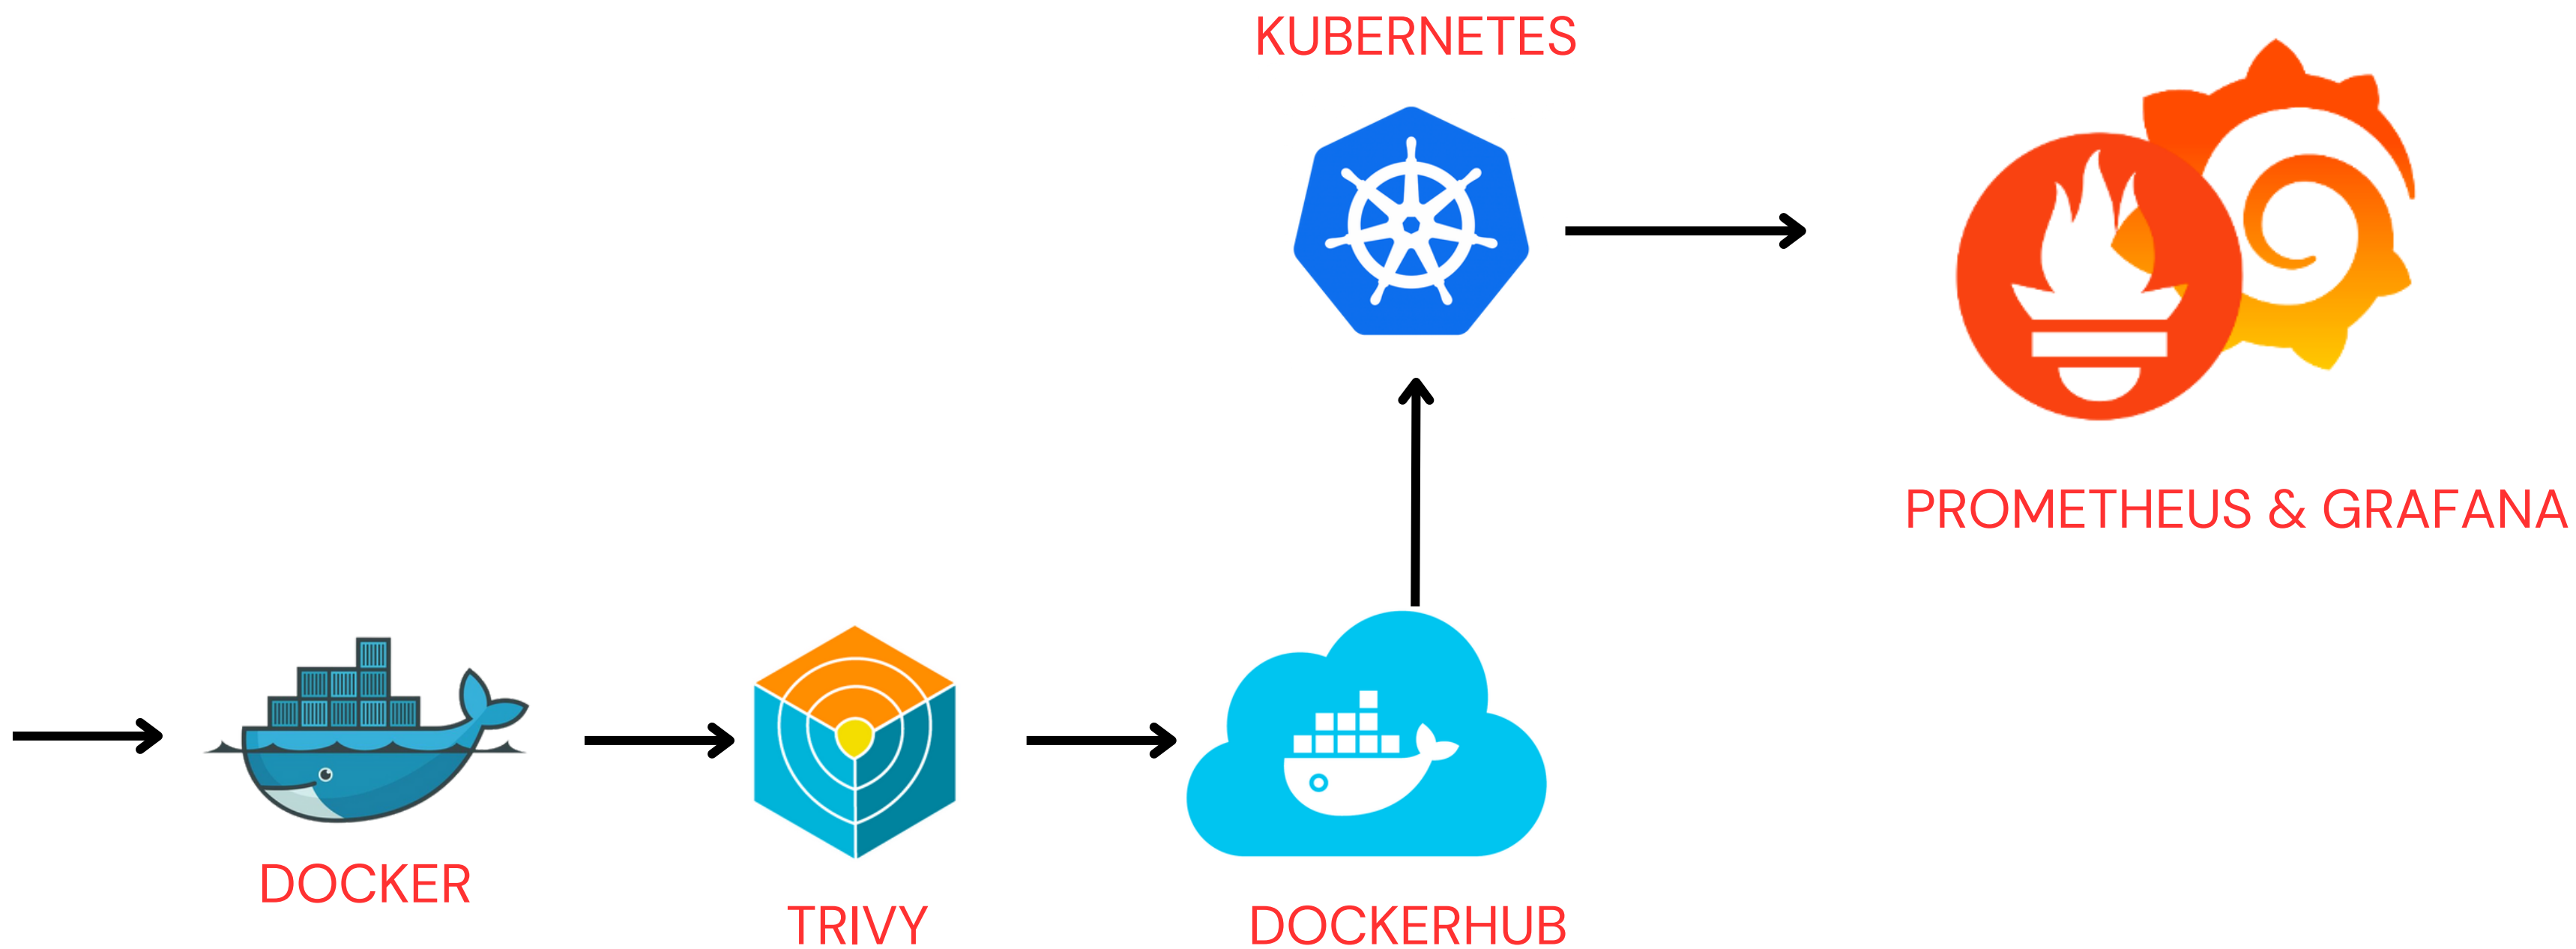


PIPELINE STAGES:


REACT APPLICATION



JAVA APPLICATION



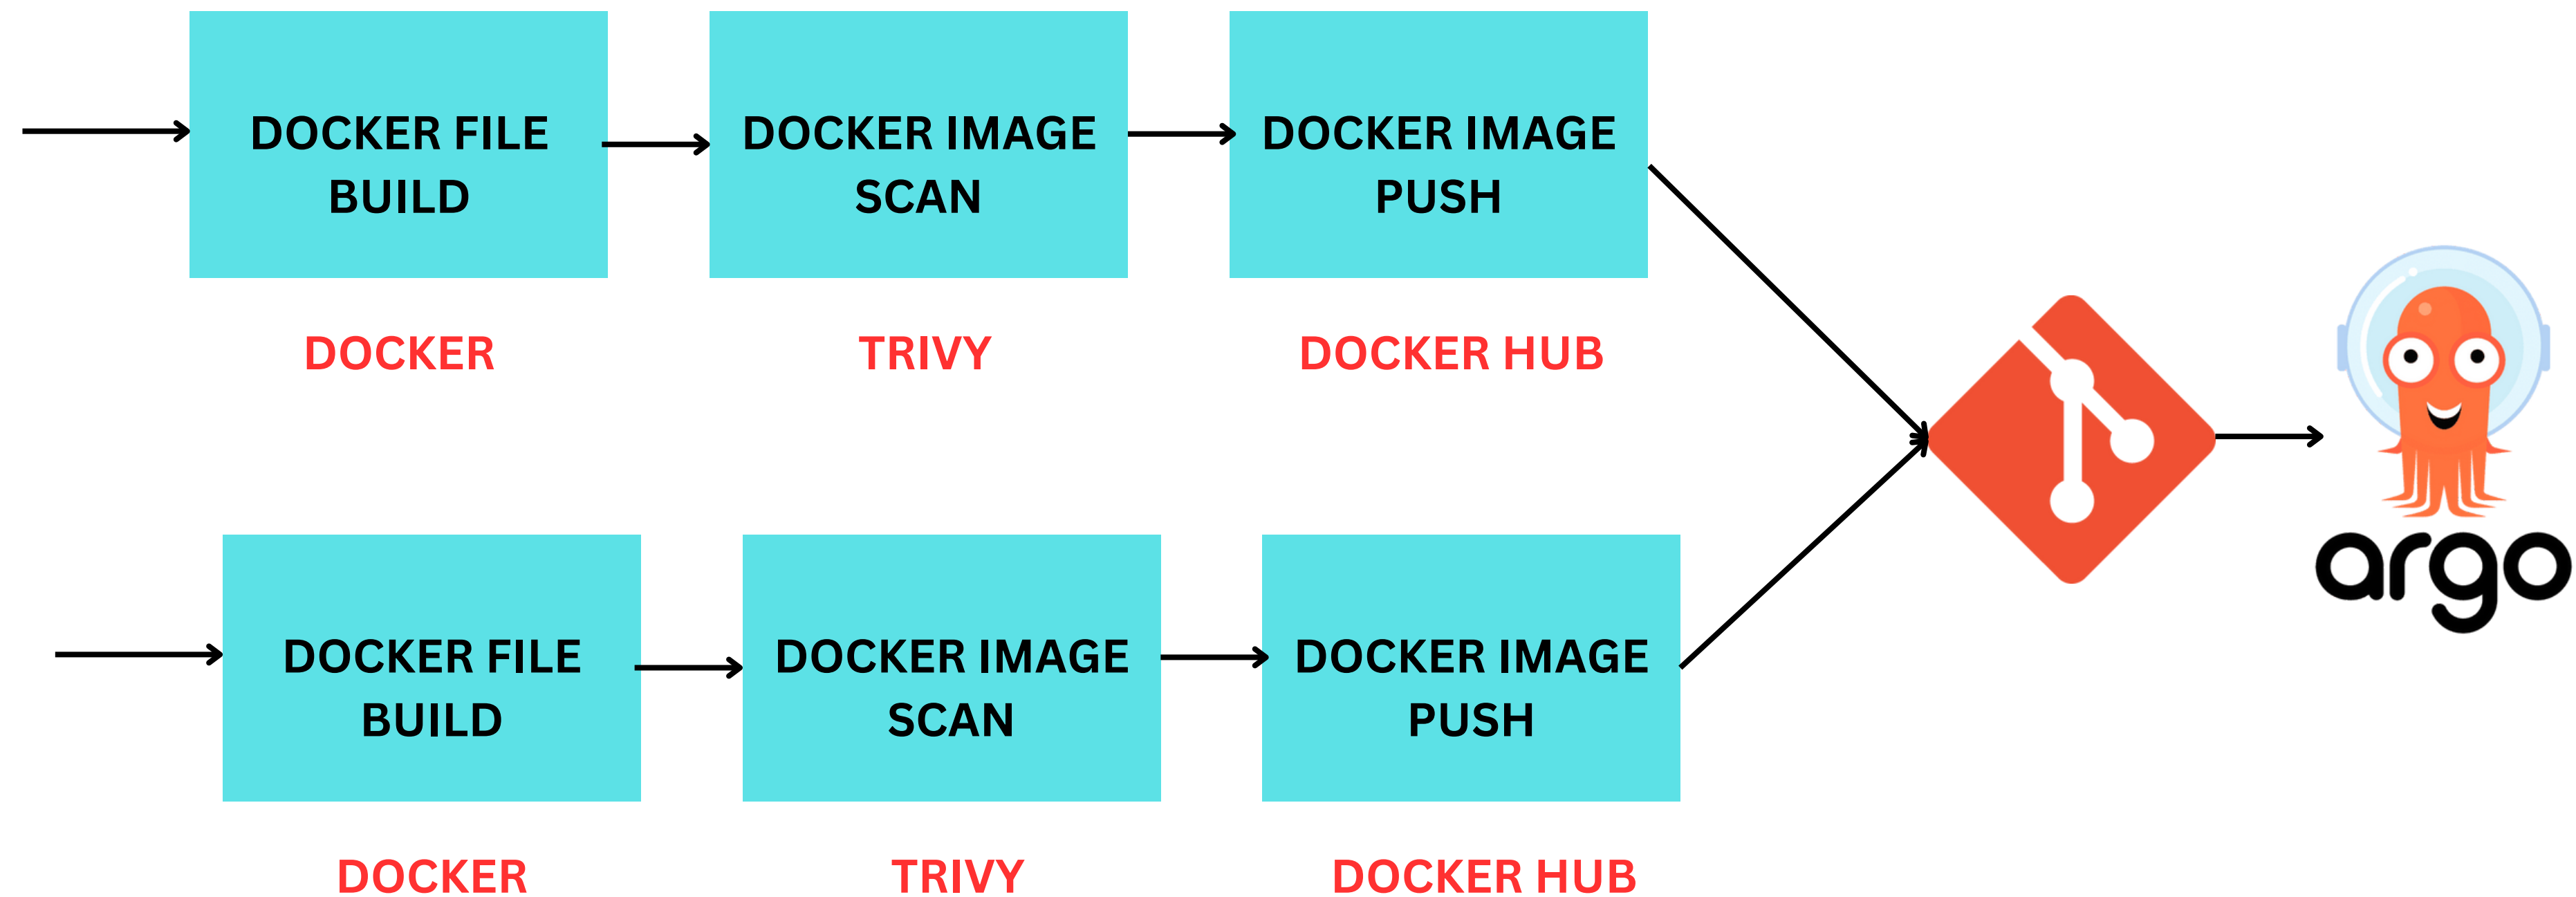

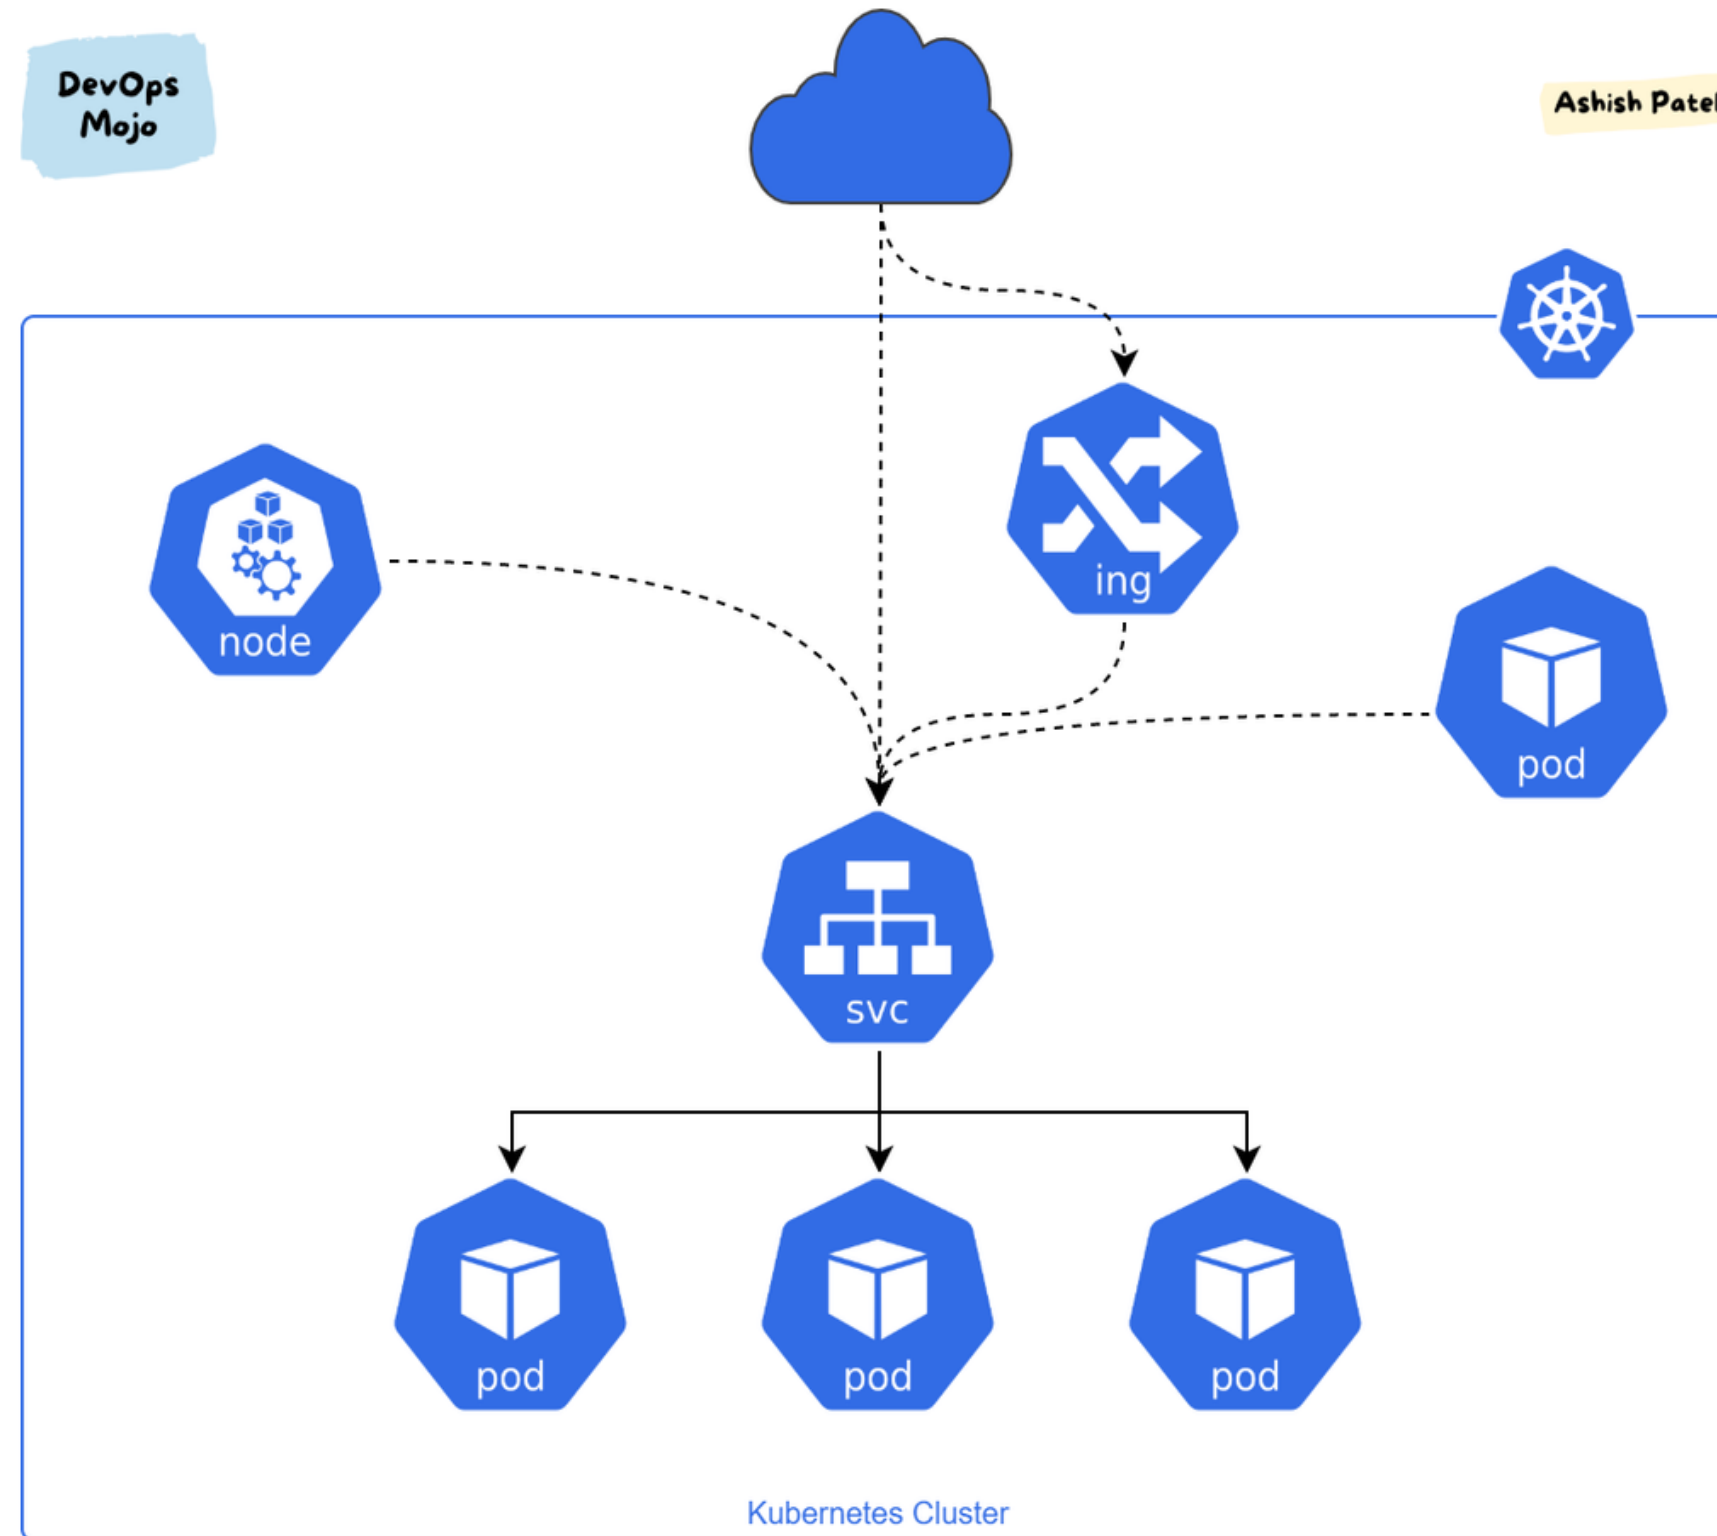

HOW TO IMPLEMENT:



feature

main/master

release

Feature: If developers want to update our application with new features, we have to create a new branch from main/master. They will write the code for new feature. Once if it is tested in Dev Env they will merge the code into main/master branch.

Note: In this Feature branch, they will check only the new feature of our application.

Main/Master: In this branch, we have to integrate our new code with old code by merging the feature branch with this branch and make sure that our entire application is running smoothly. Here we will deploy this branch on Staging/QA Env. so testers will perform multiple testings like Security, Pen testing, Performance etc..

Release: Once we got the approval from Testing Team, we have to create this release branch for every new release. Here we will deploy this application on Pre-Prod servers and perform UAT testing, if it looks ok then we will deploy this branch on Production.

HOW MANY PIPELINES WE HAVE MAINTAIN:

Both Dev and Stage Env contains same pipelines but its a best practice to maintain individual pipelines. But Production Env must contains separate pipelines because it contains some additions steps regarding testing like performance testing, automation testing etc..

HOW MANY CLUSTERS WE HAVE MAINTAIN:

Its ok to maintain multiple clusters for both Dev and Test with different Environments, But its mandatory to maintain individual clusters for Pre-Prod and Prod.

Because in real-time, if any error occurs in production environment, we don't trouble shoot directly because everyone don't have access for prod environments, So we always use Pre-Prod clusters for trouble shoot and fix that errors and later make same changes on prod clusters.