

QuestHR

CHANDRAMARI GROUP

Connection and troubleshooting manual

For every member, manager and administrator

Getting connected · desktop icon · daily use · scoring

escalation · conversations · troubleshooting · data safety

Version 5.0 · 20 October 2026 · UAE · KSA · Qatar · India


Contents

1. What QuestHR is
2. How it runs: Google Drive pilot, then your server
3. Installing the server and the desktop icon (administrator)
4. Getting connected (every member)
5. Daily use
6. Scoring and the escalation matrix
7. Team scorecard and supervisor reviews
8. Conversations, advice and escalation
9. Automatic troubleshooter
10. Troubleshooting guide
11. Data safety, backups and moving to the server
12. Official help pages

1. What QuestHR is

QuestHR is the Chandramari Group task and HR platform, built as a game. Each person has a character that looks like them, wears the dress code of their role and locality, and celebrates when a task is completed. Work moves up the hierarchy automatically: members to supervisors, supervisors to management, management to senior management.

- **100 points** for every task that is completed and signed off. Points are only given after completion and are recorded permanently.
- **Delay reasons:** an overdue task asks for a reason. The supervisor acknowledges it, management decides. A valid reason carries no negative marks.
- **Escalation matrix:** late steps move up a level automatically. Every step is time-stamped.
- **One-sheet scorecard** for every team member with supervisor reviews and escalation status, as PDF and Excel.
- **Conversations** for the whole group, each unit, direct messages, advice and level-by-level escalation.
- **Nothing can be erased.** Every change is kept as a new version in the audit trail.

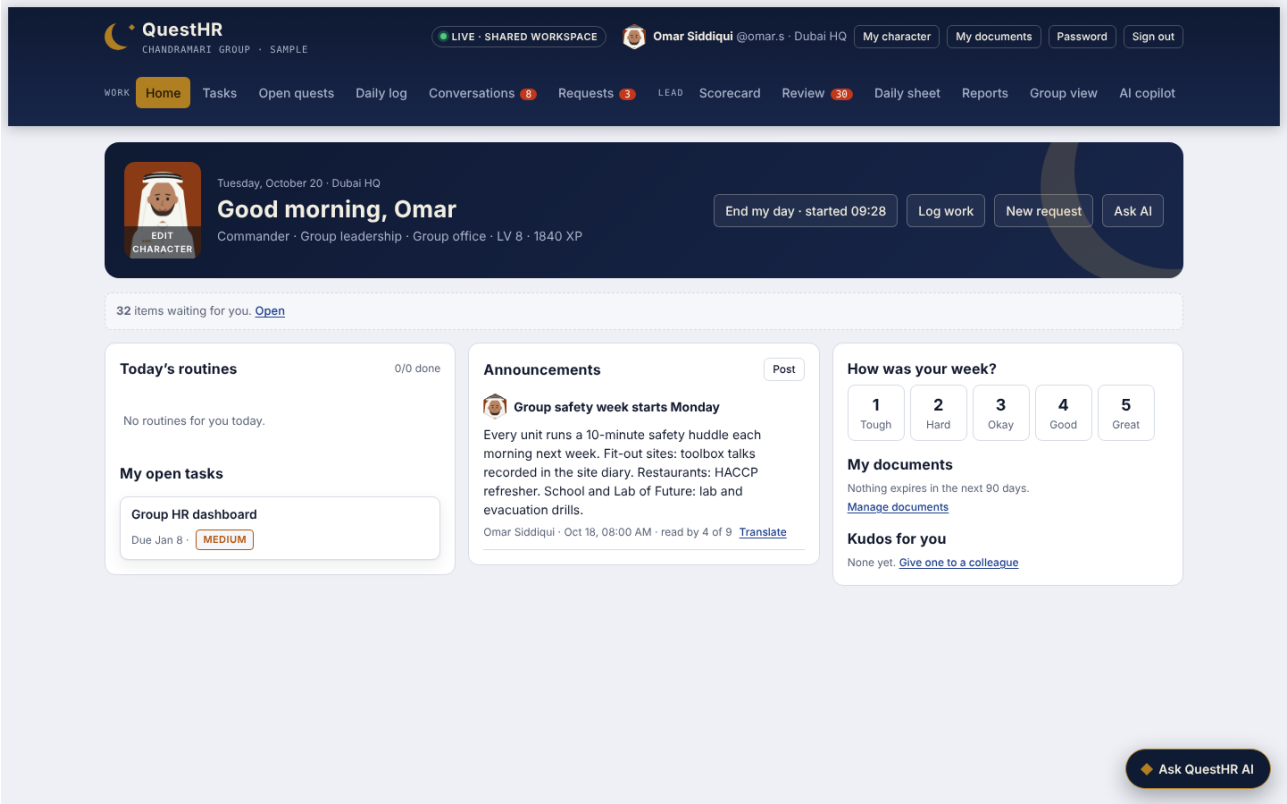

Home for senior management: today, the team, sign-offs and live status.

2. How it runs

QuestHR is the same app in two places. You can start with either and move later without losing anything.

	Connected pilot inside Claude	Your own QuestHR server
Start	Open the shared QuestHR link, share it with colleagues as Contributor	Run the installer on one computer or server; staff open its address
Who connects	Anyone you share the link with, from any country	Anyone who can reach the server address (office network, VPN or internet)
Database	Claude shared workspace (pilot capacity 25,000 records)	SQLite database on the server, with an automatic JSON fallback
Google Drive	Upload the package and manual to Drive for safe keeping	Hourly backups and the full audit journal written to Google Drive for desktop
AI	Built in	Add an Anthropic API key in config.json
Desktop icon	Browser menu: Install page as app / Create shortcut	Installers create the icon; members download theirs from Help
Sign-in	Username, password and locality Wi-Fi password	Same, checked by the server; sessions expire after 12 hours

Why the live database is not inside Google Drive: a database that is being written must not sit in a folder that another program is syncing, or the sync can damage it. The installers therefore keep the live database on the computer’s own disk and write a full copy plus every change (the audit journal) to Google Drive every hour. That gives you the Drive copy without the risk.

3. Installing the server and the desktop icon

Do this once, on the computer or server that will host QuestHR. It needs Node.js 22 or newer; the installers check and help you install it.

Windows 10 / 11

1. Unzip QuestHR-Package.zip to a permanent place, for example **C:\QuestHR**.
2. Double-click **Install-QuestHR-Windows.bat**. If Node.js is missing it installs it with winget, or opens the download page.
3. Answer **Y** when asked to keep backups in Google Drive for desktop (if installed).
4. The **QuestHR icon** is created on the Desktop and in the Start menu. Choose auto-start if this computer is the office server.
5. Run the installer as administrator once so it can open port 8080 in Windows Firewall for other computers.

macOS

1. Unzip the package to your Applications or Documents folder.
2. Right-click **install-mac.command** and choose Open (first time only).
3. **QuestHR.app** with the QuestHR icon appears on the Desktop and in Applications.

Linux

1. Unzip, then run **sh install-linux.sh**.
2. QuestHR appears in the applications menu and on the Desktop; optional auto-start uses a systemd user service.

Docker (company or cloud server)


```
docker compose up -d
```

First start

1. Open **http://localhost:8080** on the server. The server window also shows the network address, for example http://192.168.1.20:8080.
2. Choose **Set up your organisation**: name, vertical levels, business units, localities with their Wi-Fi passwords, and the admin account. Or load the sample to try it first.
3. Add members in Admin. Each gets a unique username and a temporary password to change at first sign-in.
4. Optional: add your Anthropic API key in **config.json** and restart for the AI features.
5. Share the network address with staff.

4. Getting connected (every member)


1. Open the link or server address your admin sent you in Chrome, Edge, Safari or Firefox, on a computer or phone.
2. Enter your **username**, **password** and the **Wi-Fi password of your locality**. The Wi-Fi password proves you belong to that office, even when you sign in from another country.
3. On first sign-in, set your own password (at least 8 characters with a letter and a number).
4. Add the desktop icon: **Help › Desktop icon**, pick Windows, macOS or Linux and double-click the downloaded file. In Chrome or Edge you can also choose **Install QuestHR** from the address bar.
5. Upload a passport-size photo in **My character** so your character looks like you.

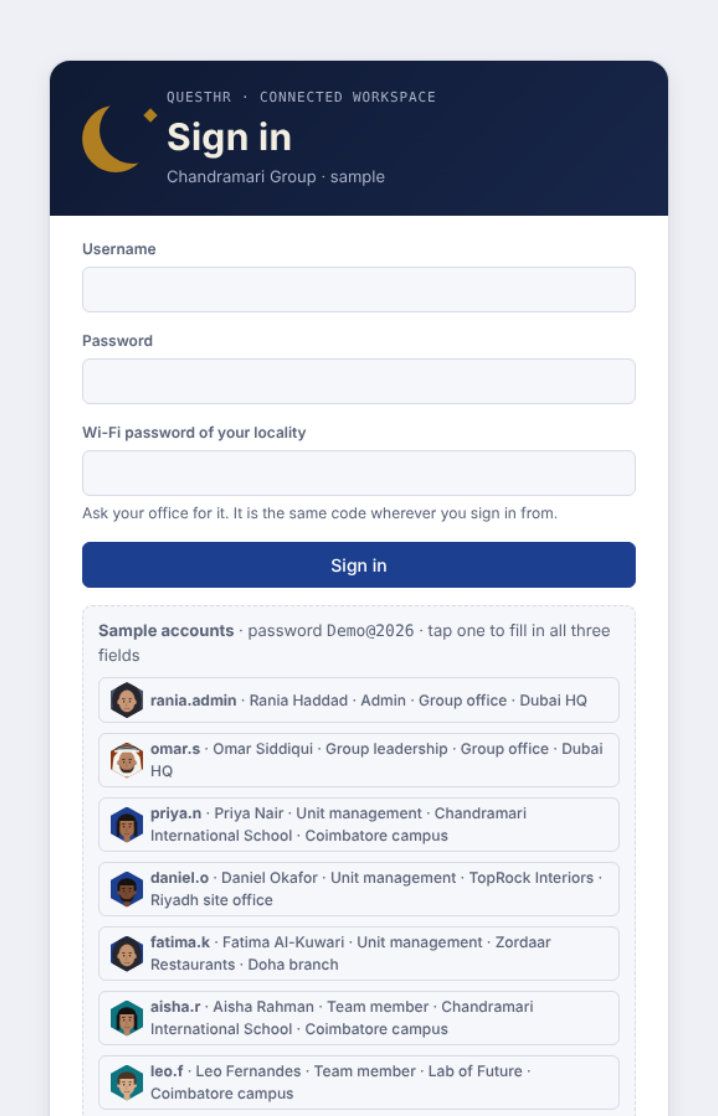

Sign-in: username, password and the locality Wi-Fi password.

5. Daily use

- **Start my day** on Home, then record your work in **Daily log** with supporting documents (PDF, Excel, Word, photos). “Achieved” needs a document.
- **Routines**: tick the opening and closing checklists, site diary or lab checks. Out-of-range readings create a corrective task automatically.
- **Complete a task**: your character dances and the task goes to your supervisor for sign-off. Points are recorded at sign-off.
- **Open quests**: offer to take over a colleague’s overdue task; the supervisor approves the handover.
- **Requests**: leave, salary letters, expenses and document updates go to the right approver.
- **Daily sheet** and **Reports**: any date range, person, week, month or year, as PDF.

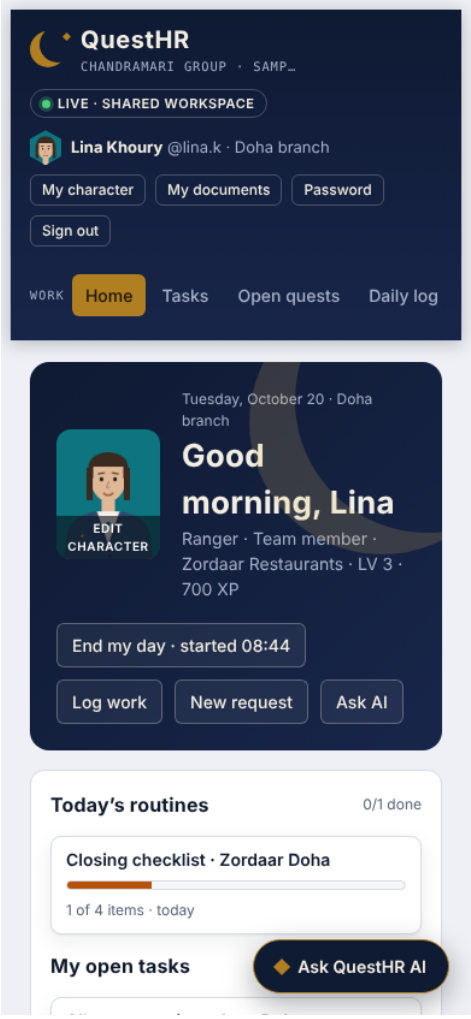


Home on a phone: routines, open tasks and the day timer.

6. Scoring and the escalation matrix

Every completed and signed-off task scores **100 points** for the person who completed it. Nothing is scored before completion. When a task passes its due date the system asks for a reason, and the reason moves up the matrix below.

Level	Who	What they do	Time limit	If late
Member	The person assigned	Gives the reason, remarks, evidence and a new completion date	As soon as the task is overdue	Shows as “Reason missing” on the scorecard
Level 1	Direct supervisor	Acknowledges the reason	24 hours (admin can change)	Moves to level 2
Level 2	Management (the supervisor’s manager)	Decides: valid, no negative marks and a new date; or not valid, minus 25 points	48 hours (admin can change)	Moves to level 3
Level 3	Senior management or the admin	Steps in and decides	Immediately	Highlighted to the admin

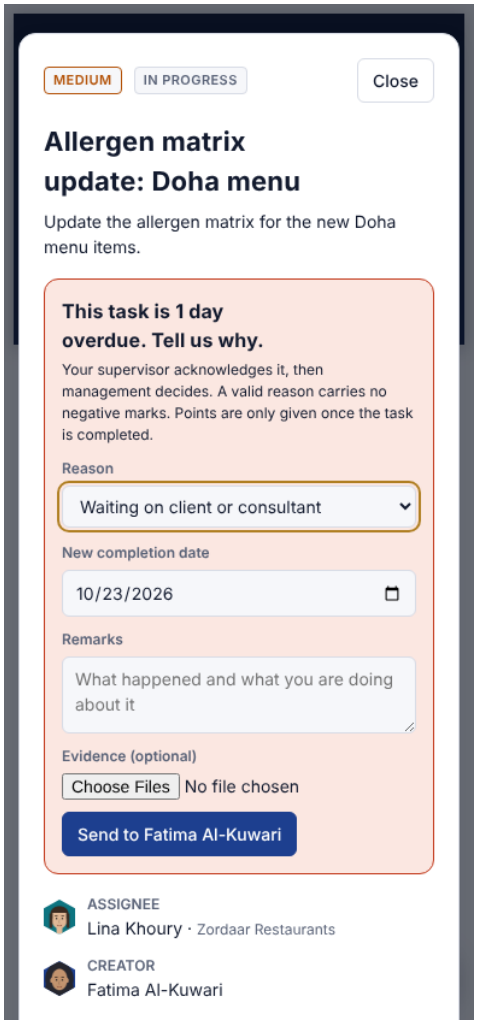


An overdue task asks for the reason and a new date.

7. Team scorecard and supervisor reviews

Lead › Scorecard shows every team member on one sheet: assigned, completed, score, open, overdue, delay reasons, routine compliance, targets met, the latest supervisor review and the escalation status. Choose this month, last month, quarter, year or all time, and download PDF or Excel (with the points ledger and the delays sheet).


Supervisors press **Review** on a row to rate the month from 1 to 5 with a comment. Reviews are permanent and appear on the sheet.

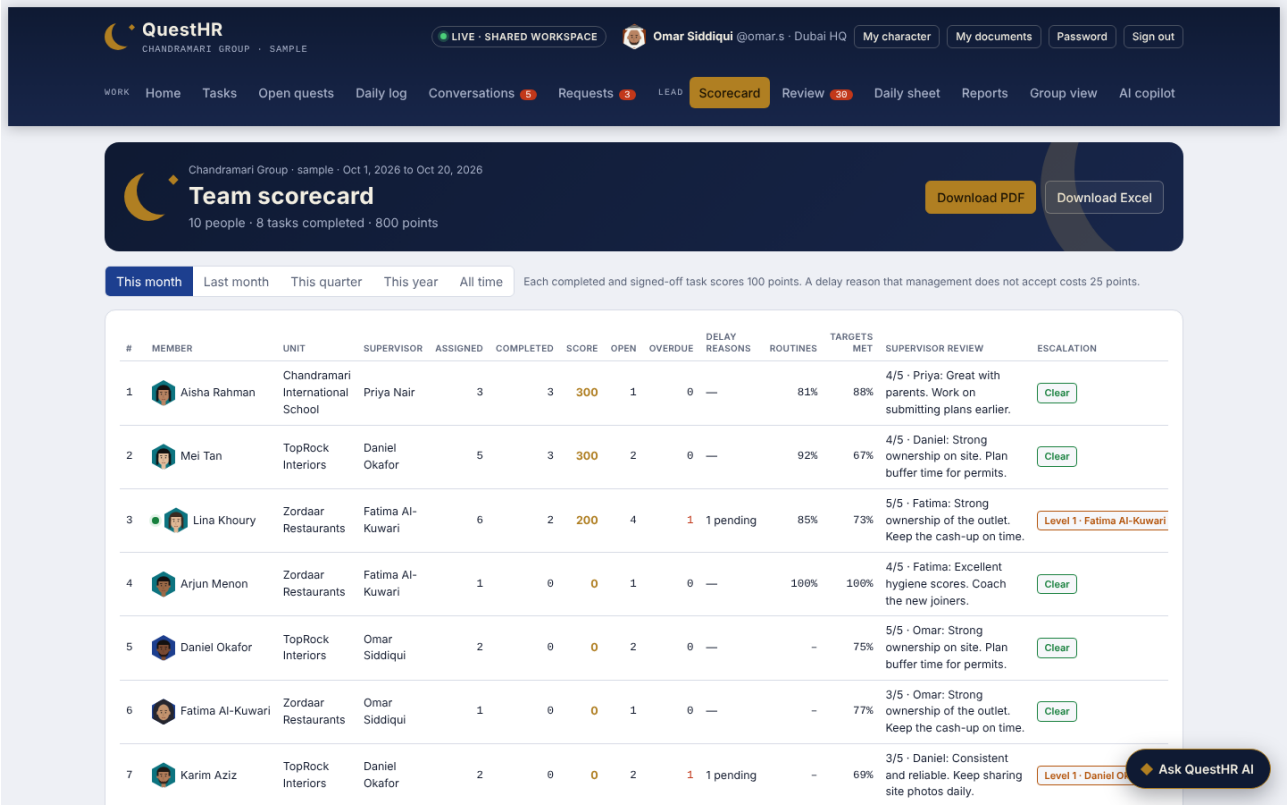

The team scorecard with reviews and escalation status.

8. Conversations, advice and escalation

- **Group lobby** for everyone, and a channel for each business unit.
- **Message a colleague** or **Ask for advice** from anyone in the group.
- **Escalate an issue**: it starts with your supervisor; anyone in the thread can press **Escalate to …** to bring in the next level, up to the admin. Mark it resolved when done.
- Attach documents, see who is online, and use **AI summary** to condense a long thread.

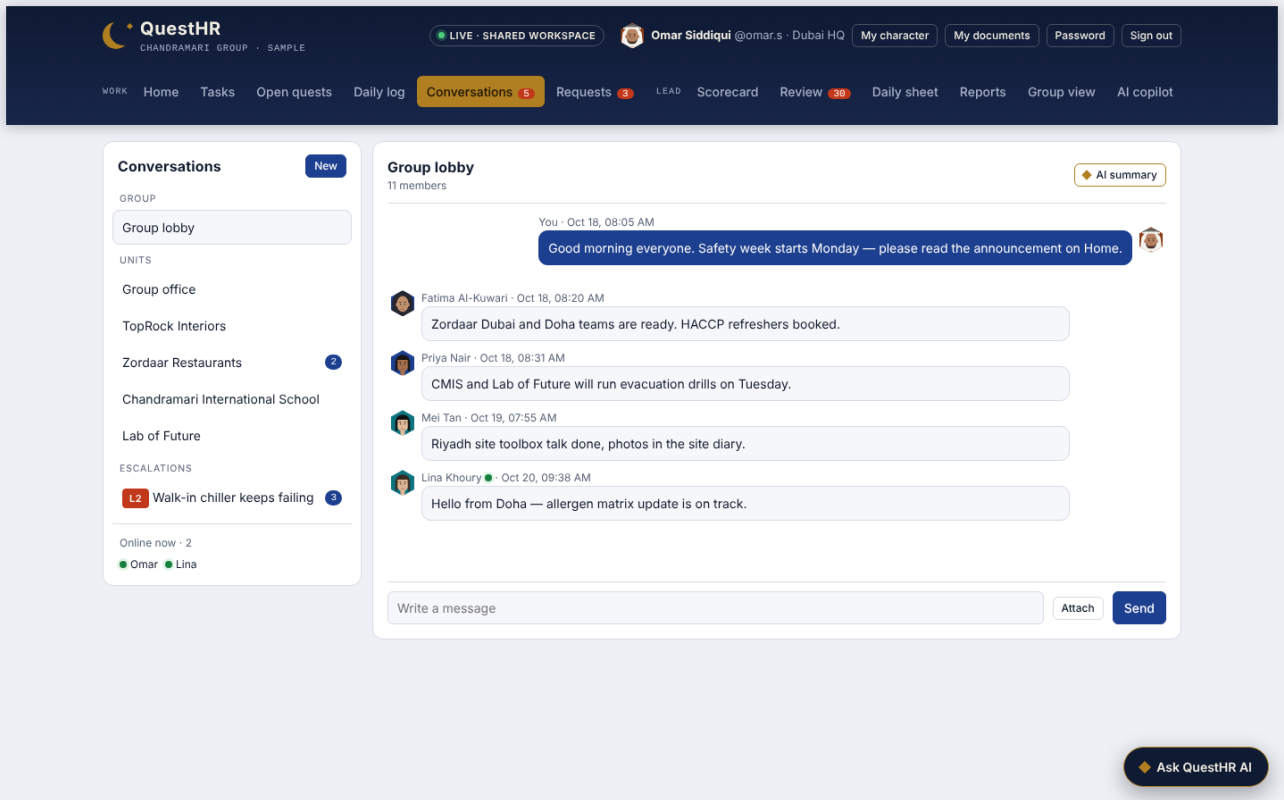


A message from Doha appears live in Dubai. Green dots show who is online.

9. Automatic troubleshooter

Help › **Run checks** tests this device and the workspace, explains each problem in plain words, offers safe one-click fixes, and links to the official help page for the problem. On a QuestHR server it also checks the server itself and looks up live details on the internet: the latest Node.js release from nodejs.org, the AI service status from status.anthropic.com, and the server clock against internet time.

The troubleshooter never changes or deletes stored records. Its fixes only reconnect and resend unsaved work, redraw characters, or clear view settings on your own device. **Explain with AI** turns the results into numbered steps.

Check	What it looks at
Connection	Live, connecting, view-only or offline; one-click reconnect and resend
Unsaved changes	Changes waiting to be saved
Browser storage and secure sign-in	Whether the browser allows what QuestHR needs
Time zone	Device time zone against your profile
AI and downloads	Whether they work in this view
Data health	Hierarchy loops, missing managers, duplicate usernames, orphaned records
Server: Node.js, database, disk, backups, Google Drive copy, AI key, people online	The health of the QuestHR server
Online: Node.js updates, AI service status, server clock, internet	Live details fetched from the official websites

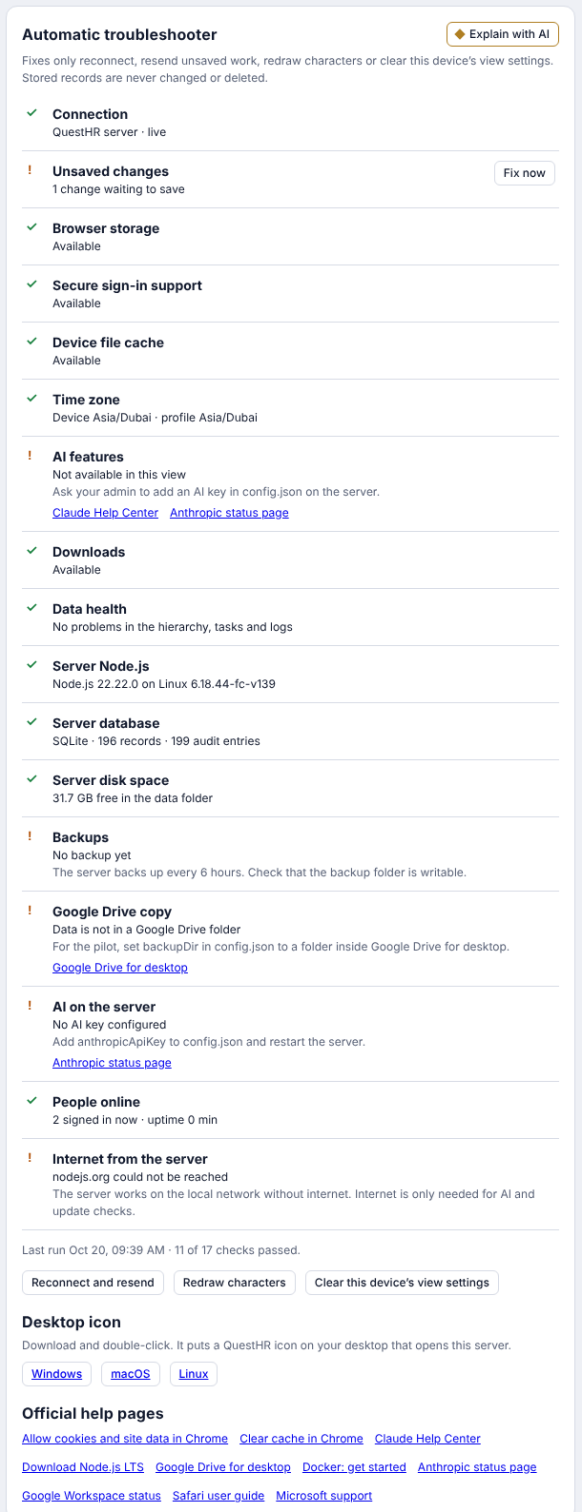

Troubleshooter results on a QuestHR server.

10. Troubleshooting guide

Symptom	Usual cause	What to do
Stuck on “Connecting”	No internet, or the server is off	Check the connection. Help › Reconnect and resend. On a server, check that the QuestHR window is open.
“View-only access”	Pilot link shared as viewer	The owner shares it with you as Contributor.
“Not the Wi-Fi password for …”	Locality code changed or mistyped	Ask your office for the current code.
“Too many attempts”	Five wrong passwords	Wait one minute. Ask the admin to reset your password if needed.
“Your session has ended”	Signed in for more than 12 hours	Sign in again; unsaved changes are sent after you sign in.
Other computers cannot reach the server	Firewall or wrong address	Use the network address shown in the server window, not localhost. Allow port 8080.
“Port 8080 is already in use”	QuestHR already running	Open http://localhost:8080, or change "port" in config.json.
Server will not start	Node.js missing or too old	Install Node.js 22 LTS from nodejs.org. Read server.log in the QuestHR folder.
AI not available	No AI key on the server, or opened outside Claude	Admin adds anthropicApiKey to config.json and restarts.
Files will not open	Very large file in the pilot	Open it on the device that uploaded it, or use the QuestHR server (60 MB per file).
Workspace full (pilot)	25,000 records reached	Move to the QuestHR server (section 11).
Database damaged (power cut, disk error)	—	Just restart. The server keeps the damaged copy, restores the latest backup and replays every later change from the audit journal.

For the administrator

```
node server/server.js --doctor
```

runs every check from the server console, performs the safe repairs and writes a fresh backup.

```
node tests/validate.js
```

runs the full validation suite on a temporary copy. It never touches your real data.

11. Data safety, backups and moving to the server

- No delete button anywhere, for any user or the admin. The server refuses delete requests.
- Every change is written to the database, the audit trail and a monthly audit journal.
- Backups every hour (configurable) to the backup folder; with Google Drive for desktop, to Drive. Older backups move to an archive folder rather than being deleted.
- Admin › Export gives a full JSON backup at any time.

Moving from the pilot to the final server

1. Install QuestHR on the final server (section 3) but do not set it up.
2. On the pilot computer, close QuestHR (close the server window).
3. Copy the pilot data folder (shown in the server window as “Data folder”) into the new server’s data folder.
4. Start QuestHR on the server. Help › Run checks should show all green for the database.
5. Share the new address; members re-run the desktop-icon download from Help.

12. Official help pages

Topic	Address
Claude Help Center	support.claude.com
Node.js download	nodejs.org/en/download
Google Drive for desktop	google.com/drive/download
Chrome: cookies and site data	support.google.com/chrome/answer/95647
Chrome: clear cache	support.google.com/accounts/answer/32050
Docker: get started	docs.docker.com/get-started
AI service status	status.anthropic.com
Google Workspace status	google.com/appsstatus/dashboard
Microsoft support	support.microsoft.com