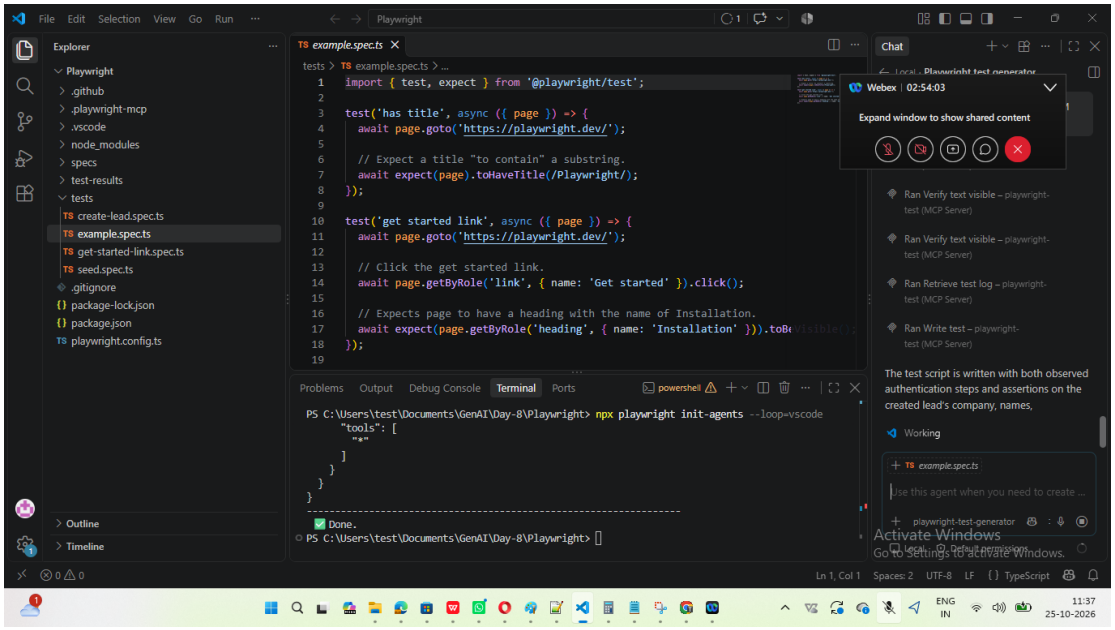
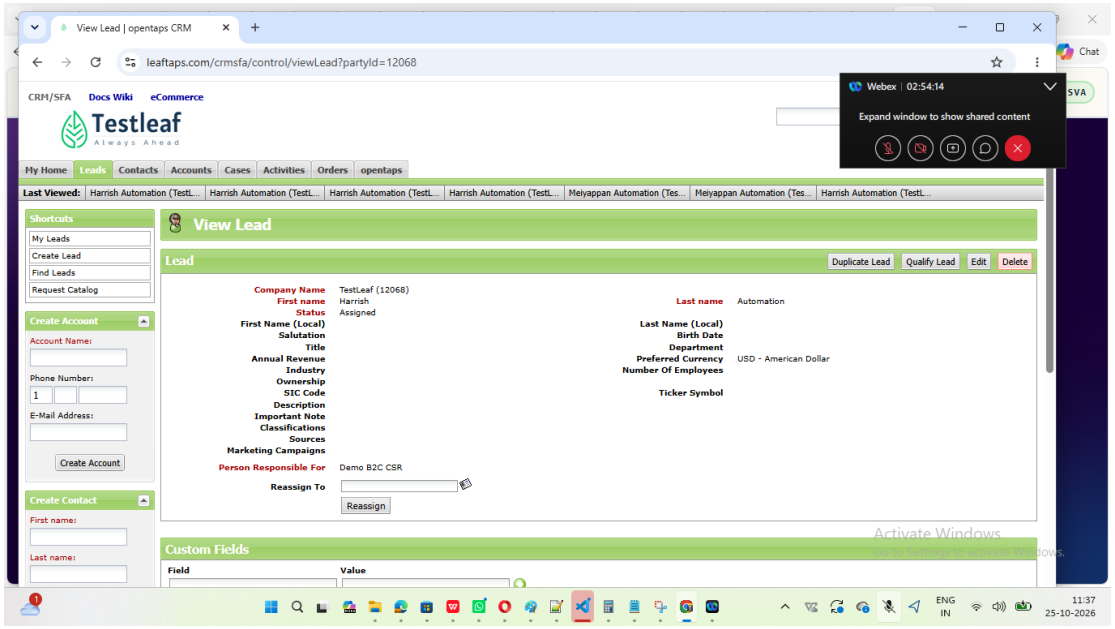
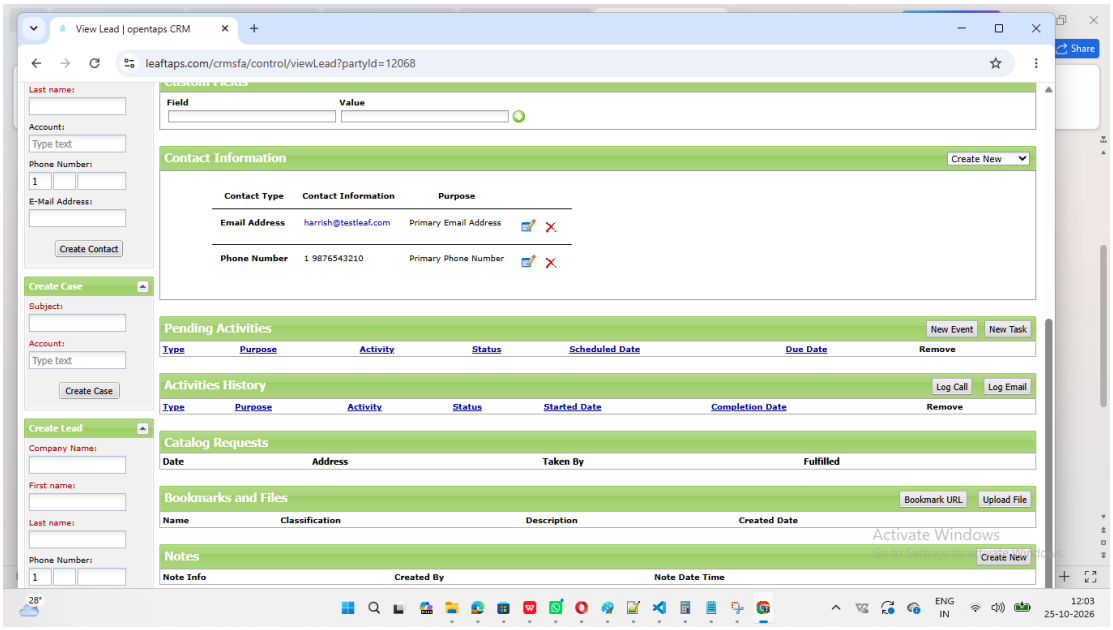
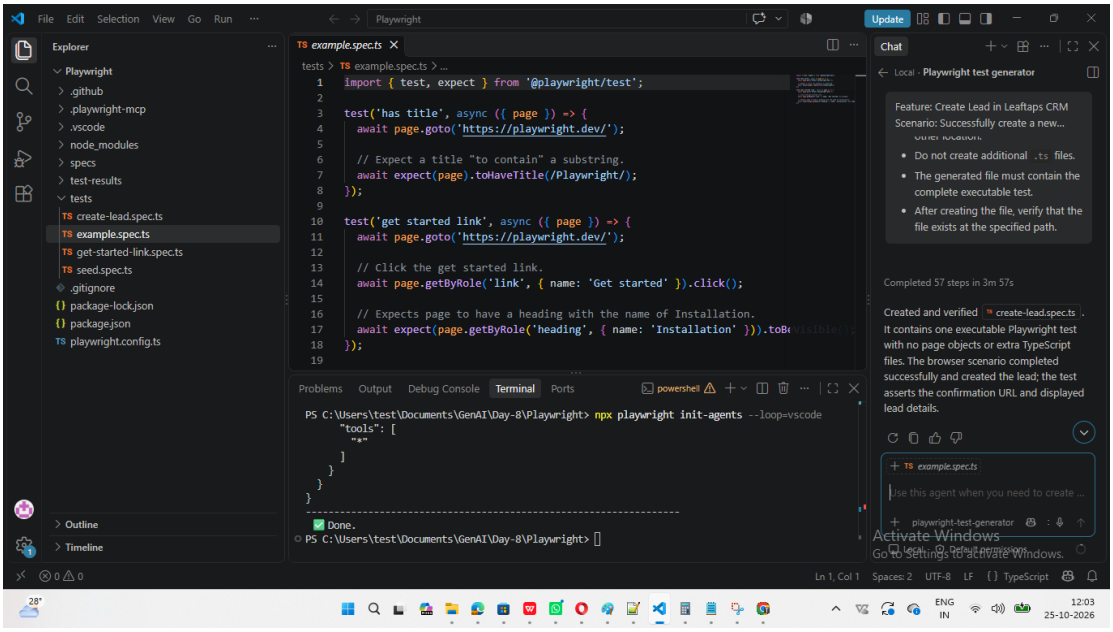
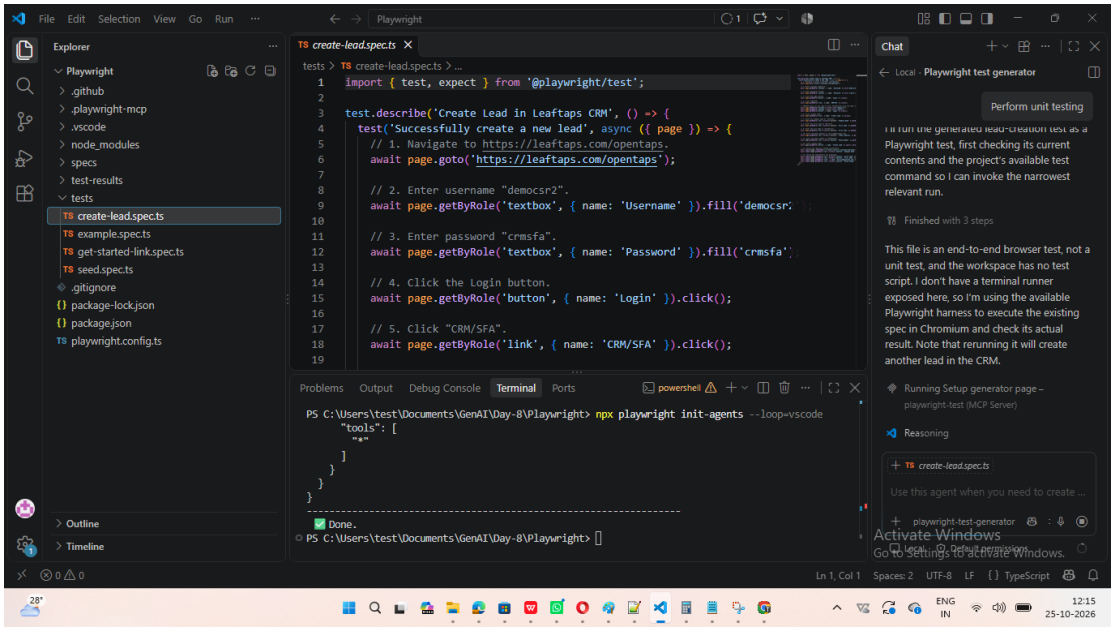

File Edit Selection View Go Run
Playwright
Explorer
Playwright
.github
.playwright-mcp
.vscode
node_modules
specs
test-results
tests
create-lead.spec.ts
example.spec.ts
get-started-link.spec.ts
seed.spec.ts
.gitignore
package-lock.json
package.json
playwright.config.ts
Outline
Timeline
example.spec.ts
import { test, expect } from '@playwright/test';
test('has title', async ({ page }) => {
await page.goto('https://playwright.dev/');
// Expect a title "to contain" a substring.
await expect(page).toHaveTitle(/Playwright/);
});
test('get started link', async ({ page }) => {
await page.goto('https://playwright.dev/');
// Click the get started link.
await page.getByRole('link', { name: 'Get started' }).click();
// Expects page to have a heading with the name of Installation.
await expect(page.getByRole('heading', { name: 'Installation' })).toB
});
Problems Output Debug Console Terminal Ports
powershell
PS C:\Users\test\Documents\GenAI\Day-8\Playwright> npx playwright init-agents --loop=vscode
"tools": [
"*"
]
}
}
}
Done.
PS C:\Users\test\Documents\GenAI\Day-8\Playwright>
Chat
Webex | 02:54:03
Expand window to show shared content
Ran Verify text visible – playwright-test (MCP Server)
Ran Verify text visible – playwright-test (MCP Server)
Ran Retrieve test log – playwright-test (MCP Server)
Ran Write test – playwright-test (MCP Server)
The test script is written with both observed authentication steps and assertions on the created lead's company, names,
Working
example.spec.ts
playwright-test-generator
Activate Windows
Go to Settings to activate Windows.
Ln 1, Col 1 Spaces: 2 UTF-8 LF TypeScript
ENG IN
11:37
25-10-2026


View Lead | opentaps CRM
leaftaps.com/crmsfa/control/viewLead?partyId=12068
CRM/SFA Docs Wiki eCommerce
Testleaf
Always Ahead
My Home Leads Contacts Accounts Cases Activities Orders opentaps
Last Viewed:
Shortcuts
My Leads
Create Lead
Find Leads
Request Catalog
Create Account
Account Name:
Phone Number:
E-Mail Address:
Create Account
Create Contact
First name:
Last name:
View Lead
Lead
Duplicate Lead Qualify Lead Edit Delete
Company Name TestLeaf (12068)
First name Harrish
Status Assigned
First Name (Local)
Salutation
Title
Annual Revenue
Industry
Ownership
SIC Code
Description
Important Note
Classifications
Sources
Marketing Campaigns
Person Responsible For Demo B2C CSR
Reassign To
Reassign
Last name Automation
Last Name (Local)
Birth Date
Department
Preferred Currency USD - American Dollar
Number Of Employees
Ticker Symbol
Custom Fields
Field
Value
Webex | 02:54:14
Expand window to show shared content
Chat
Activate Windows
ENG IN
11:37
25-10-2026


View Lead | opentaps CRM
leaftaps.com/crmsfa/control/viewLead?partyId=12068
Share
Last name:
Account:
Type text
Phone Number:
E-Mail Address:
Create Contact
Create Case
Subject:
Create Lead
Company Name:
First name:
Field
Value
Contact Information
Create New
Contact Type
Contact Information
Purpose
Email Address
harrish@testleaf.com
Primary Email Address
Phone Number
1 9876543210
Primary Phone Number
Pending Activities
New Event
New Task
Type
Purpose
Activity
Status
Scheduled Date
Due Date
Remove
Activities History
Log Call
Log Email
Started Date
Completion Date
Catalog Requests
Date
Address
Taken By
Fulfilled
Bookmarks and Files
Bookmark URL
Upload File
Name
Classification
Description
Created Date
Notes
Note Info
Created By
Note Date Time
Activate Windows
ENG
IN
12:03
25-10-2026


File Edit Selection View Go Run
Playwright
Update
Explorer
Playwright
.github
.playwright-mcp
.vscode
node_modules
specs
test-results
tests
create-lead.spec.ts
example.spec.ts
get-started-link.spec.ts
seed.spec.ts
.gitignore
package-lock.json
package.json
playwright.config.ts
Outline
Timeline
example.spec.ts
tests > example.spec.ts > ...
import { test, expect } from '@playwright/test';
test('has title', async ({ page }) => {
await page.goto('https://playwright.dev/');
// Expect a title "to contain" a substring.
await expect(page).toHaveTitle(/Playwright/);
});
test('get started link', async ({ page }) => {
await page.goto('https://playwright.dev/');
// Click the get started link.
await page.getByRole('link', { name: 'Get started' }).click();
// Expects page to have a heading with the name of Installation.
await expect(page.getByRole('heading', { name: 'Installation' })).toB
Problems
Output
Debug Console
Terminal
Ports
powershell
PS C:\Users\test\Documents\GenAI\Day-8\Playwright> npx playwright init-agents --loop=vscode
"tools": [
"*"
]
}
}
}
Done.
PS C:\Users\test\Documents\GenAI\Day-8\Playwright>
Chat
Local - Playwright test generator
Feature: Create Lead in Leaftaps CRM
Scenario: Successfully create a new...
Do not create additional .ts files.
The generated file must contain the complete executable test.
After creating the file, verify that the file exists at the specified path.
Completed 57 steps in 3m 57s
Created and verified create-lead.spec.ts. It contains one executable Playwright test with no page objects or extra TypeScript files. The browser scenario completed successfully and created the lead; the test asserts the confirmation URL and displayed lead details.
example.spec.ts
Use this agent when you need to create ...
playwright-test-generator
Activate Windows
Go to Settings to activate Windows.
Ln 1, Col 1
Spaces: 2
UTF-8
LF
TypeScript
ENG
IN
12:03
25-10-2026


File Edit Selection View Go Run
Playwright
Explorer
Playwright
.github
.playwright-mcp
.vscode
node_modules
specs
test-results
tests
create-lead.spec.ts
example.spec.ts
get-started-link.spec.ts
seed.spec.ts
.gitignore
package-lock.json
package.json
playwright.config.ts
Outline
Timeline
create-lead.spec.ts
tests > create-lead.spec.ts > ...
1 import { test, expect } from '@playwright/test';
2
3 test.describe('Create Lead in Leaftaps CRM', () => {
4 test('Successfully create a new lead', async ({ page }) => {
5 // 1. Navigate to https://leaftaps.com/opentaps.
6 await page.goto('https://leaftaps.com/opentaps');
7
8 // 2. Enter username "democsr2".
9 await page.getByRole('textbox', { name: 'Username' }).fill('democsr2');
10
11 // 3. Enter password "crmsfa".
12 await page.getByRole('textbox', { name: 'Password' }).fill('crmsfa');
13
14 // 4. Click the Login button.
15 await page.getByRole('button', { name: 'Login' }).click();
16
17 // 5. Click "CRM/SFA".
18 await page.getByRole('link', { name: 'CRM/SFA' }).click();
19
Problems Output Debug Console Terminal Ports
powershell
PS C:\Users\test\Documents\GenAI\Day-8\Playwright> npx playwright init-agents --loop=vscode
"tools": [
"*"
]
}
}
}
Done.
PS C:\Users\test\Documents\GenAI\Day-8\Playwright>
Chat
Local · Playwright test generator
Perform unit testing
Finished with 3 steps
This file is an end-to-end browser test, not a unit test, and the workspace has no test script. I don't have a terminal runner exposed here, so I'm using the available Playwright harness to execute the existing spec in Chromium and check its actual result. Note that rerunning it will create another lead in the CRM.
Running Setup generator page – playwright-test (MCP Server)
Reasoning
create-lead.spec.ts
Use this agent when you need to create ...
playwright-test-generator
Local · Default permissions
Activate Windows
Go to Settings to activate Windows.
Ln 1, Col 1 Spaces: 2 UTF-8 LF { } TypeScript
28°
ENG IN
12:15
25-10-2026