



Workpath SDK HPKTool User Guide

Product Group: HP Workpath SDK

Version: 1.6.3

Revised: November 11, 2025

HP Inc.
11311 Chinden Blvd.
Boise, ID 83714 USA

HP Confidential

Table of Contents

1	Introduction	3
1.1	Document conventions	3
2	HPK File	4
3	HPKTool layout	5
3.1	HPKTool File Content	5
3.2	HPKTool Menu	5
4	Running the HPKTool	6
5	Creating or Updating HPK file with application	7
5.1	Create HPK file in GUI mode	7
5.2	Retrieve Platform version using GUI	18
5.3	Update HPK file using GUI.....	19
6	Installing/Uninstalling HPK file using GUI.....	20
6.1	Install/Uninstall HPK file	20
7	Getting/Updating Application configuration using GUI.....	21
7.1	Getting/Updating Application configuration	22
8	Retrieving the list of buttons	23
9	Changing HPK file version.....	24
10	Updating Client Credentials for attestation test.....	25
11	Command line HPKTool.....	26
12	Trouble Shooting	30
12.1	SSL communication error.....	30
13	Legal notice	31
14	Support.....	32

1 Introduction

Any app intended for use on any HP device must be specially packaged as hpk file, submitted to HP for verification and validation (V&V), and finally signed by HP before it can be installed on a device. HPKTool is to make it easy to package a hpk file with your application.

1.1 Document conventions

The following conventions are used throughout this document to define, describe, and discuss the API: function prototypes, data structure definitions, enumerated constants.

- **Name** – Bold signifies item names such as button names and menu items.
- <name> – Angle brackets mark URLs.
- {value} – Curly braces represent values to be replaced.
- Identifiers for defined constants use all UPPERCASE letters.
- *Name* – Italicized type refers to formal function parameters, data structure types and fields, and other defined or enumerated types in the text body (for example, *streamtype*).
- Numbers are in decimal format unless otherwise noted.
- Name - Monospaced type is used for code fragments, function prototypes, and data type definitions.
- Function names are usually accompanied by parentheses (for example, `function()`).

2 HPK File

“HPK” file is a compressed archive (using .ZIP file format) where the files in the archive follow specific conventions and has an extension as “.hpk”.

The primary purpose of a HPK package is to encapsulate a single application and meta-data associated with the application in `hpk.xml`. The application defines workpath button information specified by app for running on the Workpath Platform. Here’re the examples of the hpk files:

- HPK
 - `hpk.xml`
 - *`application.apk`*

In particular, the HPK package supports the presence of the META-INF which contains signing information.

- Signed HPK
 - `hpk.xml`
 - *`application.apk`*
 - META-INF

All information specified within the HPK package is immutable and any changes to this information require a new HPK package.

3 HPKTool layout

3.1 HPKTool File Content

The HPKTool folder contains executables and shell files that are launched to run on a PC.

File Location	File Description
{WorkpathSDKDir}	
\Tools	
\{HPKToolDir}	
\ HPKTool.exe	This executable will work on windows.
\ HPKTool-cli.exe	This executable will work with command line keywords on windows.
\ hpktool	This batch file will work on Linux.

3.2 HPKTool Menu

The HPKTool provides sub-menus:

Menu	Description
File	
New	Create hpk file with apk.
Open .hpk	Open hpk file for updating contents.
Exit	Exit HPKTool
Actions	
Install/Uninstall .hpk	Install or Uninstall .hpk on a device.
Application Configuration	Retrieve or Update the application's configuration
Application Management	Retrieve a list of applications from the device
Application Attestation	Update Client Credentials of application for testing attestation feature
Help	
About	HPKTool version, Copyright
Settings	HPK Version for supporting various versions of HPK spec. The supported spec of hpk is 1.5.0 and the tool version is 1.6.3.

4 Running the HPKTool

1. Copy the contents of the HPKTool onto the hard drive, preferably to a root directory.
2. Disable any firewalls/settings that might prevent connection from PC to device.
3. The PC environment for the HPKTool is one of the following.
 - 1) GUI: Oracle JDK 8 (or later)
 - 2) GUI: OpenJDK 11 (or later) and OpenJFX
 - 3) CLI: Oracle JDK 8 (or later) or OpenJDK 8 (or later)
4. If it's launched successfully, the main dialog will show.

A main dialog of the HPKTool in GUI mode

NOTE: When running HPKTool in Linux, an environment variable file(hpkttool.conf) is automatically created. If there is a problem executing the program, please check the contents of the file.

5 Creating or Updating HPK file with application

5.1 Create HPK file in GUI mode

1. Double click on **HPKTool.exe** to open the HPKTool in Windows or run **./hpktool** in Linux, then navigate to: File > New.

HPK Tool (Version 1.6.3) - HPK spec 1.5.0 (Schema v2.6)

File Actions Help

This page is for creating HPK

Install File: Please select application (ex. workpath.apk) [Select File]

UUID: App UUID [Generate]

Name: App Name

Vendor Name: Vendor Name

Platform version: 31.9 [Refresh]

Date: 20251111

Default Config: Default Configuration (Optional) [Select File] [Clear]

AuthAgent: AuthAgent Name [Add] [Delete]

Authorization: Authorization Name [Add] [Delete]

Home Screen App: ☐ Use Home Screen mode ☐ Set as default

Accessory: [Add Table]

Type	Vendor ID (Decimal)	Product ID (Decimal)		
No Accessory				

WebService: WebService Name [Add] [Delete] [Add Table]

Met	Category	Absolute Path	Auth		
-----	----------	---------------	------	--	--

The main dialog in GUI HPKTool for creating hpk with application file (.apk)

NOTE: In Linux, change the file permission before running hpktool.

2. Click **Select file** to load application file, then complete the creation information:

Fields	Options	Since	Description
UUID	Mandatory	V1.0.0	Universal unique identifier as defined in https://tools.ietf.org/html/rfc4122 . UUID is associated with an App. New versions of the same App MUST have the same UUID if not they will be considered a new App.
Name	Mandatory		Name of App that will be shown on App Galleries. Only the English Language shall be supported.
Vendor Name	Mandatory		Name of Vendor that developed App. Only the English Language shall be supported.
Platform version	Mandatory	V1.3.0	The target of Workpath Platform Version
Date	Mandatory	V1.0.0	Date developer created package in YYYYMMDD format.
Default config	Optional		The file path including JSON data for setting application's default configuration.
Sub Apps	Optional		The list of application links that support multiple access points to display in the HP launcher. Sub applications own different UUID with HPK UUID.
AuthAgent	Optional	V1.1.0	AuthAgent details that include name, description, prompt path to be launched by sign-in process for showing login activity, and flag of pre-prompt.
Authorization	Optional	V1.6.3	Authorization details that include name and description.
Home Screen App	Optional	V1.1.0	Flags that make the application into Home Screen Mode and automatically set it to the default Home Screen.
Accessory	Optional	V1.2.0	Accessory details that include type, vendor id, product id and serial number to be registered during installation process for using accessory.
StatisticsAgent	Optional	V1.4.0	StatisticsAgent details that include name, description, and critical solution to be registered as an agent to get statistics information.
WebService	Optional	V1.4.0	WebService details that include name, description, method, category, and absolute path for receiving a request.

3. (Optional) "Default Config"

"Default Config" is defined by Workpath application for the support of custom configuration.

How to create default configuration

There are 2 ways to create "Default Config" in Workpath:

- 1) Define "Default Config" and package it. Then, install hpk file.
- 2) Create HPK without default configuration, then deploy "Default Config" by package manager supported by Workpath Platform.

HPKTool supports 1) way. Click **Select file** button to choose the configuration file which includes any data of JSON type. HPK file will be:

- HPK
 - hpk.xml
 - *application.apk*
 - *config.json*

```
{
  "loginTimeout" : "120",
  "smtpServer" : "smtp.gmail.com",
  "smtpPort" : "587",
  "smtpSecureMode" : "2",
  "smtpServerAuthOn" : "true",
  "httpProxyHost" : "www.hp.com",
  "httpProxyPort" : "8080",
}
```

An example of default config file: config.json

How to read default configuration

After finishing the installation, an application can read these data through ConfigService of Workpath SDK API.

HPKTool also provides the feature as the menu to retrieve/update the config. Please find the usage in section: [7.Getting/Updating Application configuration using GUI](#)

4. (Optional) "Sub Apps"

"Sub Apps" is for creating the links of the access to Workpath application. If HPK has "Sub Apps", additional button will show on HP launcher.

How to create sub apps

Click **Add Table**, then update subactivity for creating an additional button to provide different end-point of an application to the user on omni with information :

Fields		Options	Description
SubApp	uuid	Required	UUID associated with SubApp
	platformId	Required	Platform Id associated with SubApp. Value is defined by Workpath application. Expected value is package name.

The screenshot shows a dialog box titled "Add activity for button". It contains two input fields: "UUID" with the value "cd7bc460-b79d-4860-a593-d1fe17d2ac70" and a "Generate" button next to it. Below the UUID field is the "Platform Path" field with the value "com.hp.app/com.hp.app.SubActivity". At the bottom of the dialog are three buttons: "Add" (blue), "Delete" (red), and "Cancel" (grey).

An example for creating an additional button on HP launcher

NOTE: As the name suggests, a sub app is a part and parcel of a parent app; they get installed and uninstalled as part of the parent app's installation/uninstallation process. When installed, they appear as an independent app and provide an additional entry point to the app's functionality. They are often used, to increase the ease of use.

5. (Optional) "AuthAgent"

"AuthAgent" is for creating the Authentication Agent to support device authentication.

How to create AuthAgent

Click **Add**, then update the information to create AuthAgent. If HPK is created with this option, application will show in sign-in method lists.

Fields		Options	Description
AuthAgent	Name	Required	Name of AuthAgent that will be shown on sign-in method lists. Default is English and multi-language is supported.
	Description	Required	Description of AuthAgent. Default is English and multi-language is supported.
	Prompt Path	Required	Prompt Path associated with AuthAgent. Value is defined by application. Expected value is activity path.
	Pre-prompt	Optional	Flag to invoke pre-prompt service before launching Prompt.

An example for creating AuthAgent


6. (Optional) "Authorization"

"Authorization" is for creating the Authorization Agent to support device authorization access.

How to create Authorization

Click **Add**, then fill Name and Description:

Authorization	Name	Required	Name of Authorization that will be shown on sign-in method lists. Default is English and multi-language is supported.
	Description	Required	Description of Authorization. Default is English and multi-language is supported.

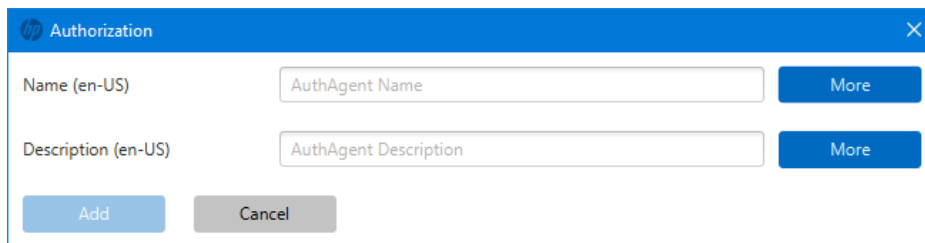

HPK Authorization

Name (en-US) AuthAgent Name More

Description (en-US) AuthAgent Description More

Add Cancel

An example for creating Authorization

7. (Optional) "Home Screen App"

"Home Screen App" is for enabling a Workpath application onto Home Screen Mode. If it's enabled, a Workpath application comes on the first page instead of HP launcher.

"Set as default" is for setting a Workpath application to default Home Screen while installation.

8. (Optional) "Accessory"

"Accessory" is for adding accessory information to be registered by Workpath platform. If HPK has "Accessory", message dialog such as unregistered accessory information will be removed on omni.

How to add accessory

Click **Add Table**, then select type of accessory and fill vendor id and product id as decimal type:

Fields		Options	Description
Accessory	Type	Required	Accessory type. "Owned" or "Shared".
	Vendor ID (Decimal)	Required	Accessory vendor ID
	Product ID (Decimal)	Required	Accessory product ID
	Serial Number	Optional	Accessory serial number, NULL means to register application for all accessories which have the same vendor id and the same product id.

The screenshot shows a dialog box titled "Accessory" with a blue header bar. Inside, there are four input fields: "Type" with radio buttons for "Owned" (checked) and "Shared"; "Vendor ID (Decimal)" with a text box containing "Vendor ID (Decimal)"; "Product ID (Decimal)" with a text box containing "Product ID (Decimal)"; and "Serial Number" with a text box containing "Serial Number" and a "Null" checkbox. At the bottom are "Add" and "Cancel" buttons.

An example for registering accessory

9. (Optional) "StatisticsAgent"

"StatisticsAgent" is for being registered as an agent to get statistics information by Workpath platform.

How to create StatisticsAgent

Click **Add**, then fill Name and Description:

Fields		Options	Description
Statistics Agent	Name	Required	Name of StatisticsAgent that will be shown on sign-in method lists. Default is English and multi-language is supported.
	Description	Required	Description of StatisticsAgent. Default is English and multi-language is supported.
	Critical solution	Optional	This prevents the device from overwriting old entries in the job buffer(default 256 jobs) of an agent until the solution has acknowledged processing that entry.

The screenshot shows a dialog box titled "StatisticsAgent" with a blue header. Inside, there are three input fields: "Name (en-US)" with the placeholder text "Statistics Agent Name", "Description (en-US)" with the placeholder text "Statistics Agent Description", and "Critical solution" with an "Enable" checkbox. Each input field has a "More" button to its right. At the bottom of the dialog are "Add" and "Cancel" buttons.

An example for registering accessory

10. (Optional) "WebService"

"WebService" is for being registered as an agent for receiving a request from outside - operating like an endpoint- by Workpath platform.

How to add WebService

Click **Add**, then fill Name and Description:

Fields		Options	Description
WebService	Name	Required	Name of WebService. Default is English and multi-language is supported.
	Description	Required	Description of WebService. Default is English and multi-language is supported.

An example for registering WebService

Click **Add Table**, then select Method of EndPoint and fill category and absolute path:

Fields		Options	Description
EndPoint	Method	Required	WebService Endpoint method. "Get", "Put", "Post", and "Delete".
	Category	Required	WebService Endpoint category. Package name.
	Absolute Path	Required	WebService Endpoint absolute path. Service class path to process the request.
	Auth Type	Required	WebService Endpoint auth type. Defines how calls are authenticated.

An example for registering WebService Endpoint

NOTE: At least one endpoint is required to create hpk file with webservice option.

11. Click **Create HPK**, and select the location of file save to complete to make hpk file.

HPK Tool (Version 1.6.3) - HPK spec 1.5.0 (Schema v2.6)

File Actions Help

Default Config: Default Configuration (Optional) [Select File] [Clear]

AuthAgent: AuthAgent Name [Add] [Delete]

Authorization: Authorization Name [Add] [Delete]

Home Screen App: ☐ Use Home Screen mode ☐ Set as default

Accessory: [Add Table]

Type	Vendor ID (Decimal)	Product ID (Decimal)			
No Accessory					

Webservice: Webservice Name [Add] [Delete] [Add Table]

Met...	Category	Absolute Path	Auth		
No Webservice EndPoint					

StatisticsAgent: Statistics Agent Name [Add] [Delete]

Sub Apps: [Add Table]

UUID	Platform Path			
No Apps				

[Create HPK]

5.2 Retrieve Platform version using GUI

1. Double click on **HPKTool.exe** to open the HPKTool in Windows or run **./hpktool** in Linux, then navigate to: File > Open (.hpk).
2. Click button, then fill device info for retrieving supported platform version. (EWS:Platform version)

The image shows two screenshots of the HPK Tool application. The top screenshot is the main 'This page is for updating HPK' window, and the bottom screenshot is a 'Get Device Version' dialog box.

HPK Tool (Version 1.6.3) - HPK spec 1.5.0 (Schema v2.6)

File Actions Help

This page is for updating HPK

Install File: DeviceInfoSample.apk [Select File]

UUID: 11111111-1111-1111-9997-111111111111 [Generate]

Name: DeviceInfo Sample

Vendor Name: HP

Platform version: 31.9 [Refresh]

Date: 20251111

Default Config: Default Configuration (Optional) [Select File] [Clear]

AuthAgent: AuthAgent Name [Add] [Delete]

Authorization: Authorization Name [Add] [Delete]

Home Screen App: ☐ Use Home Screen mode ☐ Set as default

Accessory: [Add Table]

Type	Vendor ID (Decimal)	Product ID (Decimal)
No Accessory		

WebService: Webservice Name [Add] [Delete] [Add Table]

Met Category Absolute Path Auth

Get Device Version

Host: Host

Admin Password: Admin Password

[OK] [Cancel]

An example for retrieving platform version with workpath application

5.3 Update HPK file using GUI

1. Double click on **HPKTool.exe** to open the HPKTool in Windows or run **./hpktool** in Linux, then navigate to: File > Open (.hpk).
2. Complete the update information, then click **Save as**.

HPK Tool (Version 1.6.3) - HPK spec 1.5.0 (Schema v2.6)

File Actions Help

Default Config: Default Configuration (Optional) [Select File] [Clear]

AuthAgent: AuthAgent Name [Add] [Delete]

Authorization: Authorization Name [Add] [Delete]

Home Screen App: ☐ Use Home Screen mode ☐ Set as default

Accessory: [Add Table]

Type	Vendor ID (Decimal)	Product ID (Decimal)			
No Accessory					

WebService: WebService Name [Add] [Delete] [Add Table]

Met...	Category	Absolute Path	Auth		
No WebService EndPoint					

StatisticsAgent: Statistics Agent Name [Add] [Delete]

Sub Apps: [Add Table]

UUID	Platform Path			
No Apps				


[Save as]

An example for updating hpk file with workpath application

6 Installing/Uninstalling HPK file using GUI


6.1 Install/Uninstall HPK file

1. Double click on **HPKTool.exe** to open the HPKTool in Windows or run **./hpktool** in Linux, then navigate to: Actions > Install/Uninstall (.hpk).
2. Click **Select file** to install hpk.
3. Type a host and admin password information.
4. (Optional) Check Option field.
 - 1) Overwrite configuration: Overwrite previous configuration data when checked.
5. Click **Install**.

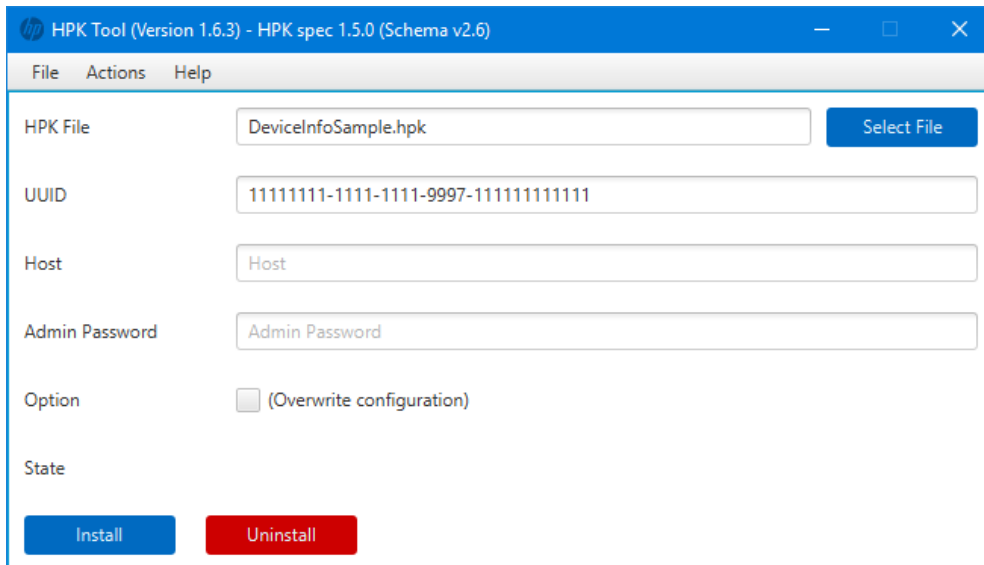

An example for installing hpk file

6. If installed, find "Install completed" dialog and icon on device.

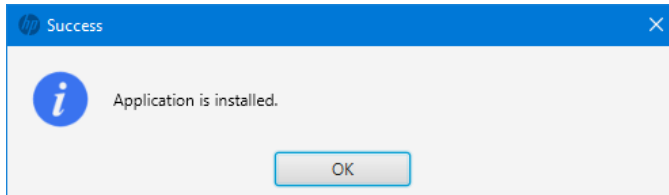

7. For Uninstallation, type UUID and click **Uninstall**.

7 Getting/Updating Application configuration using GUI

The configuration data is associated with a package and is defined as JSON type.


OXPD application has the data of url, userid, and password to launch the application from OMNI.

```
{  
  \"password\": \"ServicePass\",  
  \"url\": \"https://my-cloud-print.com\",  
  \"userid\": \"ServiceUser\"  
}
```


For workpath application, there's no restriction to use the configuration data under 64KB. Application can read the configuration using "ConfigService" in HP Workpath API.

7.1 Getting/Updating Application configuration

1. Double click on **HPKTool.exe** to open the HPKTool in Windows or run **./hpktool** in Linux, then navigate to: Actions > Application configuration.
2. Click **Select file** to load .hpk or type UUID.
3. Type Host, then click **Get**.
4. If app doesn't have configuration, warning dialog will show.

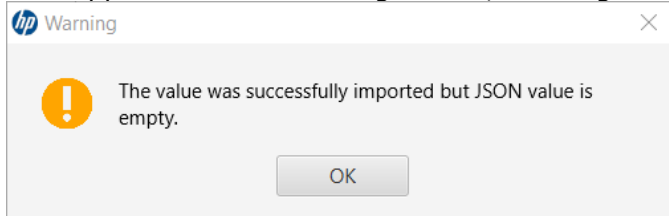


5. Update Configuration as JSON type, then click **Update**.

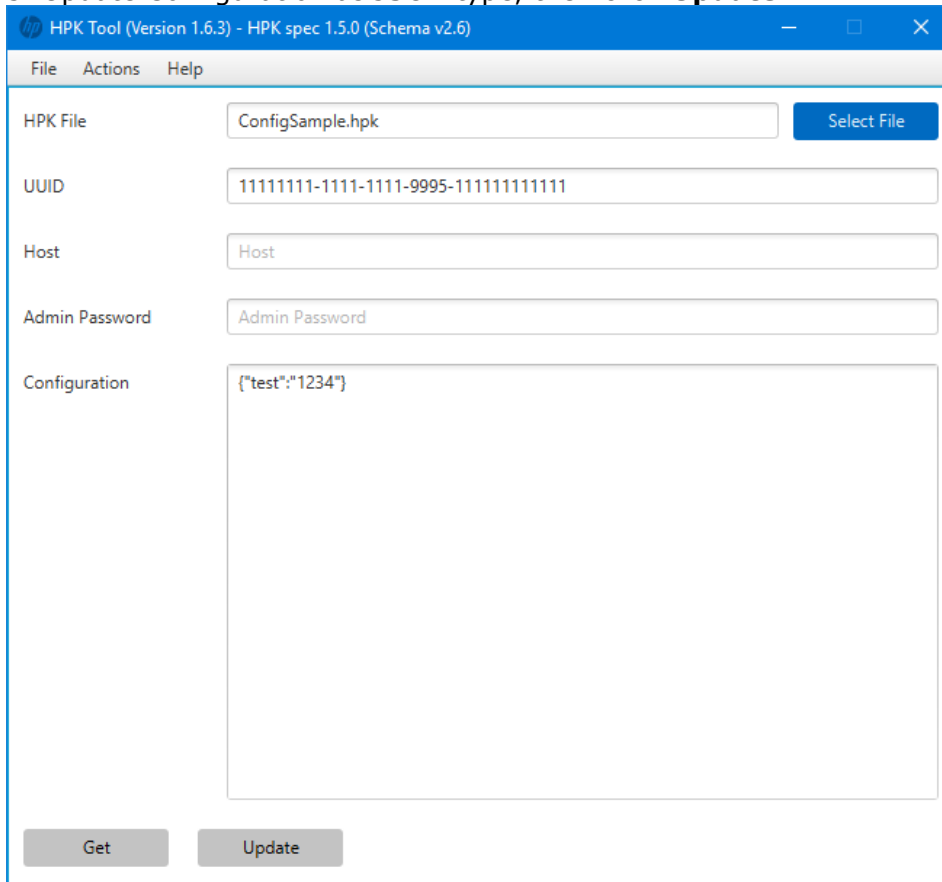


An example for updating application configuration data

8 Retrieving the list of buttons

HPKTool supports retrieving the list of applications from a device.

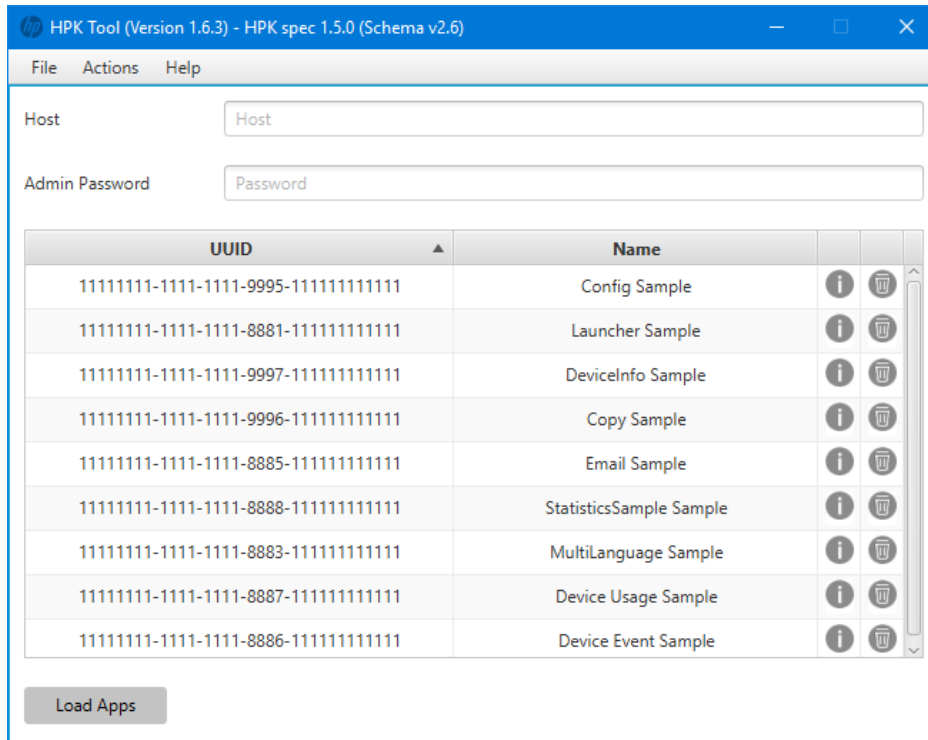

An example for retrieving the list of applications

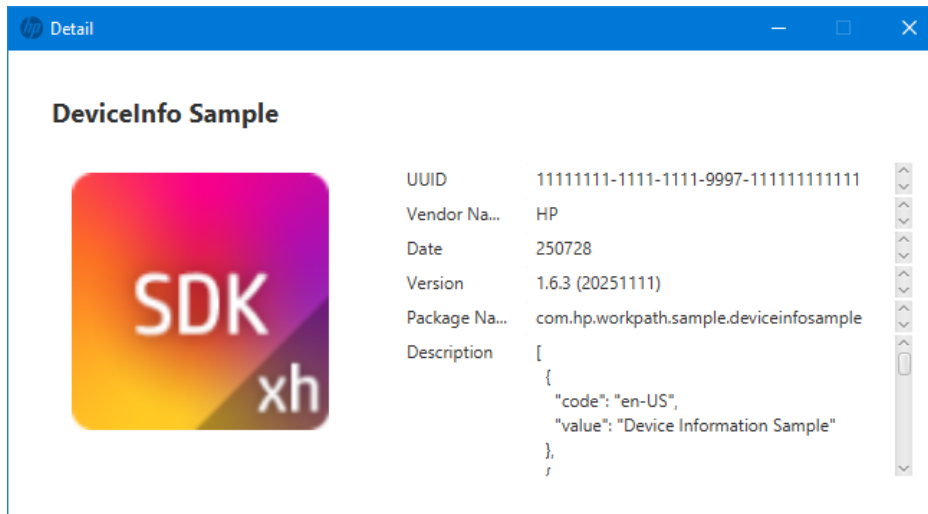


An example for retrieving the details of application

9 Changing HPK file version


HPKTool provides the menu to change hpk file version for creating or updating hpk files. If device doesn't support the latest hpk file version, developer can change the target version before creating hpk file as below.

1. Select Help > Settings.
2. Select the hpk file version.

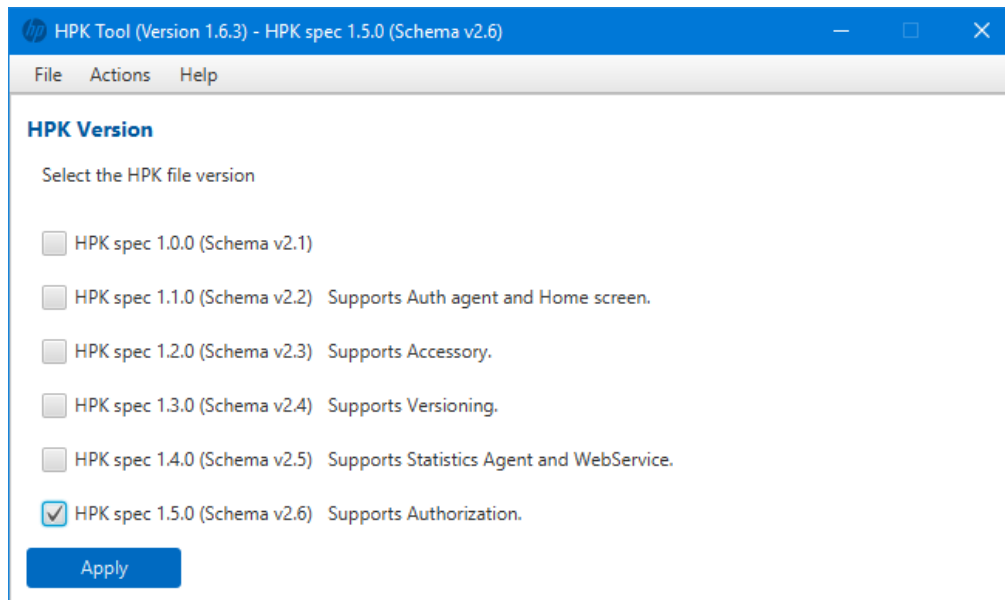

An example for configuring the hpk file version

From HPK Tool 1.3.1, HPKTool shows the HPK Build information and selected spec on title.

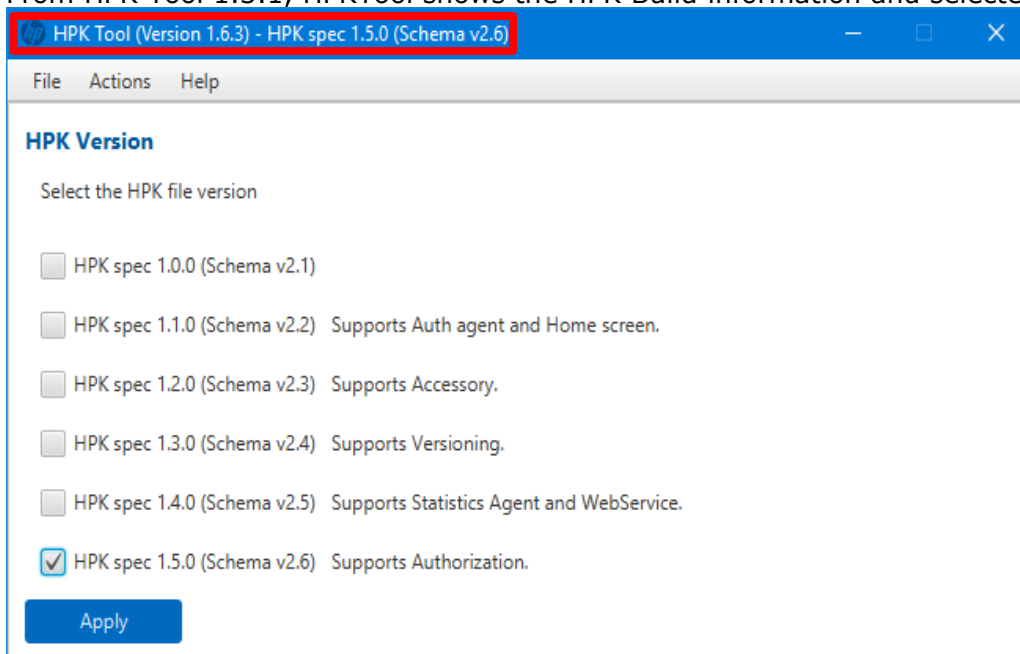

New title bar showing HPK Tool build information and HPK spec

10 Updating Client Credentials for attestation test

HPKTool provides the menu to update attestation information in LDB(Link Debug Mode). For updating it, “adb” command should be added by path, if it’s not, developer can select path of adb file to click “select folder” after downloading adb.

1. Select Actions > Application Attestation.
2. Fill client credentials, then update information.

HPK Tool (Version 1.6.3) - HPK spec 1.5.0 (Schema v2.6)

File Actions Help

This page is for updating client credentials for supporting App Attestation Debug Flow.

HPK File

UUID

Host

User Name

LDB Service Key

Client credentials

```
[
  {
    "client_id": "",
    "client_secret": ""
  }
]
```

Command Location

An example for configuring the hpk file version

NOTE: “adb” is part of Android SDK Platform Tools. It can be downloaded on Android Developer web page.

11 Command line HPKTool

SDK provides command line HPKTool. Execute `./hpktool` in shell for running on Linux or Type `HPKTool-cli.exe <<options>>` in windows command for running on Windows.

Here's an example to check commands with `--help` option.

`./hpktool or ./hpktool --help`

```
HPK Tool Version 1.6.3(20251111)
Usage: <HPK Command line Tool-file> {command} [option1] [option2] ...
<HPK Command line Tool-file> -> HPKTool-cli.exe

Commands:
--create          Create HPK file from specified field values
--xml             Create HPK file using existing Web application manifest file
--generate        Generate template file for creating hpk.xml
--install         Install application to the workpath device
--uninstall       Uninstall application
--config-get      Retrieve the configuration of the installed application
--config-update   Update the configuration of the installed application
--provider-list   Retrieve the provider list
--attestation-update Updating client credentials for supporting App Attestation Debug Flow.
--help           Shows this help
--app-list        Retrieve the application list
--app-detail      Retrieve the details of application

Creating a HPK package file using auto-created hpk.xml with provided fields
Options (* = required): for --create:
* --output <String: hpk-file>
Output HPK package file path
* --installfile <String: install-file>
Install file path
* --uuid <String: uuid>
UUID associated with Application (RFC 4122)
* --name <String: app-name>
Name of Application that will be shown on panel
* --vendor <String: vendor>
Name of Vendor that developed Application
--date <String: yyyyymmdd>
Date of creation package for Application (default current date)
--defaultconfig <String: defaultconfig>
The file name that included configuration
--subactivity1 <String: uuid,package/Activity,(Optional)type>
1st Details of Sub application which is a part of parent application
--subactivity2 <String: uuid,package/Activity,(Optional)type>
2nd Details of Sub application which is a part of parent application
--subactivity3 <String: uuid,package/Activity,(Optional)type>
3rd Details of Sub application which is a part of parent application
--subactivity4 <String: uuid,package/Activity,(Optional)type>
4th Details of Sub application which is a part of parent application
--subactivity5 <String: uuid,package/Activity,(Optional)type>
5th Details of Sub application which is a part of parent application
--linkauthagent <String: -p:name={"":""} -p:description={"":""} -p:url=package/activity (Optional)-
p:preprompt=enablePrePrompt>
Details for adding Authentication Agent
--statisticsagent <String: -s:name={"":""} -s:description={"":""} (Optional)-
s:ackrequiredfordelete=enableAckRequiredForDelete>
Details for
adding Statistics Agent
--home, --usehomescreenmode <String: enable-homescreen-mode>
Flag to set application as home screen
--default, --sethomescreenasdefault <String: set-as-default>
Flag to set as default homescreen for launching automatically after installation
--authorization <String: -a:name={"":""} -a:description={"":""}>
Details for adding Authorization
--accessory1 <String: type,vender-id,product-id,(Optional)serial-number>
#1 Details of accessories which need to be registered automatically for installation
```

```

--accessory2 <String: type,vender-id,product-id,(Optional)serial-number>
#2 Details of accessories which need to be registered automatically for installation
--accessory3 <String: type,vender-id,product-id,(Optional)serial-number>
#3 Details of accessories which need to be registered automatically for installation
--accessory4 <String: type,vender-id,product-id,(Optional)serial-number>
#4 Details of accessories which need to be registered automatically for installation
--accessory5 <String: type,vender-id,product-id,(Optional)serial-number>
#5 Details of accessories which need to be registered automatically for installation
--accessory6 <String: type,vender-id,product-id,(Optional)serial-number>
#6 Details of accessories which need to be registered automatically for installation
--accessory7 <String: type,vender-id,product-id,(Optional)serial-number>
#7 Details of accessories which need to be registered automatically for installation
--accessory8 <String: type,vender-id,product-id,(Optional)serial-number>
#8 Details of accessories which need to be registered automatically for installation
--accessory9 <String: type,vender-id,product-id,(Optional)serial-number>
#9 Details of accessories which need to be registered automatically for installation
--accessory10 <String: type,vender-id,product-id,(Optional)serial-number>
#10 Details of accessories which need to be registered automatically for installation
--webservice <String: -w:name={"":""} -w:description={"":""} -
w:endpoint=method,category,absolutePath,authType:method,category,absolutePath,authType:...>
Details of webServices
--platformversion, --target <String: platform-version>
Target Workpath Platform version
--schemaversion <String: schema-version>
HPK schema version
Application is generated based on provided field values and HPK package is created containing generated
manifest and provided install file
Example: <HPK Command line Tool-file> --create --output test.hpk --installfile test.apk --uuid
1234abcd-1234-1234-0000-12345678abcd --name "Test Application" --vendor "My Company"
Example: <HPK Command line Tool-file> --create --output test.hpk --installfile test.apk --uuid
1234abcd-1234-1234-0000-12345678abcd --name "Test Application" --vendor "My Company" --subactivity1
1234abcd-1234-1234-0000-
12345678abce,com.hp.workpath.sample.testsample/com.hp.workpath.sample.testsample.SubActivity
Example: <HPK Command line Tool-file> --create --output test.hpk --installfile test.apk --uuid
1234abcd-1234-1234-0000-12345678abcd --name "Test Application" --vendor "My Company" --defaultconfig
test.json
Example: <HPK Command line Tool-file> --create --output test.hpk --installfile test.apk --uuid
1234abcd-1234-1234-0000-12345678abcd --name "Test Application" --vendor "My Company" --linkauthagent -
p:name={"\"en-US\"\":\"usName\"\",\"ko-KR\"\":\"krName\""} -p:description={"\"en-
US\"\":\"usDes\"\",\"ko-KR\"\":\"krDes\""} -p:url=package/activity -p:preprompt=false
Example: <HPK Command line Tool-file> --create --output test.hpk --installfile test.apk --uuid
1234abcd-1234-1234-0000-12345678abcd --name "Test Application" --vendor "My Company" --statisticsagent
-s:name={"\"en-US\"\":\"usName\"\",\"ko-KR\"\":\"krName\""} -s:description={"\"en-
US\"\":\"usDes\"\",\"ko-KR\"\":\"krDes\""} -s:ackrequiredfordelete=false
Example: <HPK Command line Tool-file> --create --output test.hpk --installfile test.apk --uuid
1234abcd-1234-1234-0000-12345678abcd --name "Test Application" --vendor "My Company" --schemaversion
v2.5
Example: <HPK Command line Tool-file> --create --output test.hpk --installfile test.apk --uuid
1234abcd-1234-1234-0000-12345678abcd --name "Test Application" --vendor "My Company" --home true --
default true
Example: <HPK Command line Tool-file> --create --output test.hpk --installfile test.apk --uuid
1234abcd-1234-1234-0000-12345678abcd --name "Test Application" --vendor "My Company" --accessory1
OWNED,1008,69,NULL --accessory2 "SHARED,7590,272, "
Example: <HPK Command line Tool-file> --create --output test.hpk --installfile test.apk --uuid
1234abcd-1234-1234-0000-12345678abcd --name "Test Application" --vendor "My Company" --platformversion
29.7
Example: <HPK Command line Tool-file> --create --output test.hpk --installfile test.apk --uuid
1234abcd-1234-1234-0000-12345678abcd --name "Test Application" --vendor "My Company" --webservice -
w:name={"\"en-US\"\":\"usName\"\",\"ko-KR\"\":\"krName\""} -w:description={"\"en-
US\"\":\"usDes\"\",\"ko-KR\"\":\"krDes\""} -
w:endpoint=get,com.hp.workpath.sample.webservice,com.hp.workpath.sample.webservice.services.WebServiceT
ask,none:delete,com.hp.workpath.sample.webservice,com.hp.workpath.sample.webservice.services.WebService
Task,x-auth
V2.6
Example: <HPK Command line Tool-file> --create --output test.hpk --installfile test.apk --uuid
1234abcd-1234-1234-0000-12345678abcd --name "Test Application" --vendor "My Company" --authorization -
a:name={"\"en-US\"\":\"usName\"\",\"ko-KR\"\":\"krName\""} -a:description={"\"en-
US\"\":\"usDes\"\",\"ko-KR\"\":\"krDes\""}

```

```

Creating a HPK package file using provided hpk.xml file
Options (* = required): for --xml:
* --output <String: hpk-file>          Output HPK package file path
* --manifest <String: xml-file>        App XML file path
* --installfile <String: install-file>  Install file path
--defaultconfig <String: defaultconfig> The file name that included configuration
Provided xml file is validated for correct values and HPK package is created containing provided
manifest and install files
Example: <HPK Command line Tool-file> --xml --output test.hpk --installfile test.apk --manifest hpk.xml

Installing a HPK package file in device
Options (* = required): for --install:
* --installfile <String: install-file>  Install file path
* --host <String: host>                 Device IP Address (ex. 192.168.1.1)
--password <String: password>          Password for admin account (default empty)
--force                                Force Install options enable (default false)
Example: <HPK Command line Tool-file> --install --installfile test.hpk --host 192.168.1.1 --password
1234

Uninstalling the installed application
Options (* = required): for --uninstall:
* --uuid <String: uuid>                 UUID associated with Application (RFC 4122)
* --host <String: host>                 Device IP Address (ex. 192.168.1.1)
--password <String: password>          Password for admin account (default empty)
Example: <HPK Command line Tool-file> --uninstall --uuid 1234abcd-1234-1234-0000-12345678abcd --host
192.168.1.1 --password 1234

Retrieving a configuration of the installed application with specified UUID
Options (* = required): for --config-get:
* --uuid <String: uuid>                 UUID associated with Application (RFC 4122)
* --host <String: host>                 Device IP Address (ex. 192.168.1.1)
--password <String: password>          Password for admin account (default empty)
Example: <HPK Command line Tool-file> --config-get --uuid 1234abcd-1234-1234-0000-12345678abcd --host
192.168.1.1 --password 1234

Updating a configuration of the installed application with specified UUID
Options (* = required): for --config-update:
* --uuid <String: uuid>                 UUID associated with Application (RFC 4122)
* --host <String: host>                 Device IP Address (ex. 192.168.1.1)
--password <String: password>          Password for admin account (default empty)
* --data <String: data>                 Application configuration data in JSON
Example: <HPK Command line Tool-file> --config-update --uuid 1234abcd-1234-1234-0000-12345678abcd --
host 192.168.1.1 --password 1234 --data "{\"test\": 123}"

Retrieving list of the installed application
Options (* = required): for --app-list
* --host <String: host>                 Device IP Address (ex. 192.168.1.1)
--password <String: password>          Password for admin account (default empty)
Example: <HPK Command line Tool-file> --app-list --host 192.168.1.1 --password 1234

Retrieve a detail of installed application with specified UUID
Options (* = required): for --app-detail
* --uuid <String: uuid>                 UUID associated with Application (RFC 4122)
* --host <String: host>                 Device IP Address (ex. 192.168.1.1)
--password <String: password>          Password for admin account (default empty)
Example: <HPK Command line Tool-file> --app-detail --uuid 1234abcd-1234-1234-0000-12345678abcd --host
192.168.1.1 --password 1234

Retrieving list of the provider
Options (* = required): for --provider-list
* --host <String: host>                 Device IP Address (ex. 192.168.1.1)
--password <String: password>          Password for admin account (default empty)
Example: <HPK Command line Tool-file> --provider-list --host 192.168.1.1 --password 1234

Updating client credentials for supporting App Attestation Debug Flow.
Options (* = required): for --attestation-update
* --uuid <String: uuid>                 UUID associated with Application (RFC 4122)
* --host <String: host>                 Device IP Address (ex. 192.168.1.1)
--password <String: password>          Password for admin account (default empty)

```

```
* --username <String: username>      A user name on your user profile at HP.io developer portal.
* --ldbkey <String: ldbkey>          A password (User profile at HP.io developer portal > Service
Keys Tab)
* --credentials <String: credentials> JSON array containing all the client credentials.
--cmdloc <String: cmdloc>            Command location
Example: <HPK Command line Tool-file> --attestation-update --uuid 1234abcd-1234-1234-0000-12345678abcd
--host 192.168.1.1 --password 1234 --username test_username --ldbkey test_ldbkey --credentials
"[{"client_id":"test_client_id","client_secret":"test_client_secret"}]"
```

12 Trouble Shooting

12.1 SSL communication error

Description

“Communication Error (1001) - The connector failed to complete the communication with the server”

This error may occur when communicating using DHE cipher suites. This is due to the difference between the device and the tool’s cipher implementation.

Workaround

Disable device’s DHE cipher suites.

- 1.Access EWS with browser.
- 2.Log in and navigate to Networking > Secure Communication page.
- 3.Set DHE ciphers from Active to Available.

13 Legal notice

The information contained in this documentation is subject to change without notice.

HP Inc. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. HP Inc. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this documentation may be transformed, reproduced, or translated to another language without prior.

© Copyright 2018 HP Development Company, L.P.

14 Support

The HP Solution Business Program (SBP) support staff has established a procedure for submitting technical problems to the Incident Call Center (ICC). All SBP members must be registered with the Solution Programs Portal (SPP) to access technical support and other feedback or reporting activities.

Log on to the portal at <<http://www.hp.com/go/solutions>> to submit your issue to technical support. After you submit the issue, a report will be generated for the Incident Call Center. A Technical Support representative will be assigned to validate the incident and to work on a fix. HP will contact you for further information regarding the incident as quickly as possible.