



Workpath SDK Access Sample Overview

Product Group: HP Workpath SDK

Version: 1.6.3

Revised: November 11, 2025

HP Inc.
11311 Chinden Blvd.
Boise, ID 83714 USA

HP Confidential

Table of Contents

1	Introduction	3
1.1	Document conventions	3
2	Access Sample on a device	4
3	Principal object with authentication agent	5
4	Access Sample Flow.....	6
5	Initializing SDK.....	7
6	Checking AccessService Capability	9
7	Obtaining user information.....	10
8	Legal notice	12
9	Support.....	13

1 Introduction

Access Sample provides use case scenario how to obtain user information using AccessService of the Workpath SDK API.


1.1 Document conventions

The following conventions are used throughout this document to define, describe, and discuss the API: function prototypes, data structure definitions, enumerated constants.

- **Name** – Bold signifies item names such as button names and menu items.
- <name> – Angle brackets mark URLs.
- {value} – Curly braces represent values to be replaced.
- Identifiers for defined constants use all UPPERCASE letters.
- *Name* – Italicized type refers to formal function parameters, data structure types and fields, and other defined or enumerated types in the text body (for example, *streamtype*).
- Numbers are in decimal format unless otherwise noted.
- Name - Monospaced type is used for code fragments, function prototypes and data type definitions.
- Function names are usually accompanied by parentheses (for example, `function()`).

2 Access Sample on a device

Access Sample shows the user information which is associated with the current authentication context and includes the sample codes for using Access Service API.

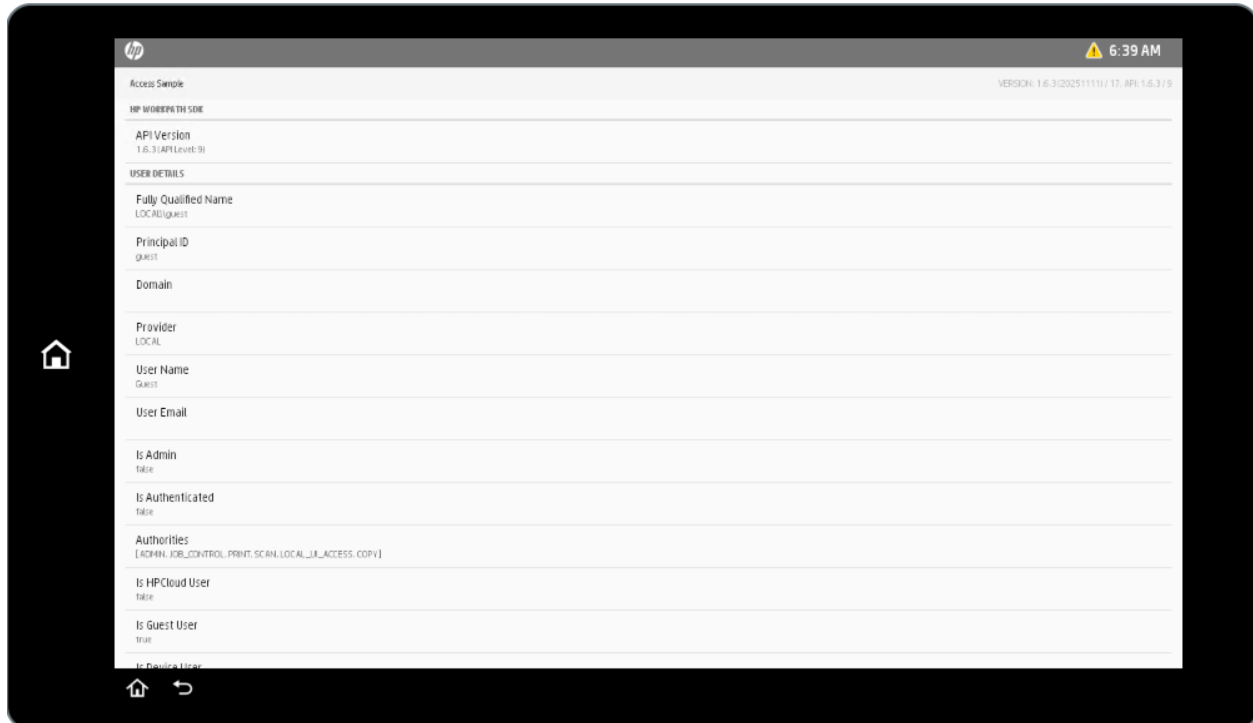

A main activity of Access Sample

3 Principal object with authentication agent


Principal object includes user information such as user name, domain and email. Also, it contains user type and UUID of the authenticated agent.

When a user signs in as administrator, Principal object returns user data of administrator and the value of `isAdmin` as true.



A data of Access Sample when admin signs in

4 Access Sample Flow

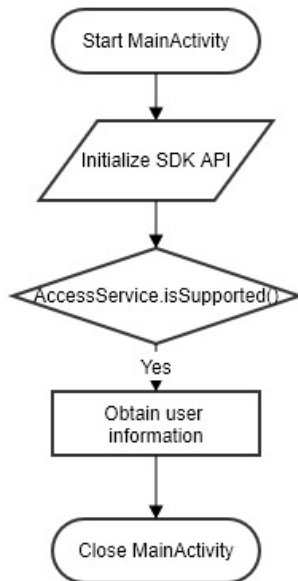

Flows of Access Sample

5 Initializing SDK

Workpath application requires to initialize the SDK services when starts with an activity for accessing the SDK services. The classes in `com.hp.workpath.api.Workpath` provides `initialize` method for this.

The sample shows how to initialize SDK.

1. Call `initialize` method of Workpath SDK on resume event, and clear it on pause event. It is for calling initialization when an activity is switched. Refer to `MainActivity.java`.

```
1. @Override
2. protected void onResume() {
3.     super.onResume();
4.
5.     // call init task
6.     mInitializationTask = new InitializationTask(this);
7.     mInitializationTask.execute();
8. }
9.
10. @Override
11. protected void onPause() {
12.     super.onPause();
13.
14.     mInitializationTask.cancel(true);
15.     mInitializationTask = null;
16.
17.     ...
18. }
```

Initialization call in Activity Resume

2. Make a task and call `initialize` method with catching exceptions. If Workpath SDK is not initialized, `sdk exception` or `security exception` will be thrown. Refer to `InitializationTask.java`.

```

1. @Override
2. protected InitStatus doInBackground(final Void... params) {
3.     InitStatus status = InitStatus.NO_ERROR;
4.
5.     try {
6.         // initialize Workpath SDK
7.         Workpath.getInstance().initialize(mContextRef.get());
8.     } catch (SdkUnsupportedException sue) {
9.         Log.e(TAG, "SDK is not supported!", sue);
10.        mException = sue;
11.        status = InitStatus.INIT_EXCEPTION;
12.    } catch (SecurityException se) {
13.        Log.e(TAG, "Security exception!", se);
14.        mException = se;
15.        status = InitStatus.INIT_EXCEPTION;
16.    }
17.
18.    // Check if AccessoryService is supported
19.    if (status == InitStatus.NO_ERROR
20.        && !AccessoryService.isSupported(mContextRef.get())) {
21.        // AccessoryService is not supported on this device
22.        status = InitStatus.NOT_SUPPORTED;
23.    }
24.    return status;
25. }

```

Exception handling by initializationTask

6 Checking AccessService Capability

The `isSupported` method returns whether the `AccessService` is supported or not. Refer to `InitializationTask.java`.

```
1. // Check if AccessService is supported
2. if (status == InitStatus.NO_ERROR
3.     && !AccessService.isSupported(mContextRef.get())) {
4.     // AccessService is not supported on this device
5.     status = InitStatus.NOT_SUPPORTED;
6. }
```

Available service check by `isSupported()`

7 Obtaining user information

AccessService includes the methods to retrieve the current principals from a device. If user signs in on a device, authenticated user information will be returned through `AccessService.getCurrentPrincipal()` method.



A main activity of Access Sample with authenticated user on a device

Access Sample shows how to get user details such as fullyQualifiedName, principalId, domain, provider, username and userEmail.

Refer to UserDetailsReaderTask.java

```

1. // get user principal information using AccessService API
2. Principal currentUser = AccessService.getCurrentPrincipal(mContextRef.get().getApplicat
   ionContext(), result);
3.
4. // first check whether Result is fine or not
5. if (result.getCode() == Result.RESULT_OK && currentUser != null) {
6.     values.put(UserDetails.FULLY_QUALIFIED_NAME, currentUser.getFullyQualified_name());

7.     values.put(UserDetails.PRINCIPAL_ID, currentUser.getPrincipalId());
8.     values.put(UserDetails.DOMAIN, currentUser.getDomain());
9.     values.put(UserDetails.PROVIDER, currentUser.getProvider());
10.    values.put(UserDetails.USER_NAME, currentUser.getUsername());
11.    values.put(UserDetails.PASSWORD, currentUser.getPassword()); //not supported
12.    values.put(UserDetails.USER_EMAIL, currentUser.getUserEmail());
13.    values.put(UserDetails.IS_ADMIN, String.valueOf(currentUser.isAdmin()));
14.    values.put(UserDetails.IS_AUTHENTICATED, String.valueOf(currentUser.isAuthenticated
   ()));
15.    values.put(UserDetails.IS_HP_CLOUD_USER, String.valueOf(currentUser.isHPCloudUser()
   ));
16.    values.put(UserDetails.IS_GUEST_USER, String.valueOf(currentUser.isGuestUser()));
17.    values.put(UserDetails.IS_DEVICE_USER, String.valueOf(currentUser.isDeviceUser()));

18.    values.put(UserDetails.IS_SERVICE_USER, String.valueOf(currentUser.isServiceUser()
   ));
19.    values.put(UserDetails.IS_SMART_CARD_USER, String.valueOf(currentUser.isSmartCardUs
   er()));
20.    values.put(UserDetails.PROVIDER_UUID, String.valueOf(currentUser.getProviderUUID()
   ));
21.
22.    final List<Principal.SimpleAuthority> simpleAuthorities = currentUser.getSimpleAuth
   orities();
23.    final StringBuilder authorities = new StringBuilder();
24.    if (simpleAuthorities != null) {
25.        for (Principal.SimpleAuthority authority : simpleAuthorities) {
26.            if (authority != null) {
27.                authorities.append(authority.name()).append(", ");
28.            }
29.        }
30.    }
31.    values.put(UserDetails.SIMPLE_AUTHORITIES, authorities.toString());
32. } else {
33.     return null;
34. }

```

Retrieve user details by getCurrentPrincipal()

8 Legal notice

The information contained in this documentation is subject to change without notice.

HP Inc. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. HP Inc. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this documentation may be transformed, reproduced, or translated to another language without prior.

© Copyright 2018 HP Development Company, L.P.

9 Support

The HP Solution Business Program (SBP) support staff has established a procedure for submitting technical problems to the Incident Call Center (ICC). All SBP members must be registered with the Solution Programs Portal (SPP) to access technical support and other feedback or reporting activities.

Log on to the portal at <<http://www.hp.com/go/solutions>> to submit your issue to technical support. After you submit the issue, a report will be generated for the Incident Call Center. A Technical Support representative will be assigned to validate the incident and to work on a fix. HP will contact you for further information regarding the incident as quickly as possible.