



Workpath SDK Email Sample Overview

Product Group: HP Workpath SDK

Version: 1.6.3

Revised: November 11, 2025

HP Inc.
11311 Chinden Blvd.
Boise, ID 83714 USA

HP Confidential

Table of Contents

1 Introduction 3

1.1 Document conventions3

2 Email Sample on a device 4

3 Email Sample Flow..... 5

4 Initializing SDK..... 6

5 Getting default email value which is configured on device 8

6 Sending Email 9

7 Legal notice 10

8 Support..... 11

1 Introduction

Email Sample provides use case scenario how to send email in Workpath enabled device.

1.1 Document conventions


The following conventions are used throughout this document to define, describe, and discuss the API: function prototypes, data structure definitions, enumerated constants.

- **Name** – Bold signifies item names such as button names and menu items.
- <name> – Angle brackets mark URLs.
- {value} – Curly braces represent values to be replaced.
- Identifiers for defined constants use all UPPERCASE letters.
- *Name* – Italicized type refers to formal function parameters, data structure types and fields, and other defined or enumerated types in the text body (for example, *streamtype*).
- Numbers are in decimal format unless otherwise noted.
- `Name` - Monospaced type is used for code fragments, function prototypes and data type definitions.
- Function names are usually accompanied by parentheses (for example, `function()`).

2 Email Sample on a device


Email Sample is a sample app that shows how to:

- Retrieve default configuration from device
- Send email with device smtp information or custom smtp information

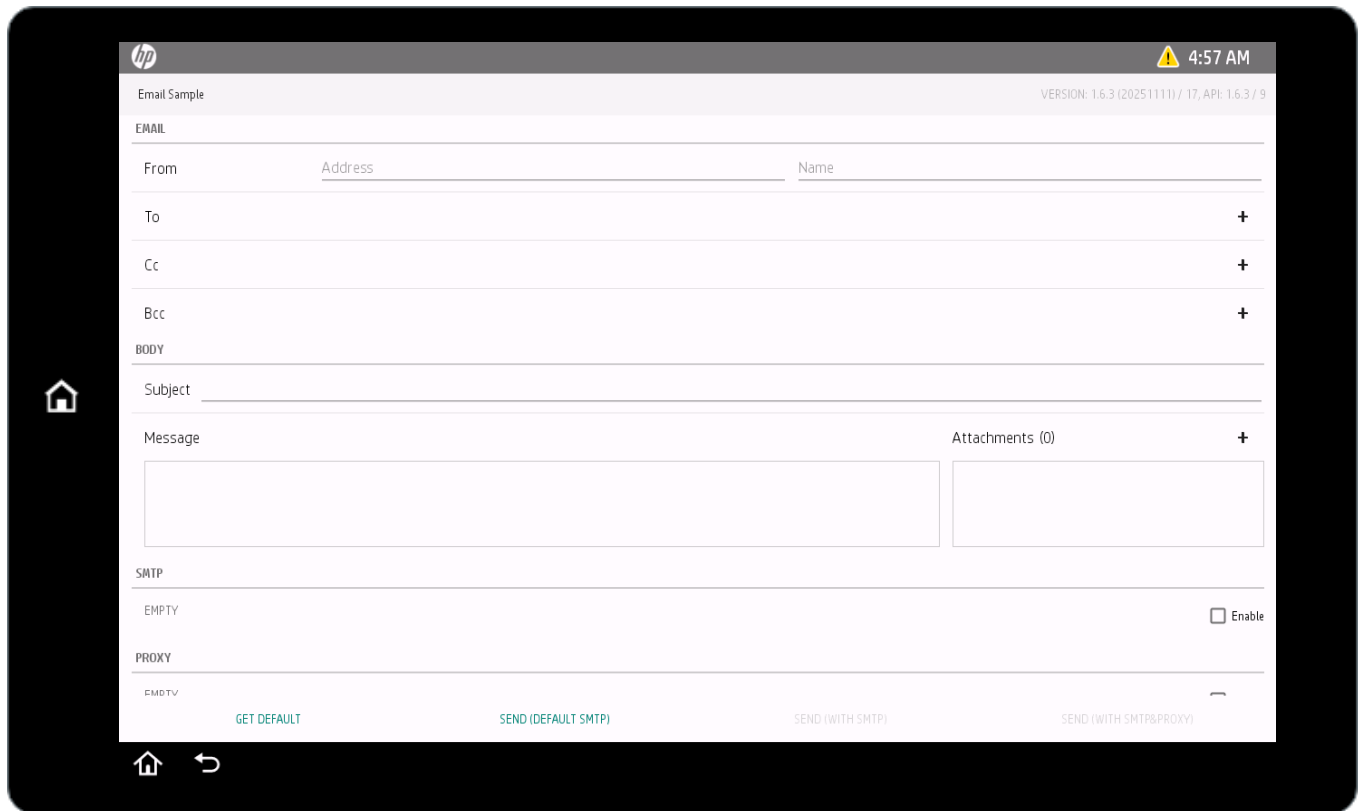

A main activity of Email Sample

3 Email Sample Flow

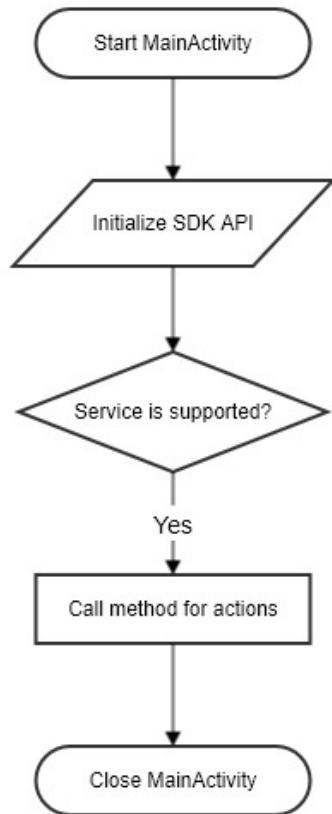

Flow of Email Sample

4 Initializing SDK

Application requires initializing the SDK services when starts with an activity for accessing the SDK services. The `com.hp.workpath.api.Workpath` includes `initialize()` method for this.

The sample shows how to initialize SDK.

1. Call `initialize()` method of Workpath SDK on resume event, and clear it on pause event. It is for calling initialization when an activity is switched. Refer to `MainActivity.java`.

```
1. @Override
2. protected void onResume() {
3.     super.onResume();
4.
5.     mContainer.setEnabled(false);
6.
7.     mInitializationTask = new InitializationTask(this);
8.     mInitializationTask.execute();
9. }
10.
11. @Override
12. protected void onPause() {
13.     super.onPause();
14.
15.     mInitializationTask.cancel(true);
16.     mInitializationTask = null;
17.
18.     if (mAlertDialog != null) {
19.         mAlertDialog.dismiss();
20.         mAlertDialog = null;
21.     }
22. }
```

Initialization call in Activity Resume

2. Make a task and call `initialize()` method with catching exceptions. If Workpath SDK is not initialized, sdk exception or security exception will be thrown. Refer to `InitializationTask.java`.

```

1. @Override
2. protected InitStatus doInBackground(final Void... params) {
3.     InitStatus status = InitStatus.NO_ERROR;
4.
5.     try {
6.         // initialize the Workpath SDK
7.         Workpath.getInstance().initialize(mContextRef.get());
8.     } catch (final SsdkUnsupportedException e) {
9.         Log.e(TAG, "SDK is not supported!", e);
10.        mException = e;
11.        status = InitStatus.INIT_EXCEPTION;
12.    } catch (final SecurityException e) {
13.        Log.e(TAG, "Security exception!", e);
14.        mException = e;
15.        status = InitStatus.INIT_EXCEPTION;
16.    }
17.
18.    // Check if Email is supported
19.    if (status == InitStatus.NO_ERROR
20.        && ! Email.isSupported(mContextRef.get())) {
21.        // Email is not supported on this device
22.        status = InitStatus.NOT_SUPPORTED;
23.    }
24.
25.    return status;
26. }

```

Exception handling by initializationTask

5 Getting default email value which is configured on device

SDK provides API to get default email value from device. The code snippet below shows example of such queries :

```
1. @Override
2. protected EmailAttributes doInBackground(Void... voids) {
3.     return Email.getDefault(mContextRef.get(), mResult);
4. }
```

Reading the default value in LoadEmailDefaultsTask.java

6 Sending Email

Email provides API per options for sending email on Workpath. It allows application can send a mail by its own smtp server.

The code snippet below shows example of such queries :

```
1. switch (sendType) {
2.     case SEND:
3.         Email.send(mContextRef.get(), emailAttributes, mResult);
4.         break;
5.     case SEND_WITH_SMTP:
6.         Email.send(mContextRef.get(), emailAttributes, smtpAttributes, mResult);
7.         break;
8.     case SEND_WITH_SMTP_PROXY:
9.         Email.send(mContextRef.get(), emailAttributes, smtpAttributes, proxyAttributes,
10.            mResult);
11.         break;
11. }
```

Sending email with options in SendEmailTask.java

7 Legal notice

The information contained in this documentation is subject to change without notice.

HP Inc. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. HP Inc. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this documentation may be transformed, reproduced, or translated to another language without prior.

© Copyright 2018 HP Development Company, L.P.

8 Support

The HP Solution Business Program (SBP) support staff has established a procedure for submitting technical problems to the Incident Call Center (ICC). All SBP members must be registered with the Solution Programs Portal (SPP) to access technical support and other feedback or reporting activities.

Log on to the portal at <<http://www.hp.com/go/solutions>> to submit your issue to technical support. After you submit the issue, a report will be generated for the Incident Call Center. A Technical Support representative will be assigned to validate the incident and to work on a fix. HP will contact you for further information regarding the incident as quickly as possible.