



Workpath SDK HomeScreen Overview

Product Group: HP Workpath SDK

Version: 1.6.3

Revised: November 11, 2025

HP Inc.
11311 Chinden Blvd.
Boise, ID 83714 USA

HP Confidential

Table of Contents

1	Introduction	3
1.1	Document conventions	3
2	HomeScreen	4
2.1	Creating “Launcher” application	4
2.2	Enabling home screen mode using HPKTool	5
3	Home screen mode in EWS	6
4	Launcher Sample on a device.....	7
5	Broadcast Events	8
6	Going to HP launcher from Workpath	9
7	Legal notice	10
8	Support.....	11

1 Introduction

This document provides information for HomeScreen feature and Launcher Sample.

1.1 Document conventions

The following conventions are used throughout this document to define, describe, and discuss the API: function prototypes, data structure definitions, enumerated constants.

- **Name** – Bold signifies item names such as button names and menu items.
- <name> – Angle brackets mark URLs.
- {value} – Curly braces represent values to be replaced.
- Identifiers for defined constants use all UPPERCASE letters.
- *Name* – Italicized type refers to formal function parameters, data structure types and fields, and other defined or enumerated types in the text body (for example, *streamtype*).
- Numbers are in decimal format unless otherwise noted.
- Name - Monospaced type is used for code fragments, function prototypes and data type definitions.
- Function names are usually accompanied by parentheses (for example, `function()`).

2 HomeScreen

Home Screen is for making application as home screen. Any application can create “**Launcher**” type application, and have a configuration to enable home screen feature.

2.1 Creating “Launcher” application

Application can add category in manifest.xml to make Launcher type.

```

1. <?xml version="1.0" encoding="utf-8"?>
2. <manifest xmlns:android="http://schemas.android.com/apk/res/android"
3.     package="com.hp.workpath.sample.launchersample">
4.
5.     <application
6.         android:allowBackup="false"
7.         android:icon="@drawable/ic_launcher"
8.         android:label="@string/app_name"
9.         android:theme="@style/Theme.AppCompat.Light">
10.
11.         <activity
12.             android:name="com.hp.workpath.sample.launchersample.MainActivity"
13.             android:configChanges="keyboard|keyboardHidden|screenSize"
14.             android:windowSoftInputMode="stateAlwaysHidden"
15.             android:label="@string/app_name">
16.             <intent-filter>
17.                 <action android:name="android.intent.action.MAIN"/>
18.                 <category android:name="android.intent.category.DEFAULT" />
19.                 <category android:name="android.intent.category.LAUNCHER" />
20.                 <category android:name="android.intent.category.HOME" />
21.             </intent-filter>
22.         </activity>
23.     </application>
24. </manifest>
25.
26.

```

Launcher application

NOTE: “<category android:name="android.intent.category.DEFAULT" />” has been added since SDK 1.3.1 release to avoid back to OMNI when user press the home button.

2.2 Enabling home screen mode using HPKTool

HPKTool provides options to enable home screen mode as follows:

Home Screen App mode	Details
Home Screen App	The option is for enabling application onto Home Screen Mode. If it's enabled, application comes the first page instead of HP launcher.
Set as default	The option is for setting application to default Home Screen while installation.

HPK Tool (Version 1.6.3) - HPK spec 1.5.0 (Schema v2.6)

File Actions Help

This page is for creating HPK

Install File: LauncherSample.apk [Select File]

UUID: 11111111-1111-1111-8881-111111111111 [Generate]

Name: Launcher Sample

Vendor Name: HP

Platform version: 31.9 [Refresh]

Date: 20251111

Default Config: Default Configuration (Optional) [Select File] [Clear]

AuthAgent: AuthAgent Name [Add] [Delete]

Authorization: Authorization Name [Add] [Delete]

Home Screen App: ☒ Use Home Screen mode ☒ Set as default

Accessory: [Add Table]

Type	Vendor ID (Decimal)	Product ID (Decimal)			
No Accessory					

WebService: WebService Name [Add] [Delete]


[Add Table]

Met	Category	Absolute Path	Auth		
-----	----------	---------------	------	--	--

Homescreen options by HPKTool

3 Home screen mode in EWS

EWS shows home screen applications in lists of “Home Screen Customization” menu. If home screen application is changed and applied, user will see home screen application on a device instead of HP launcher. It'll stay home screen app even if “Home” button or “Back” button is pressed.

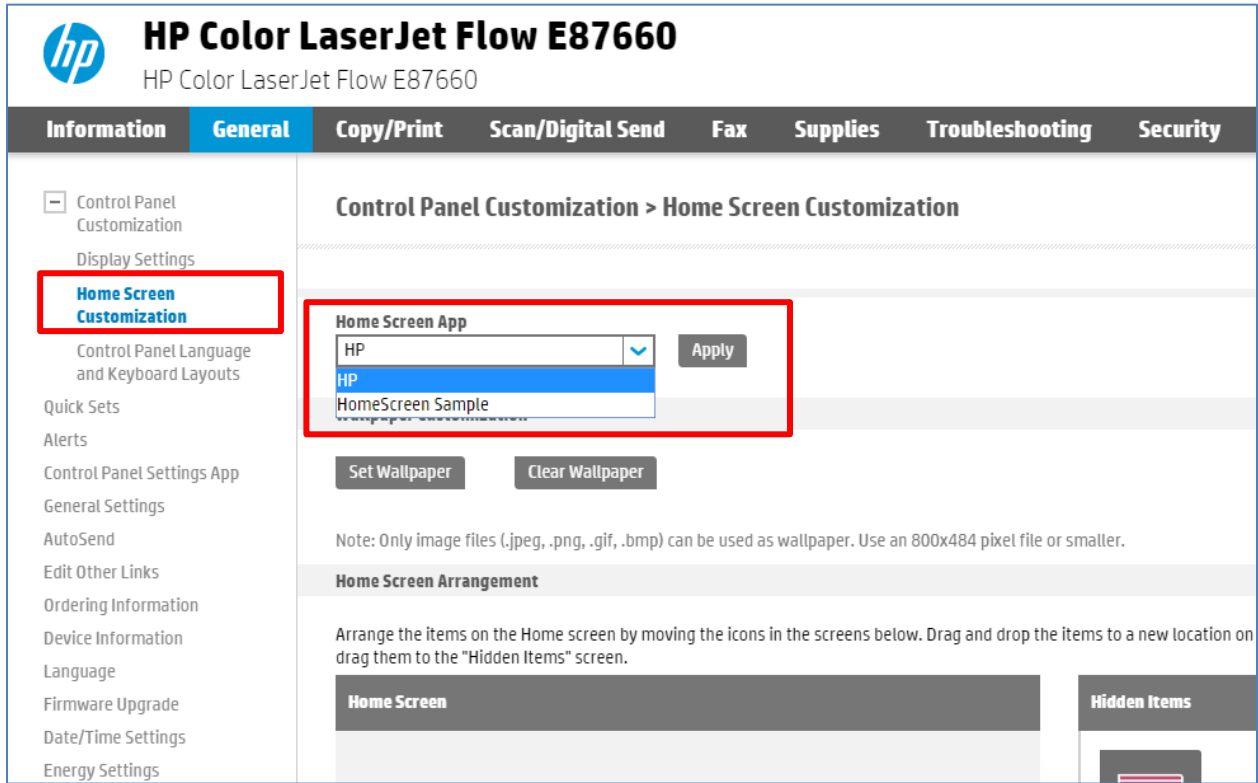

HP Color LaserJet Flow E87660
HP Color LaserJet Flow E87660

Information **General** Copy/Print Scan/Digital Send Fax Supplies Troubleshooting Security

Control Panel Customization
Display Settings
Home Screen Customization
Control Panel Language and Keyboard Layouts
Quick Sets
Alerts
Control Panel Settings App
General Settings
AutoSend
Edit Other Links
Ordering Information
Device Information
Language
Firmware Upgrade
Date/Time Settings
Energy Settings

Control Panel Customization > Home Screen Customization

Home Screen App
HP
HP
HomeScreen Sample
Apply


Set Wallpaper Clear Wallpaper

Note: Only image files (.jpeg, .png, .gif, .bmp) can be used as wallpaper. Use an 800x484 pixel file or smaller.

Home Screen Arrangement
Arrange the items on the Home screen by moving the icons in the screens below. Drag and drop the items to a new location on drag them to the "Hidden Items" screen.


Home Screen
Hidden Items

Homescreen menu on EWS

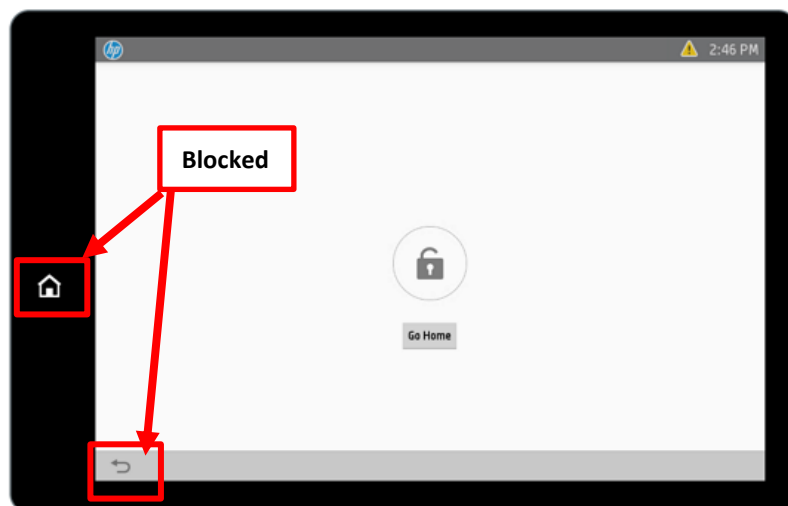

4 Launcher Sample on a device

The Workpath SDK provides Launcher sample to explain Home screen feature for escaping home screen mode, launching other application with uuid and working with accessory.

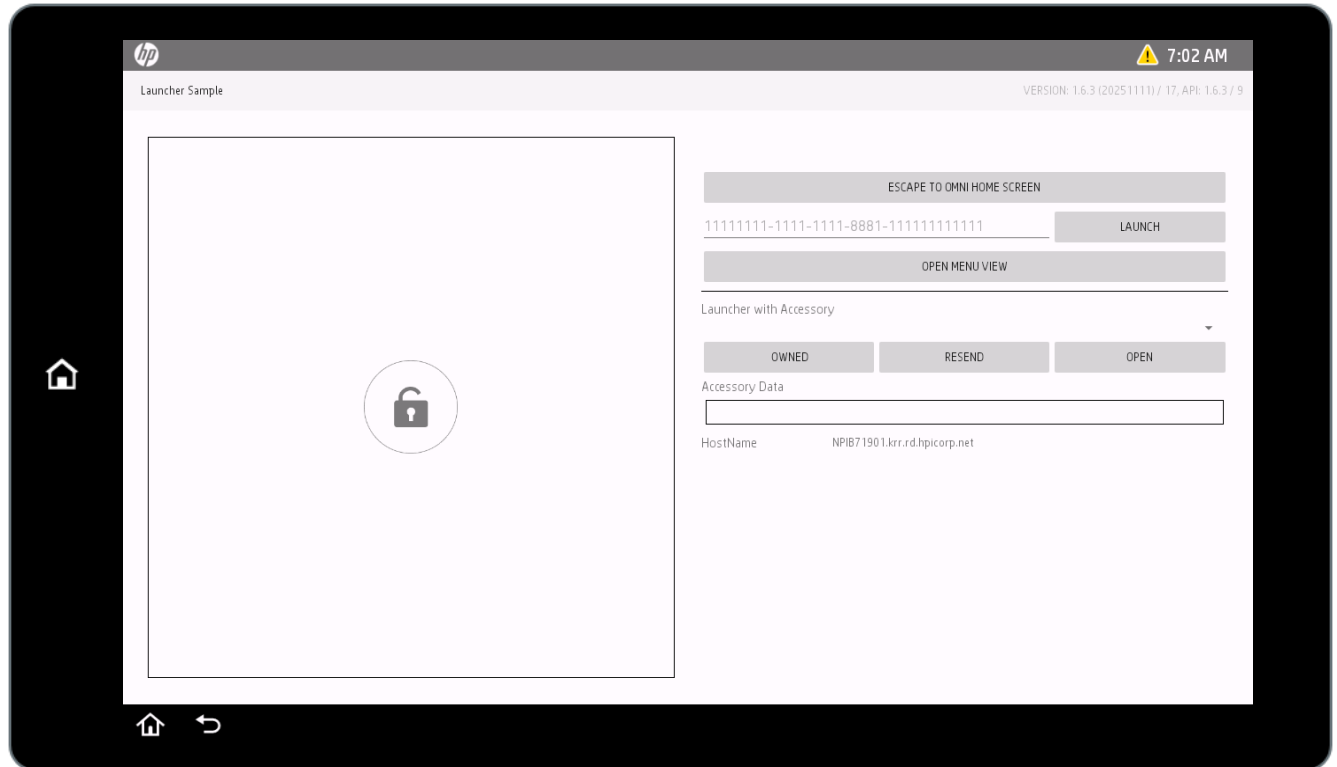

A Launcher Sample

5 Broadcast Events

Two new broadcast events have been added for launcher sample app.

- **com.hp.jetadvantage.link.action.WORKPATH_READY**
- **com.hp.jetadvantage.link.action.ACCESSORY_READY**

WORKPATH_READY

Check the intents of the module except for Accessory, and when all four (Access, Statistic, DeviceEvents, Storage) are gathered, WORKPATH_READY broadcast is sent to all apps.

Launcher can be started by receiving WORKPATH_READY broadcast instead of BOOT_COMPLETE. WORKPATH_READY checks the readiness status of each module of the SDK and informs the launcher app through broadcast. Then launcher can receive the broadcast to run or induce a specific action.

ACCESSORY_READY

ACCESSORY_READY is sent directly after checking only for accessory as an implicit broadcast without additional checking.

Accessory takes a long time to initialize unlike other modules. Therefore, you have to wait for initialization. App that uses Accessory must operate after receiving the broadcast.

```
1. filter.addAction("com.hp.jetadvantage.link.action.WORKPATH_READY");
2. filter.addAction("com.hp.jetadvantage.link.action.ACCESSORY_READY");
```

Intent filter used in MainActivity.java

```
1. private class SdkAccessoryReadyReceiver extends BroadcastReceiver {
2.     @Override
3.     public void onReceive(Context context, Intent intent) {
4.
5.         if(intent.getAction().equals("com.hp.jetadvantage.link.action.WORKPATH_READY")) {
6.             Log.i(TAG, "SDK initialized");
7.             Toast.makeText(context, "SDK initialized", Toast.LENGTH_LONG).show();
8.         } else
9.         if(intent.getAction().equals("com.hp.jetadvantage.link.action.ACCESSORY_READY")) {
10.            Log.i(TAG, "Accessory initialized");
11.            Toast.makeText(context, "Accessory initialized",
12.                Toast.LENGTH_LONG).show();
13.        }
14.    }
```

Broadcast Receiver for intents

6 Going to HP launcher from Workpath

LauncherService provides the feature to switch the page from Workpath to HP launcher(omni home). Launcher sample shows the example how to call LauncherService.

The code snippet below shows example of such queries :

```
1. private void launchHomeScreen() {
2.     Result result = new Result();
3.     LauncherService.launch(MainActivity.this, LaunchAction.HOME, result);
4.
5.     if (result.getCode() != Result.RESULT_OK) {
6.         showResult("LauncherService.launch()", result);
7.     }
8. }
```

Switching to HP launcher from Workpath in MainActivity.java

Application can also launch another application with UUID.

The code snippet below shows example of such queries :

```
1. private void launchApplication(String uuid) {
2.     Result result = new Result();
3.     LauncherService.launch(MainActivity.this, uuid, result);
4.
5.     if (result.getCode() != Result.RESULT_OK) {
6.         showResult("LauncherService.launch()", result);
7.     }
8. }
```

Launching to application

Locked State Error Case

Each app can be set to a locked state through account management (e.g., EWS, authorization, etc..).

If the app is locked from Home Screen, it will not launch and the following message will be displayed to the user.

[Code:RESULT_FAIL, Error Code: UNAUTHORIZED, Cause: The application is permission denied]



Config Sample

Locked app image

7 Legal notice

The information contained in this documentation is subject to change without notice.

HP Inc. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. HP Inc. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this documentation may be transformed, reproduced, or translated to another language without prior.

© Copyright 2018 HP Development Company, L.P.

8 Support

The HP Solution Business Program (SBP) support staff has established a procedure for submitting technical problems to the Incident Call Center (ICC). All SBP members must be registered with the Solution Programs Portal (SPP) to access technical support and other feedback or reporting activities.

Log on to the portal at <<http://www.hp.com/go/solutions>> to submit your issue to technical support. After you submit the issue, a report will be generated for the Incident Call Center. A Technical Support representative will be assigned to validate the incident and to work on a fix. HP will contact you for further information regarding the incident as quickly as possible.