



Workpath SDK Statistics Sample Overview

Product Group: HP Workpath SDK

Version: 1.6.3

Revised: November 11, 2025

HP Inc.
11311 Chinden Blvd.
Boise, ID 83714 USA

HP Confidential

Table of Contents

1	Introduction	3
1.1	Document conventions	3
2	Statistics Sample on a device	4
2.1	Statistics New APIs	5
2.2	Statistics Deprecated APIs	6
3	Statistics Sample Flow.....	7
4	Create Statistics Agent	8
5	Add permission in manifest	10
6	Initializing SDK.....	11
7	Checking StatisticsService Capability	12
8	Retrieve Statistics information from a device	13
9	Get last job information of an agent	14
10	Getting notification by Job event	15
11	Legal notice	16
12	Support.....	17

1 Introduction

Statistics Sample provides use case scenario how to get Statistics information on a device using StatisticsService of the HP Workpath SDK API.


1.1 Document conventions

The following conventions are used throughout this document to define, describe, and discuss the API: function prototypes, data structure definitions, enumerated constants.

- **Name** – Bold signifies item names such as button names and menu items.
- <name> – Angle brackets mark URLs.
- {value} – Curly braces represent values to be replaced.
- Identifiers for defined constants use all UPPERCASE letters.
- *Name* – Italicized type refers to formal function parameters, data structure types and fields, and other defined or enumerated types in the text body (for example, *streamtype*).
- Numbers are in decimal format unless otherwise noted.
- `Name` - Monospaced type is used for code fragments, function prototypes and data type definitions.
- Function names are usually accompanied by parentheses (for example, `function()`).

2 Statistics Sample on a device

Statistics Sample shows the code and the usage of example how to call StatisticsService on a device.

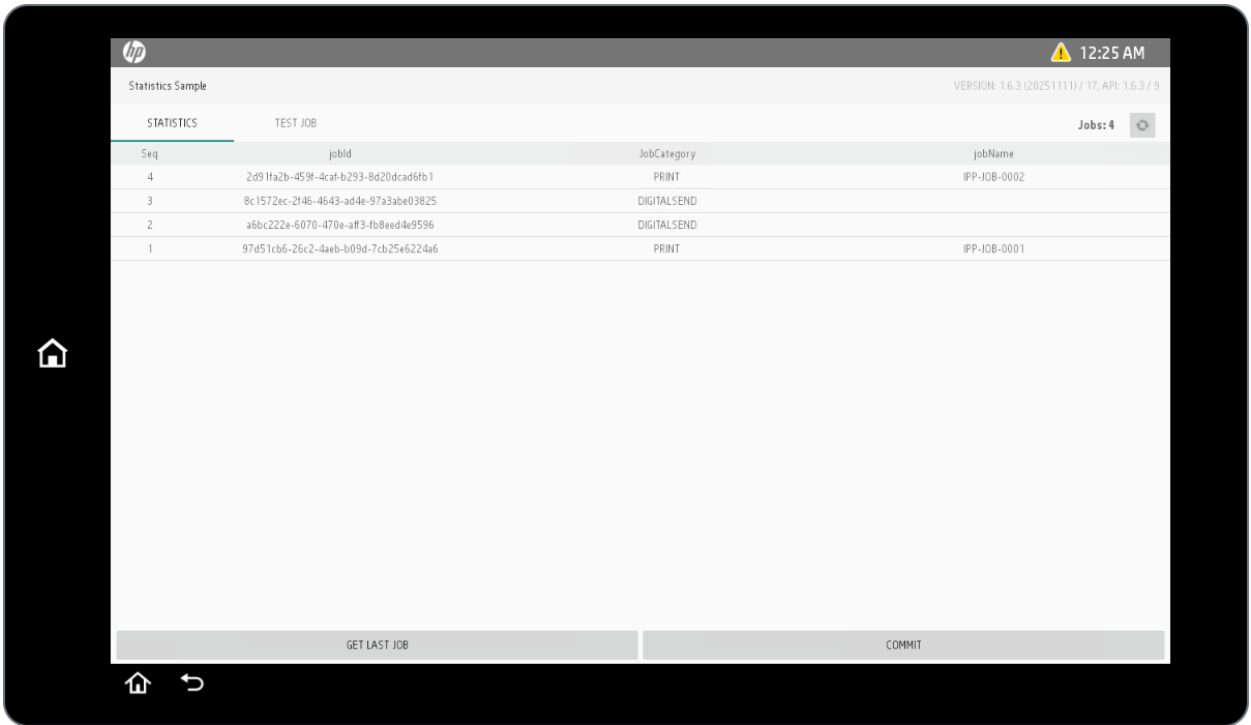

A main activity of Statistics Sample

2.1 Statistics New APIs

Below 7 new APIs have been to statistics sample.


Type	New API
<code>java.lang.Integer</code>	<code>getJobSequence()</code> Returns jobSequence for statistics job data
<code>static java.util.List <StatisticsJobData></code>	<code>getAllJobsList(android.content.Context context, Result result)</code> Returns all jobs of Statistics (maximum job count is 256 per each agent)
<code>static Statistics JobData</code>	<code>getJobInfoByJobSequence(android.content.Context context, int jobSequence, Result result)</code> Returns Statistics job information by specific job sequence
<code>static int</code>	<code>getLastCommittedJobSequence(android.content.Context context, Result result)</code> Returns the last committed job sequence
<code>static Statistics JobData</code>	<code>getLastCompletedJobInfo(android.content.Context context, Result result)</code> Returns the last completed job information
<code>static int</code>	<code>getLastCompletedJobSequence(android.content.Context context, Result result)</code> Returns the last completed job sequence
<code>abstract void</code>	<code>onComplete(int completedJobSequence)</code> Called to notify the client that a printer has event.

2.2 Statistics Deprecated APIs

Below 5 old APIs have been deprecated from statistics sample.

Type	Deprecated API
<code>static StatisticsJobData</code>	<code>getJobInfo(android.content.Context context, int offset, Result result)</code> This method deprecated since API 8. If you want to get specific job info, please use <code>getJobInfoByJobSequence()</code> .
<code>static java.util.List<StatisticsJobData></code>	<code>getJobInfo(android.content.Context context, Result result)</code> This method deprecated since API 8. If you want to get all jobs list, please use <code>getAllJobsList()</code> .
<code>static StatisticsJobData</code>	<code>getLastJobInfo(android.content.Context context, Result result)</code> This method deprecated since API 8. If you want to get last job info, please use <code>getLastCompletedJobInfo()</code> .
<code>static int</code>	<code>getLastJobSequence(android.content.Context context, Result result)</code> This method deprecated since API 8. If you want to get last committed job sequence, please use <code>getLastCommittedJobSequence()</code> .
<code>void</code>	<code>onChange(int committedJobSequence)</code> This method deprecated since API 8. If you want to get completed job sequence number, please use <code>onComplete()</code> .

3 Statistics Sample Flow

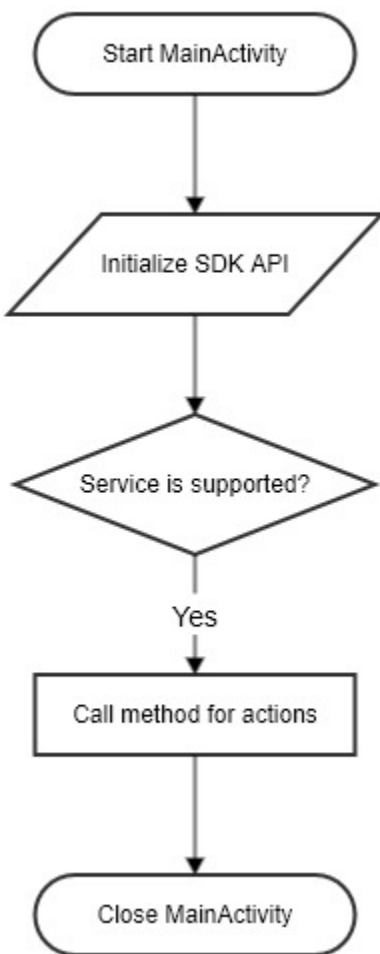

Flow of Statistics Sample

4 Create Statistics Agent

To enable Statistics Agent, HPK file has to include Statistics Agent information. HPKTool helps to create Statistics Agent as follows:

1. Open HPKTool.

HPK Tool (Version 1.6.3) - HPK spec 1.5.0 (Schema v2.6)

File Actions Help

This page is for updating HPK

Install File: StatisticsSample.apk [Select File]

UUID: 11111111-1111-1111-8888-111111111111 [Generate]

Name: StatisticsSample Sample

Vendor Name: HP

Platform version: 31.9 [Refresh]

Date: 20251111

Default Config: Default Configuration (Optional) [Select File] [Clear]

AuthAgent: AuthAgent Name [Add] [Delete]

Authorization: Authorization Name [Add] [Delete]

Home Screen App: ☐ Use Home Screen mode ☐ Set as default

Accessory: [Add Table]


Type	Vendor ID (Decimal)	Product ID (Decimal)
No Accessory		

Webservice: Webservice Name [Add] [Delete] [Add Table]

Met	Category	Absolute Path	Auth
-----	----------	---------------	------

The dialog to create HPK file

2. Click **Add**, then fill Statistics Agent details.

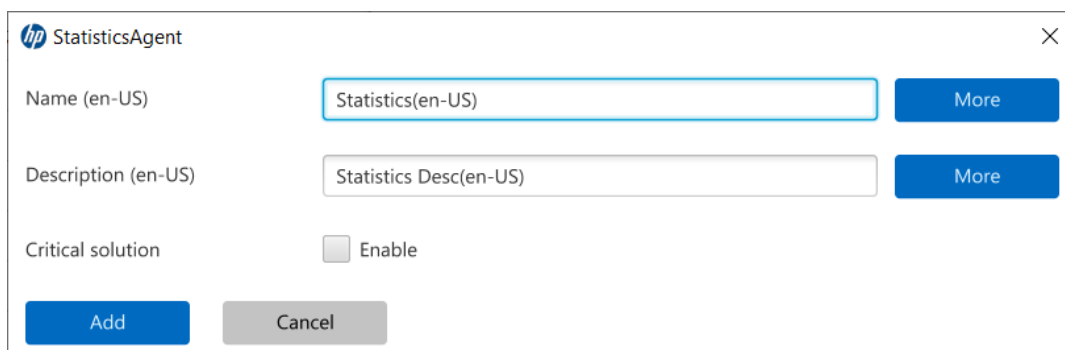

hp StatisticsAgent

Name (en-US) [More](#)

Description (en-US) [More](#)

Critical solution ☐ Enable

[Add](#) [Cancel](#)

An example for creating a Statistics Agent

Fields		Options	Description
Statistics Agent	Name	Required	Name of StatisticsAgent that will be shown on sign-in method lists. Default is English and multi-language is supported.
	Description	Required	Description of StatisticsAgent. Default is English and multi-language is supported.
	Critical solution	Optional	This prevents the device from overwriting old entries in the job buffer(default 256 jobs) of an agent until the solution has acknowledged processing that entry.

Details of Statistics Agent

3. Install **HPK file** on a device

5 Add permission in manifest

Application must add SDK permission to access new service of the SDK. This shows how to add it for the access of StatisticsService.

```
1.<?xml version="1.0" encoding="utf-8"?>
2.<manifest xmlns:android="http://schemas.android.com/apk/res/android"
package="com.hp.workpath.sample.statisticsample">
3.<uses-permission android:name="com.hp.workpath.permission.sdk.ACCESS_STATISTICS_PERMISSION" />
```

6 Initializing SDK

Application requires to initialize the SDK services when starts with an activity for accessing the SDK services. The `com.hp.workpath.api.Workpath` includes `initialize()` method for this.

The sample shows how to initialize SDK.

1. Call `initialize()` method of Workpath SDK on resume event and clear it on pause event. It is for calling initialization when an activity is switched. Refer to MainActivity.
2. Make a task and call `initialize()` method with catching exceptions. If Workpath SDK is not initialized, sdk exception or security exception will be thrown. Refer to InitializationTask.java.

Initialization call in Activity Resume

```

1. @Override protected void onResume() {
2.     super.onResume();
3.     mInitializationTask = new InitializationTask(this);
4.     mInitializationTask.taskExecute();
5.
6.     statisticObserver.register(getApplicationContext());
7. }
8.
9. @Override protected void onPause() {
10.    super.onPause();
11.
12.    mInitializationTask.cancel();
13.    mInitializationTask = null;
14.
15.    statisticObserver.unregister(getApplicationContext());
16.
17.    if (mAlertDialog != null) {
18.        mAlertDialog.dismiss();
19.        mAlertDialog = null;
20.    }
21.
22.    if (mSnackBar != null) {
23.        mSnackBar.dismiss();
24.        mSnackBar = null;
25.    }
26. }
```

Exception handling by InitializationTask.java

7 Checking StatisticsService Capability

The `isSupported()` method returns whether the `StatisticsService` is supported. Refer to `InitializationTask.java`.

```
1. // Check if StatisticsService is supported
2. if (!StatisticsService.isSupported(mContextRef.get())) {
3.     // StatisticsService is not supported on this device
4.     status = InitStatus.NOT_SUPPORTED;
5. }
```

Available service check by `isSupported()`

8 Retrieve Statistics information from a device

StatisticsService provides `getJobInfoByJobSequence()` method for retrieving statistics information from current sequence of an agent to specific job of sequence number on a device and `getAllJobsList()` provides all jobs of Statistics (maximum job count is 256 per each agent).

The code snippet shows example of such queries :

```

1. public void run() {
2.     Integer jobSequence = null;
3.     if (args.length == 1) {
4.         jobSequence = args[0];
5.     }
6.
7.     try {
8.         if (jobSequence == null) {
9.             onPostExecute(StatisticsService.getAllJobsList(mContextRef.get(), mResult));
10.        } else {
11.            List<StatisticsJobData> jobDataList = new ArrayList<>();
12.            jobDataList.add(StatisticsService.getJobInfoByJobSequence(mContextRef.get(),
jobSequence, mResult));
13.            onPostExecute(jobDataList);
14.        }
15.    } catch (Throwable t) {
16.        Logger.showResult(null, "StatisticsService.getJobInfoByJobSequence " + t.getMessage());
17.        executor.shutdown();
18.        onPostExecute(null);
19.    }
20.
21. }

```

Retrieve Statistics from a device in JobInfoTask.java

9 Get last job information of an agent

StatisticsService agents can retrieve jobs from agent's completed job sequence number.

Job Sequence of an agent is created and initialized after installation, then it could be updated by `commit()` method. StatisticsService provides `getLastCompletedJobInfo()` method to retrieve last committed job sequence.

The code snippet shows example of such queries :

```
1. public void run() {
2.     try {
3.         onPostExecute(StatisticsService.commit(mContextRef.get(), mCommit, mResult));
4.     } catch (Throwable t) {
5.         Logger.showResult(null, "StatisticsService.commit " + t.getMessage());
6.         executor.shutdown();
7.         onPostExecute(false);
8.     }
9. }
```

Updating job sequence of an agent in CommitTask.java

```
1. public void run() {
2.     try {
3.         List<StatisticsJobData> jobDataList = new ArrayList<>();
4.         jobDataList.add(StatisticsService.getLastCompletedJobInfo(mContextRef.get(), mResult));
5.         onPostExecute(jobDataList);
6.     } catch (Throwable t) {
7.         Logger.showResult(null, "StatisticsService.getLastJobInfo " + t.getMessage());
8.         executor.shutdown();
9.         onPostExecute(null);
10.    }
11. }
```

Retrieve last job information of an agent in LastJobInfoTask.java

10 Getting notification by Job event

Callbacks for Statistics agent are received job event through `StatisticsService.AbstractStatisticsNotificationObserver`. Statistics Sample extends this class to obtain callbacks and the completed job sequence of an agent. Registration and unregistration of the observer are done by `OnResume()` / `OnPause()` respectively.

`StatisticObserver.java` contains `StatisticObserver` implementation:

```
1. public class StatisticObserver extends StatisticsService.AbstractStatisticsNotificationObserver {
2.
3.     private ObserverInterface observerInterface;
4.
5.     public StatisticObserver(Handler handler, ObserverInterface observerInterface) {
6.         super(handler);
7.         this.observerInterface = observerInterface;
8.     }
9.
10.    public interface ObserverInterface {
11.        void onComplete(int jobSequence);
12.    }
13.
14.    @Override public void onComplete(int jobSequence) {
15.        observerInterface.onComplete(jobSequence);
16.    }
17. }
```

Getting notification event of an agent

11 Legal notice

The information contained in this documentation is subject to change without notice.

HP Inc. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. HP Inc. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this documentation may be transformed, reproduced, or translated to another language without prior.

© Copyright 2018 HP Development Company, L.P.

12 Support

The HP Solution Business Program (SBP) support staff has established a procedure for submitting technical problems to the Incident Call Center (ICC). All SBP members must be registered with the Solution Programs Portal (SPP) to access technical support and other feedback or reporting activities.

Log on to the portal at <<http://www.hp.com/go/solutions>> to submit your issue to technical support. After you submit the issue, a report will be generated for the Incident Call Center. A Technical Support representative will be assigned to validate the incident and to work on a fix. HP will contact you for further information regarding the incident as quickly as possible.