



Workpath SDK Supplies Sample Overview

Product Group: HP Workpath SDK

Version: 1.6.3

Revised: November 11, 2025

HP Inc.
11311 Chinden Blvd.
Boise, ID 83714 USA

HP Confidential

Table of Contents

1 Introduction 3

1.1 Document conventions3

2 Supplies Sample on a device..... 4

2.1 Supplies Details.....5

3 Supplies Sample Flow 6

4 Add permission in manifest 7

5 Initializing SDK..... 8

6 Checking SuppliesService Capability 10

7 Retrieve supplies from a device 11

8 Legal notice 12

9 Support..... 13

1 Introduction

Supplies Sample provides use case scenario how to read supplies information on a device using SuppliesService of the HP Workpath SDK API.


1.1 Document conventions

The following conventions are used throughout this document to define, describe, and discuss the API: function prototypes, data structure definitions, enumerated constants.


- **Name** – Bold signifies item names such as button names and menu items.
- <name> – Angle brackets mark URLs.
- {value} – Curly braces represent values to be replaced.
- Identifiers for defined constants use all UPPERCASE letters.
- *Name* – Italicized type refers to formal function parameters, data structure types and fields, and other defined or enumerated types in the text body (for example, *streamtype*).
- Numbers are in decimal format unless otherwise noted.
- `Name` - Monospaced type is used for code fragments, function prototypes and data type definitions.
- Function names are usually accompanied by parentheses (for example, `function()`).

2 Supplies Sample on a device

Supplies Sample shows the code and the usage of example how to use SuppliesService on a device.

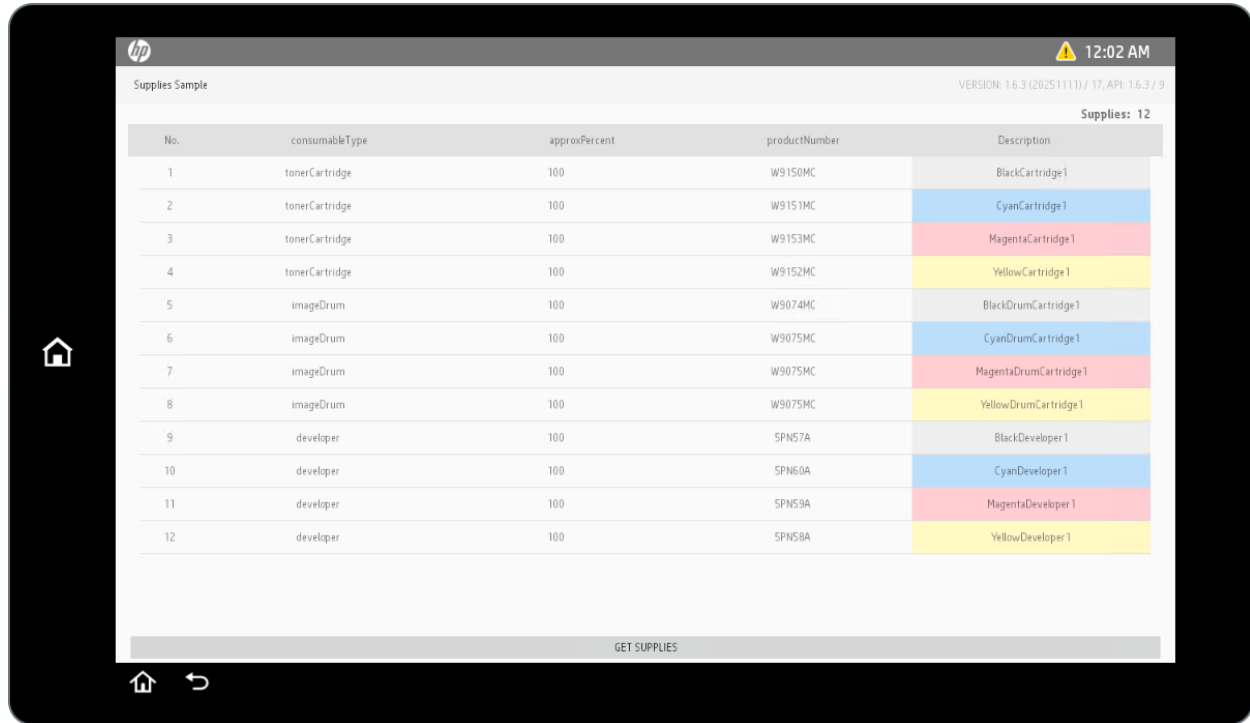

A main activity of Supplies Sample

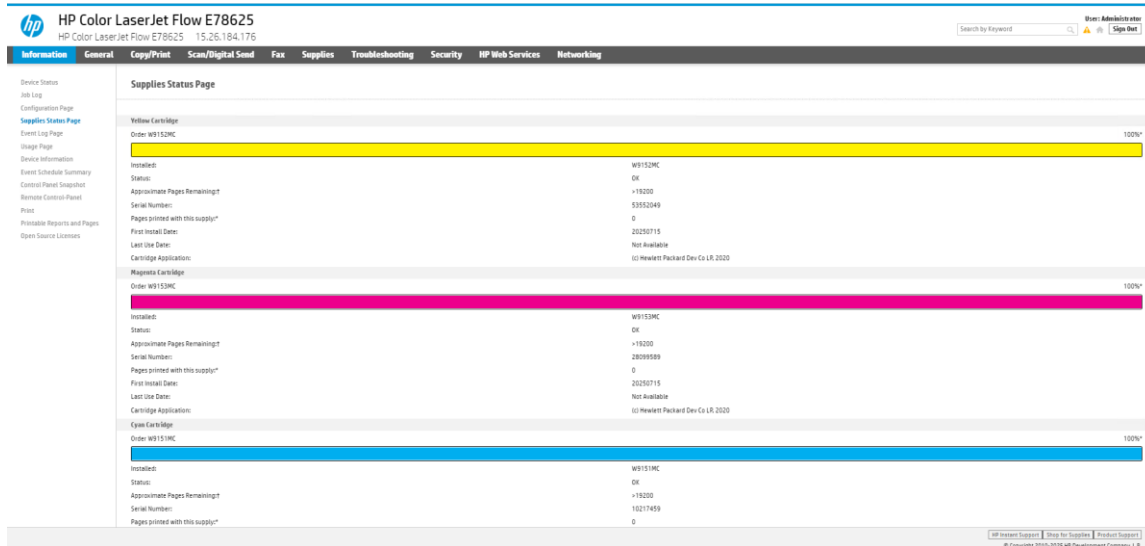


Supplies status page in EWS


2.1 Supplies Details

The information of supplies is provided through the selected 9 items as below:

Items	Description
ConsumableTypeEnum	This information represents the type of this supply. For example, Toner, Image Drum
Description	This information represents the description of this supply. For example, Black Cartridge
MarkerColor	This information represents the color of this supply if the supply has color information. For example, Yellow, Cyan, Magenta, Black
ApproxPercentRemaining	This information represents the approximate remaining percentage of this supply. The unit is a percent.
MakeAndModel	This information represents the brand name and model name of the system which includes this supply.
ProductNumber	This information represents the product number of this supply.
SerialNumber	This information represents the serial number of this supply.
MaxCapacity	This information represents the maximum capacity of this supply expressed in capacity unit.
Unit	This information represents the unit of maximum capacity of this supply.

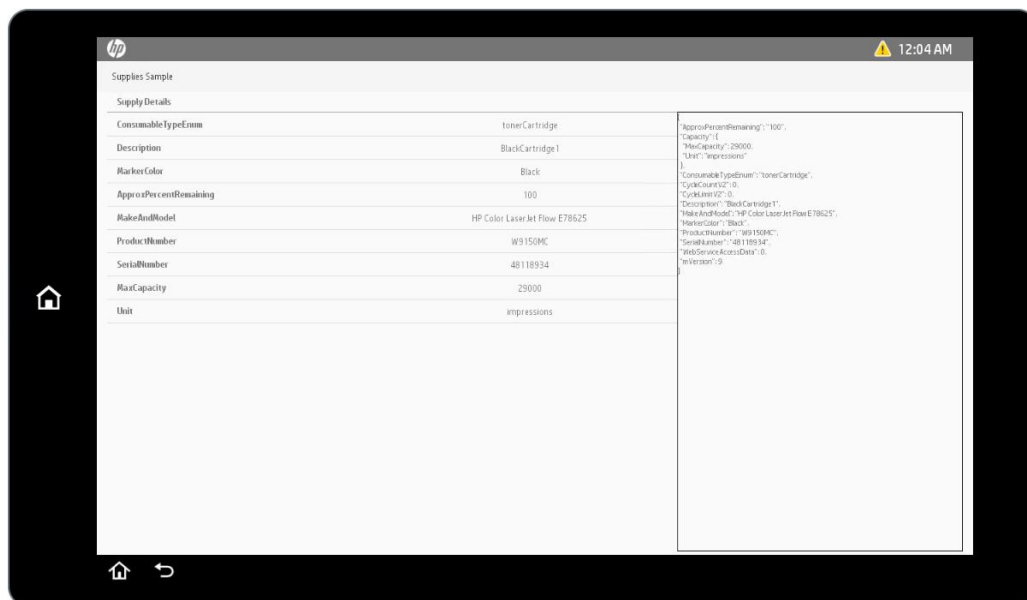

3 Supplies Sample Flow

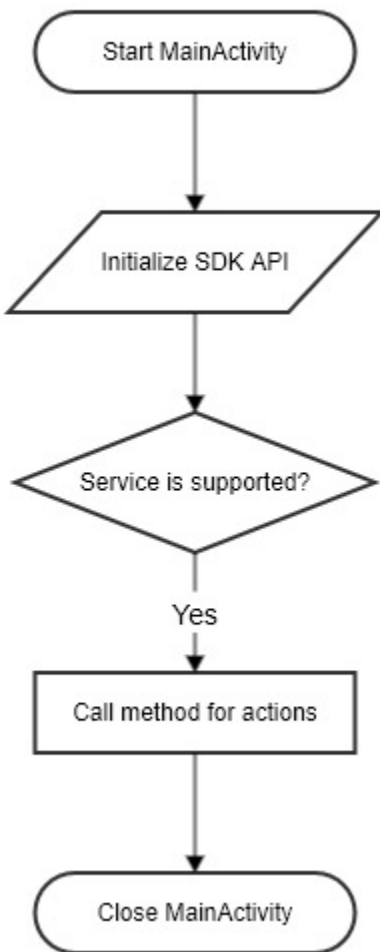

Flow of Supplies Sample

4 Add permission in manifest

Application must add SDK permission to access new service of the SDK. This shows how to add it for the access of SuppliesService.

```
1. <?xml version="1.0" encoding="utf-8"?>
2. <manifest xmlns:android="http://schemas.android.com/apk/res/android"
   package="com.hp.workpath.sample.suppliessample">
3. <uses-permission android:name="com.hp.workpath.permission.sdk.ACCESS_SUPPLIES_PERMISSION" />
```

5 Initializing SDK

Application requires to initialize the SDK services when starts with an activity for accessing the SDK services. The `com.hp.workpath.api.Workpath` includes `initialize()` method for this.

The sample shows how to initialize SDK.

1. Call `initialize()` method of Workpath SDK on resume event and clear it on pause event. It is for calling initialization when an activity is switched. Refer to `MainActivity.java`.

```
1. @Override
2.     protected void onResume() {
3.         super.onResume();
4.         replaceFragment(mSuppliesListFragment);
5.         mInitializationTask = new InitializationTask(this);
6.         mInitializationTask.execute();
7.     }
8.     @Override
9.     protected void onPause() {
10.        super.onPause();
11.        mInitializationTask.cancel(true);
12.        mInitializationTask = null;
13.        if (mAlertDialog != null) {
14.            mAlertDialog.dismiss();
15.            mAlertDialog = null;
16.        }
17.    }
```

Initialization call in Activity Resume

2. Make a task and call `initialize()` method with catching exceptions. If Workpath SDK is not initialized, sdk exception or security exception will be thrown. Refer to `InitializationTask.java`.

```

1. @Override
2.     protected InitStatus doInBackground(final Void... params) {
3.         InitStatus status = InitStatus.NO_ERROR;
4.         try {
5.             // initialize Workpath SDK
6.             Workpath.getInstance().initialize(mContextRef.get());
7.             // Check if SuppliesService is supported
8.             if (!SuppliesService.isSupported(mContextRef.get())) {
9.                 // SuppliesService is not supported on this device
10.                status = InitStatus.NOT_SUPPORTED;
11.            }
12.        } catch (SdkUnsupportedException sue) {
13.            mThrowable = sue;
14.            status = InitStatus.INIT_EXCEPTION;
15.        } catch (SecurityException se) {
16.            mThrowable = se;
17.            status = InitStatus.INIT_EXCEPTION;
18.        } catch (Throwable t) {
19.            mThrowable = t;
20.            status = InitStatus.INIT_EXCEPTION;
21.        }
22.        return status;
23.    }

```

Exception handling by `InitializationTask.java`

6 Checking SuppliesService Capability

The `isSupported()` method returns whether the SuppliesService is supported. Refer to `InitializationTask.java`.

```
1.          // Check if SuppliesService is supported
2.          if (!SuppliesService.isSupported(mContextRef.get())) {
3.              // SuppliesService is not supported on this device
4.              status = InitStatus.NOT_SUPPORTED;
5.          }
```

Available service check by `isSupported()`

7 Retrieve supplies from a device

SuppliesService provides methods for retrieving supplies on a device.

The code snippet shows example of such queries :

```
1. @Override
2.     protected List<Supply> doInBackground(Void... voids) {
3.         try {
4.             return SuppliesService.getSuppliesInfo(mContextRef.get(), mResult);
5.         } catch (Throwable t) {
6.             mThrowable = t;
7.         }
8.         return null;
9.     }
```

Retrieve supplies from a device in SuppliesTask.java

8 Legal notice

The information contained in this documentation is subject to change without notice.

HP Inc. makes no warranty of any kind with regard to this material, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose. HP Inc. shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this documentation may be transformed, reproduced, or translated to another language without prior.

© Copyright 2018 HP Development Company, L.P.

9 Support

The HP Solution Business Program (SBP) support staff has established a procedure for submitting technical problems to the Incident Call Center (ICC). All SBP members must be registered with the Solution Programs Portal (SPP) to access technical support and other feedback or reporting activities.

Log on to the portal at <<http://www.hp.com/go/solutions>> to submit your issue to technical support. After you submit the issue, a report will be generated for the Incident Call Center. A Technical Support representative will be assigned to validate the incident and to work on a fix. HP will contact you for further information regarding the incident as quickly as possible.