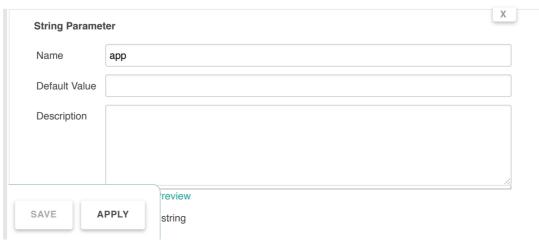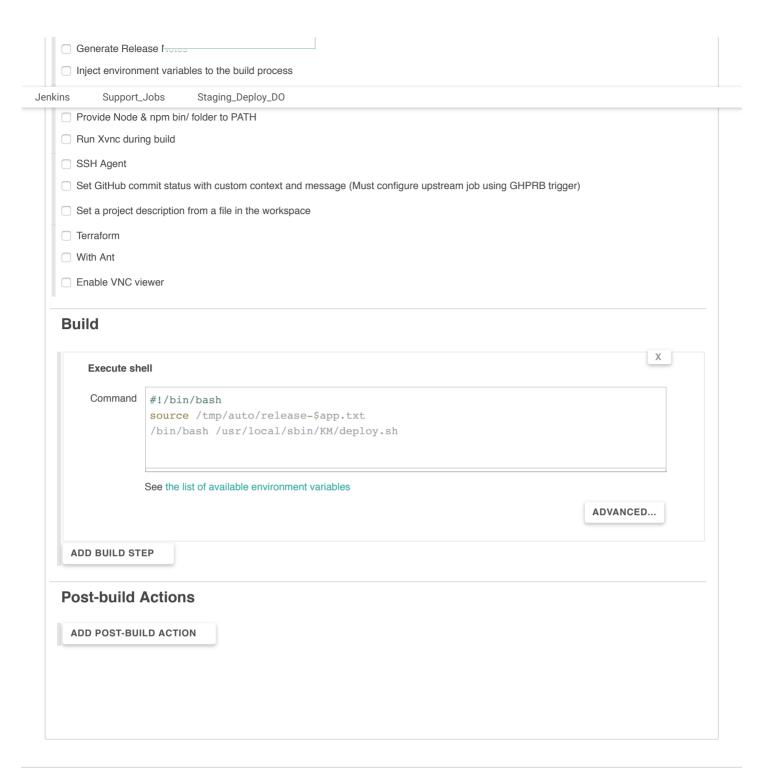Jenkins      Support_Jobs      Staging_Deploy_DO

| General | GitBucket | Source Code Management | Build Triggers | Build Environment | Build | Post-build Actions |

Description
Deploy Job for all applications on staging server

[Plain text] Preview

☐ Commit agent's Docker container

☐ Run the build inside Docker containers

☐ Define a Docker template

☑ Discard old builds

Strategy     Log Rotation                                          ⬍

Days to keep builds

if not empty, build records are only kept up to this number of days

Max # of builds to keep     40

if not empty, only up to this number of build records are kept

**ADVANCED...**

☐ Do not Scan failed builds

## GitBucket

URL

☐ Enable hyperlink to the issue

☐ GitHub project

☐ Disable Automated Maven Repository Cleanup

☐ Permission to Copy Artifact

☐ Promote builds when...

Rebuild options:     ☐ Rebuild Without Asking For Parameters

☐ Disable Rebuilding for this job

☑ This project is parameterised

X

**String Parameter**

Name          app

Default Value

Description

Preview

| SAVE | APPLY |     string

ADD PARAMETER

☐ Throttle builds

☐ Prepare an environment for the run

☐ Disable this project

☐ Execute concurrent builds if necessary

JDK     (System)  ⬍

JDK to be used for this project

ADVANCED...

## Source Code Management

● None

○ AWS CodePipeline

○ Git

○ Mercurial

○ Subversion

## Build Triggers

☐ Trigger builds remotely (e.g., from scripts)

☐ Build after other projects are built

☐ Build periodically

☐ Build when a change is pushed to BitBucket

☐ Build when a change is pushed to GitBucket

☐ Build when another project is promoted

☐ GitHub Branches

☐ GitHub Pull Request Builder

☐ GitHub Pull Requests

☐ GitHub hook trigger for GITScm polling

☐ Poll SCM

## Build Environment

☐ Start Xvfb before the build, and shut it down after.

☐ Delete workspace before build starts

☐ Use secret text(s) or file(s)

☐ Provide Configuration files

☐ Send files or execute commands over SSH before the build starts

☐ Send files or execute commands over SSH after the build runs

☐ Abort the build if it's stuck

☑ Add timestamps to the Console Output

☐ Color ANSI Console Output

☐ Configure release build

☐ Create a MySQL database for the job

☐ Create a formatted

☐ Execute shell script

SAVE     APPLY

☐ Generate Release Notes

☐ Inject environment variables to the build process

☐ Provide Node & npm bin/ folder to PATH

☐ Run Xvnc during build

☐ SSH Agent

☐ Set GitHub commit status with custom context and message (Must configure upstream job using GHPRB trigger)

☐ Set a project description from a file in the workspace

☐ Terraform

☐ With Ant

☐ Enable VNC viewer

## Build

X

**Execute shell**

Command

```
#!/bin/bash
source /tmp/auto/release-$app.txt
/bin/bash /usr/local/sbin/KM/deploy.sh
```

See the list of available environment variables

ADVANCED...

ADD BUILD STEP

## Post-build Actions

ADD POST-BUILD ACTION

SAVE     APPLY