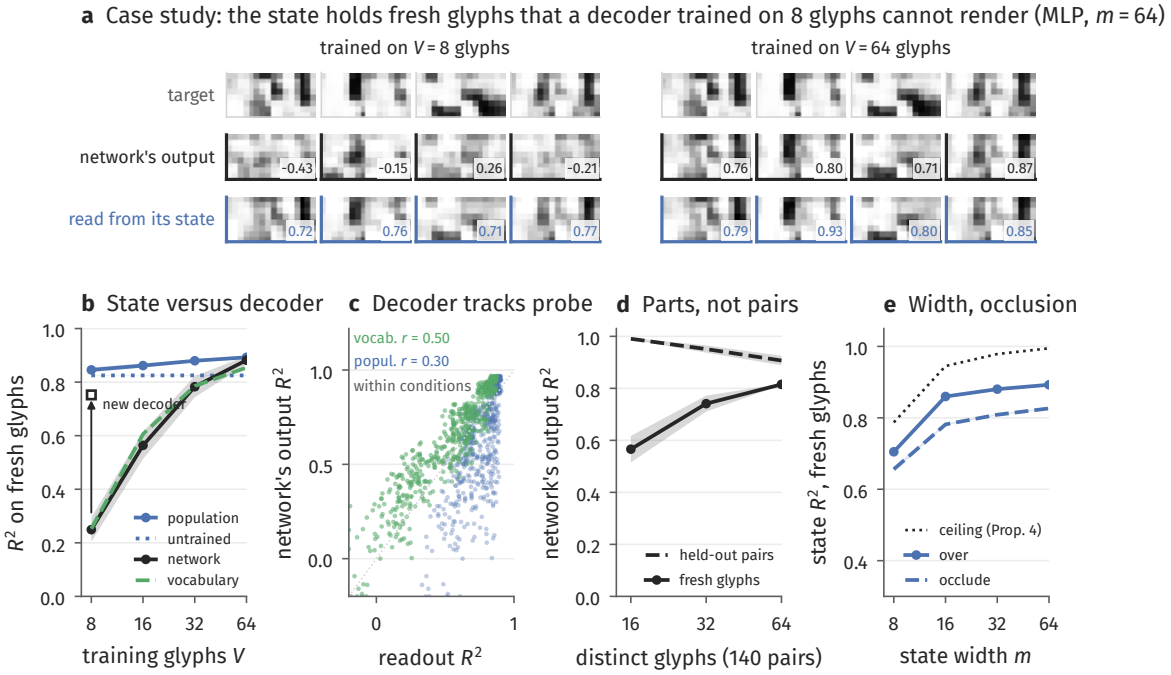

a Case study: the state holds fresh glyphs that a decoder trained on 8 glyphs cannot render (MLP, m = 64)
trained on V = 8 glyphs
trained on V = 64 glyphs
target
network's output
read from its state
-0.43
-0.15
0.26
-0.21
0.72
0.76
0.71
0.77
0.76
0.80
0.71
0.87
0.79
0.93
0.80
0.85
b State versus decoder
R² on fresh glyphs
new decoder
population
untrained
network
vocabulary
training glyphs V
c Decoder tracks probe
vocab. r = 0.50
popul. r = 0.30
within conditions
network's output R²
readout R²
d Parts, not pairs
network's output R²
held-out pairs
fresh glyphs
distinct glyphs (140 pairs)
e Width, occlusion
state R², fresh glyphs
ceiling (Prop. 4)
over
occlude
state width m