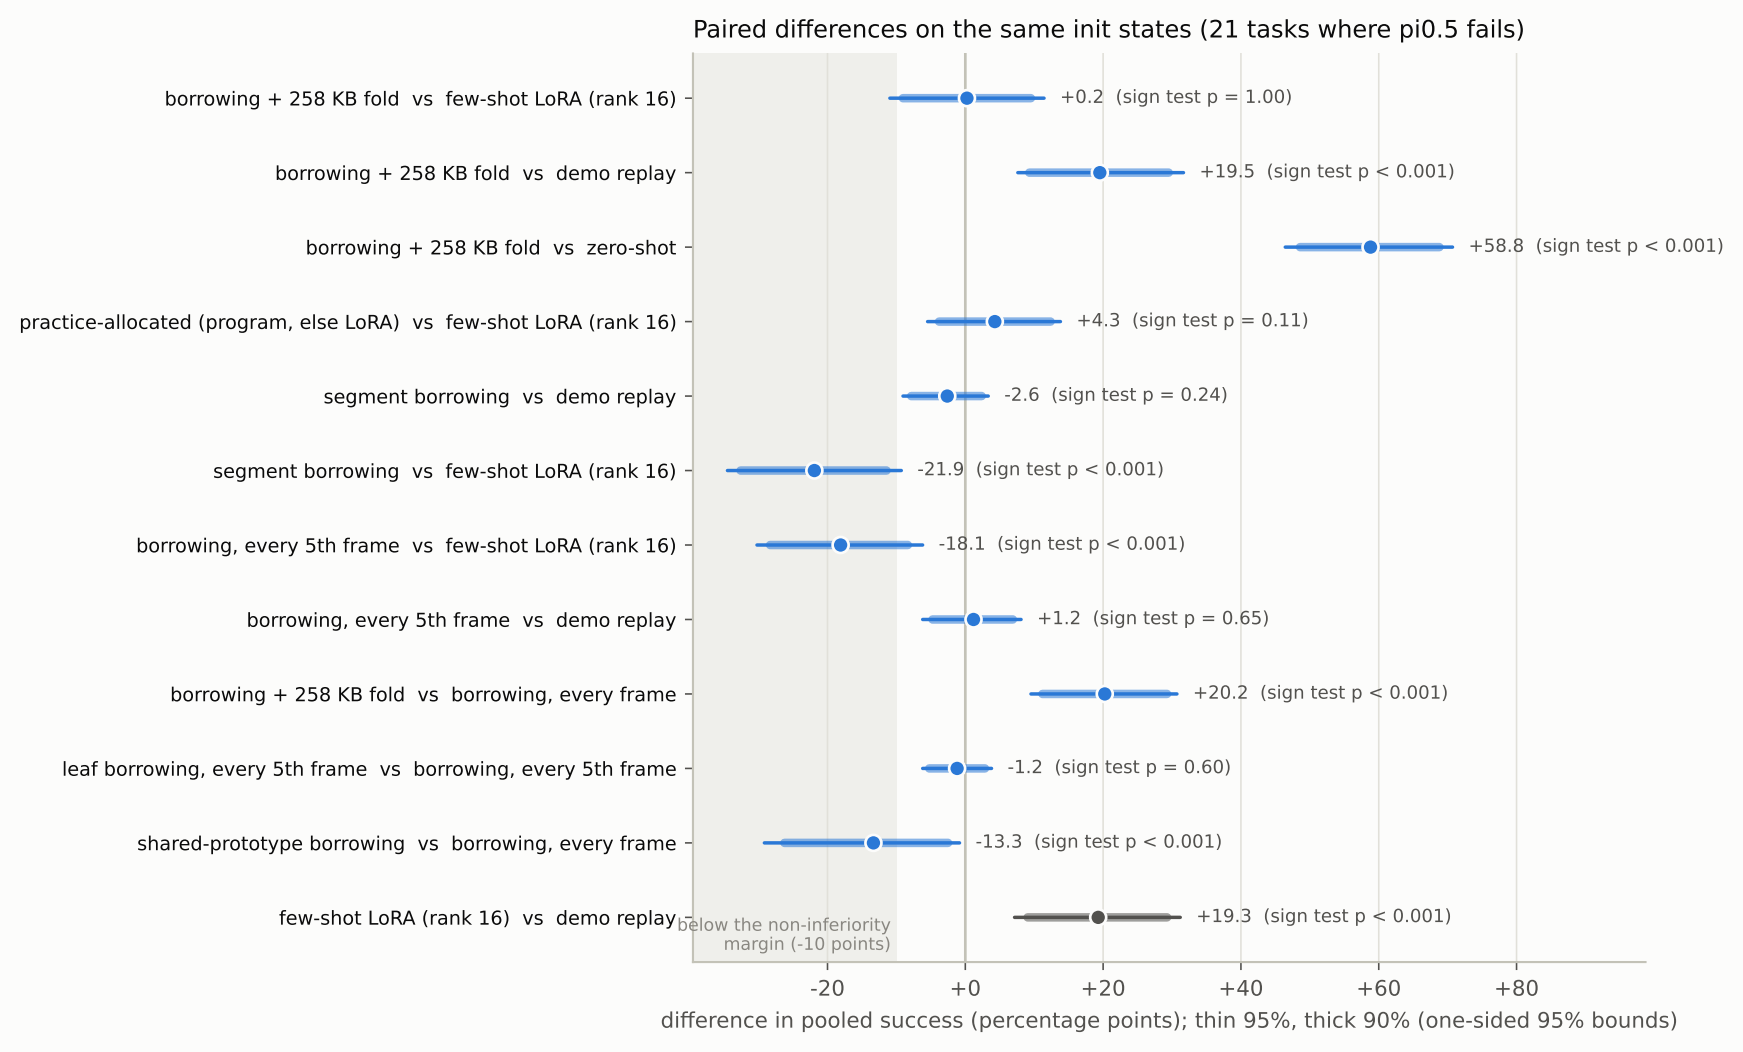
Paired differences on the same init states (21 tasks where pi0.5 fails)
borrowing + 258 KB fold vs few-shot LoRA (rank 16)
+0.2 (sign test p = 1.00)
borrowing + 258 KB fold vs demo replay
+19.5 (sign test p < 0.001)
borrowing + 258 KB fold vs zero-shot
+58.8 (sign test p < 0.001)
practice-allocated (program, else LoRA) vs few-shot LoRA (rank 16)
+4.3 (sign test p = 0.11)
segment borrowing vs demo replay
-2.6 (sign test p = 0.24)
segment borrowing vs few-shot LoRA (rank 16)
-21.9 (sign test p < 0.001)
borrowing, every 5th frame vs few-shot LoRA (rank 16)
-18.1 (sign test p < 0.001)
borrowing, every 5th frame vs demo replay
+1.2 (sign test p = 0.65)
borrowing + 258 KB fold vs borrowing, every frame
+20.2 (sign test p < 0.001)
leaf borrowing, every 5th frame vs borrowing, every 5th frame
-1.2 (sign test p = 0.60)
shared-prototype borrowing vs borrowing, every frame
-13.3 (sign test p < 0.001)
few-shot LoRA (rank 16) vs demo replay
+19.3 (sign test p < 0.001)
below the non-inferiority margin (-10 points)
-20
+0
+20
+40
+60
+80
difference in pooled success (percentage points); thin 95%, thick 90% (one-sided 95% bounds)