# **EXPERIMENT-10**

**Karthik KS** 

RMCA-B


Roll No:06

create view view1 as selct order\_no,order\_date FROM salesorder;


#### - Options



2. desc view1;

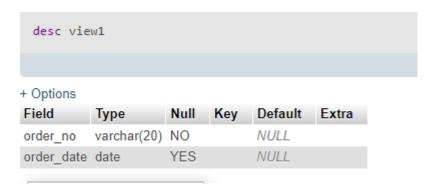

### SELECT \* from view1;

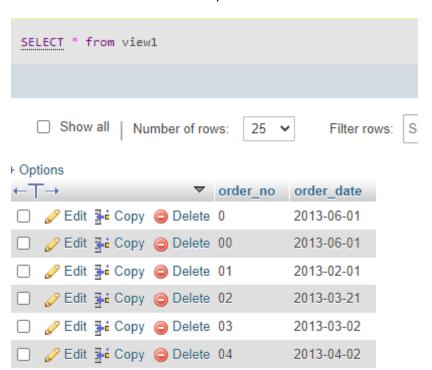

4. insert into view1 values('05','2013-08-08');

5.create view view2 as select client\_no,cname from clientmaster;




- INSERT INTO view2 VALUES(106, 'vidhya');
- 7. create view view3 as select salesman\_number,sname,city FROM salesmaster WHERE city="mumbai";



8. create view view4 as SELECT cname, clientmaster.city as ccity, sname, sales master.city from sales master, clientmaster;



9. desc view4;

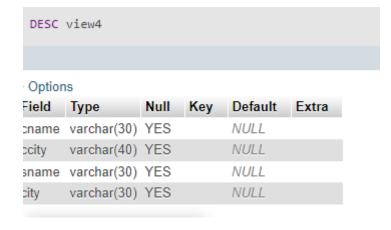


10. insert into view4 values('vidhya','idukki','prasad','idukki');

```
insert into view4 values('vidhya','idukki','prasad','idukki')


WySQL said: 

$1394 - Can not insert into join view 'sales.view4' without fields list
```

11. create view view5 as select cname, sname from view4;

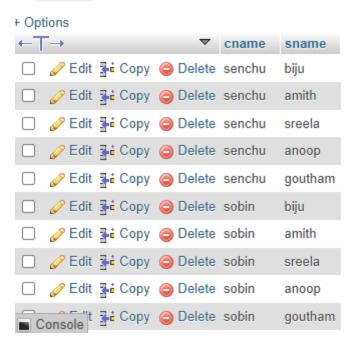

12. desc view5;

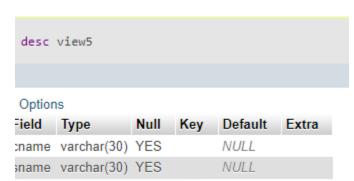

# 13. insert into view5 values('vidhya','prasad');

```
insert into view5 values('vidhya','prasad')

MySQL said: 
#1394 - Can not insert into join view 'sales.view5' without fields list
```

## 14. drop view view4;

Show query box

```
✓ MySQL returned an empty result set (i.e. zero rows). (Query took 0.0009 seconds.)

drop view view4
```

### 15. drop view view5;

Show query box

✓ MySQL returned an empty result set (i.e. zero rows). (Query took 0.0022 seconds.)
drop view view5