


What is DHCP Spoofing?

DHCP Spoofing is a type of **network attack** where an attacker sets up a **fake DHCP server** on the same network to **send forged DHCP responses** to clients. The goal is to **redirect victim traffic** through the attacker's machine (Man-in-the-Middle).

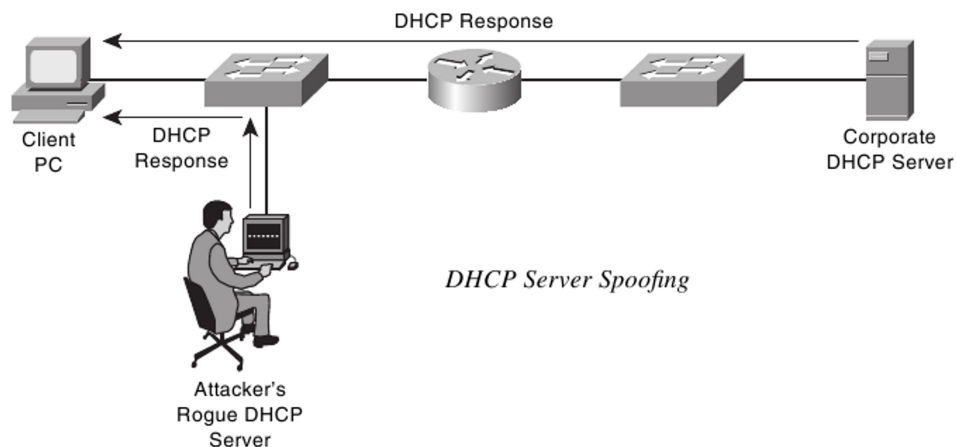

DHCP Basics (Recap)

- When a device joins a network, it sends a **DHCP Discover** message.
- The **DHCP server** responds with:
 - IP Address
 - Default Gateway
 - DNS Server
 - Subnet Mask

What Happens in DHCP Spoofing?

1. Victim sends a **DHCP Discover** broadcast.
2. **Attacker's rogue DHCP server** responds **faster** than the real server.
3. Victim accepts:
 - Attacker's **IP settings**
 - Attacker's **gateway** and **DNS**
4. Victim's traffic now flows **through the attacker** (MITM).

Attacker Can Then:

- Intercept traffic
- Redirect victim to **malicious websites**
- Capture sensitive data (credentials, sessions)
- Perform **DNS Spoofing**, phishing, etc.

Example Use Case in Pen Testing

- You spoof DHCP and give:
 - Gateway: your Kali IP

- DNS: your Kali IP
- Then use Bettercap or Ettercap to sniff, inject, or redirect traffic.



Tools for DHCP Spoofing in Kali:

1. Bettercap

`sudo bettercap -iface eth0`

Then inside bettercap:

`net.recon on`

`net.probe on`

`dhcp.spoof on`

You can configure custom gateway, DNS:

`set dhcp.spoof.dns 192.168.1.100`