

USER GUIDE

Database Monitor exa

Monitoring Oracle databases from a single dashboard

Product	Database Monitor exa
Release / build	DB16.52_Monitor_exa
Intended users	Database administrators and operations staff
Document date	5 October 2026

Contents

- 1 Overview
- 2 Before you start
- 3 Starting and stopping the application
- 4 Screen layout
- 5 Loading your databases
- 6 The home page
- 7 The database dashboard
- 8 Working with sessions
- 9 Archive log cleanup
- 10 ASM disk groups
- 11 Email alert settings
- 12 Status colours and thresholds
- 13 Frequently asked questions and troubleshooting

About the figures

This guide uses labeled diagrams to show how screens are organized and how actions flow, rather than screenshots of the running application — treat each figure as a map of what you'll see, not a pixel-exact reproduction.

1. Overview

Database Monitor exa gives you a live view of all your Oracle databases and their host servers in one browser window.

With it you can:

- See at a glance which databases are up, down or need attention.
- Check tablespace, memory, archive log and backup status for any database.
- Find the sessions using the most CPU or memory, see what SQL they are running, and kill a session if needed.
- Detect blocking locks.
- Check Standby (Data Guard) synchronisation and Reporting database availability.
- Watch disk space (mount points), Oracle processes, and ASM disk group usage on each server.
- Clean up old archive logs safely using RMAN.
- Receive email alerts through Microsoft 365 or SMTP.

2. Before you start

You need:

- A Windows PC with the **Microsoft Visual C++ Redistributable (x64)** installed (the installer is supplied with the application, under prerequisites/).
- The application folder DB16.52_Monitor_exa copied to your PC.
- Network access from your PC to the database servers — port 1521 for the database, port 22 for SSH.
- A configuration file listing your databases and their credentials (section 5).
- Optional: Microsoft 365 application details from your administrator, if you want email alerts.

Keep the configuration file safe

The configuration file contains database and server passwords in plain text. Store it somewhere protected and never send it by email or chat.

3. Starting and stopping the application

3.1 Start

- 1 Open the folder `DB16.52_Monitor_exa` and double-click `DB16.52_Monitor_exa.exe` .
- 2 A console window opens `Starting Database` followed by its loading steps. Leave this `is` the and prints `Monitor...` window open — it `server`.
- 3 Within about 30 seconds your default browser `http://127.0.0.1:5001` . If it doesn't, open that opens the dashboard at `address manually`.

Only one copy at a time

If the console instead prints `[CRITICAL ERROR] Port 5001 is already in use by another instance or service.`, the application is already running — use the existing browser tab, or close the other console window first and press Enter to exit this one.


3.2 Stop

Any of the following stops the application cleanly — every Oracle connection pool and SSH session is closed first:

- Click **Disconnect** (top-right of the home page) and confirm.
- Close the browser tab — the server detects this and stops within a few seconds.
- Close the console window, or press Ctrl+C in it.

A plain browser **refresh does not stop the server** — but it does clear your loaded databases; see section 5.4.

4. Screen layout

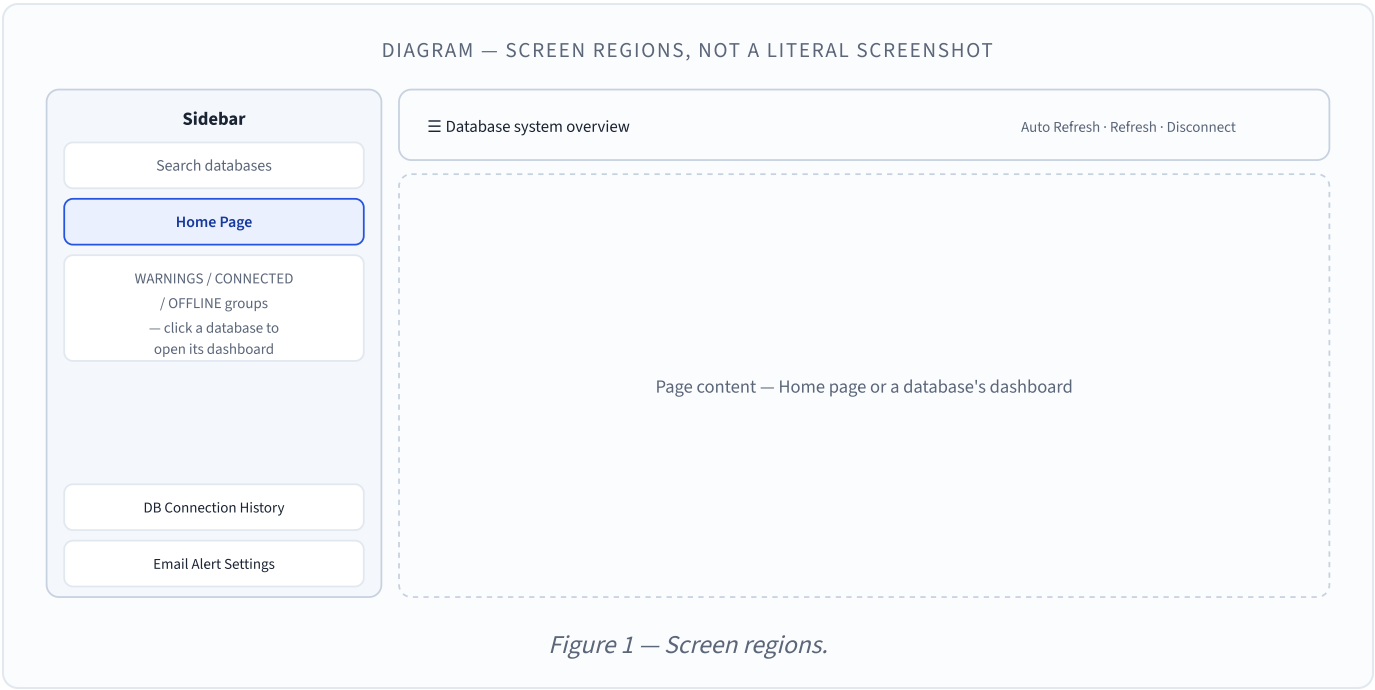

AREA	WHAT IT DOES
Sidebar search	Filters the database list and home-page cards as you type a name, host or service.
Sidebar list	Home Page, then databases grouped as Warnings, Connected and Offline. Click a database to open its dashboard.
DB Connection History	Previously uploaded configuration files this session (section 5.3).
Email Alert Settings	Opens the email configuration page (section 11).
≡ menu	Shows or hides the sidebar.
Auto Refresh	Enter a delay and tick the box — it refreshes once after that delay, then unticks itself automatically. It is not a repeating timer, even though it looks like one.
Refresh	Reloads the current page's data immediately, without clearing your configuration.
Disconnect	Stops the application (home page only).

5. Loading your databases

5.1 Prepare the configuration file

Create a `.csv` or `.txt` file with one line per database. The application accepts three line formats and figures out which one you used automatically — the simplest is comma- or space-separated positional values, 6 required leading fields:

POSITION	VALUE	REQUIRED
1–6	DB ID, host, port, service name, DB username, DB password	Yes
7–8	Server (SSH) username and password — needed for mount points, processes and archive cleanup	Recommended
9–16	Reporting DB: ID, host, port, service name, username, password (+2 more) — or write N/C at position 9 to skip Reporting entirely	Optional
trailing	Grid/ASM OS username — leave blank to use the default account name <code>grid</code>	Optional

```
# DB_id host          port service user pwd          host_user host_pwd RDB_id host
PROddb1 192.168.10.21 1521 proddb1 sys  ***** oracle  ***** REPDB1 192.168.10.31
HRDB    192.168.10.21 1521 hrdb   sys  ***** oracle  *****
FINDB,192.168.10.22,1521,findb,sys,*****,oracle,*****
```

If a line has fewer than the six required values, the upload is rejected with a message naming exactly what's missing and the line number. Fix the line, or comment it out with a leading `#`, and upload again.

5.2 Upload the file

- 1 On the home page, find **Import databases configuration**.
- 2 Drag your file onto the dashed area, or click **Browse** and select it.
- 3 A confirmation message reports how many databases are now active. Checking... for a few seconds while Each appears in the sidebar and as a card, showing it's first contacted.

Refreshing the browser clears the configuration

Every time the home page loads — not just the first time — the loaded databases and upload history are cleared, by design. Re-upload your file after any browser refresh (F5). Use the in-page **Refresh** button instead of a browser refresh to update data without losing your configuration.

5.3 DB Connection History

Open **DB Connection History** at the bottom of the sidebar to see files uploaded so far this session. The active file is marked **Active**.

- **Restore** — switch back to an earlier file.
- **Delete** — remove an entry (confirmation required). Deleting the active file promotes the next most recent one.

6. The home page

6.1 Overview counters

The top panel shows the total number of **Databases**, how many are **Connected**, and how many are **Disconnected**.

6.2 Connections (database cards)

FIELD	MEANING
DB Status / Listener Status	Up (green) or down (red) — the listener check is a TCP port probe, not <code>lsnrctl</code> , and reads "Running" automatically whenever the database itself is reachable.
Uptime, Active Users	Time since instance start; active session count.
Backup	Completed (green) only when the last RMAN backup succeeded <i>and</i> a backup ran yesterday; otherwise Pending (amber).
Tablespace	Lists any tablespace at or above 90% in red.
Standby	Synced, Not Synced (with the worst log gap), DOWN, or Not Configured.
Reporting	UP, DOWN, or Not Configured.

Warning boxes at the bottom of a card explain specific problems — critical mount points, a lock/deadlock warning, a backup warning, or a critical tablespace. A connection error (e.g. a timeout) appears as red text. Cards refresh automatically from the server's 25-second background cache.

Use the controls above the cards to focus the view: **All Databases**, **Filter** (Healthy / Warning / Critical), or **History** (your five most recently opened databases).

6.3 Server mount points


One table per server shows every file system's size, used and available space, and usage percentage — databases sharing a host appear together under one table. A red box such as "Connection Failed" means SSH couldn't reach that server.

6.4 Oracle server processes

Shows the Oracle processes using the most CPU on each server, with a Running or Down indicator per host.

7. The database dashboard

Click a database in the sidebar (or its card) to open its dashboard — a green/red **Database Up** and **Listener Running** indicator sits in the header. Click Home Page to return.

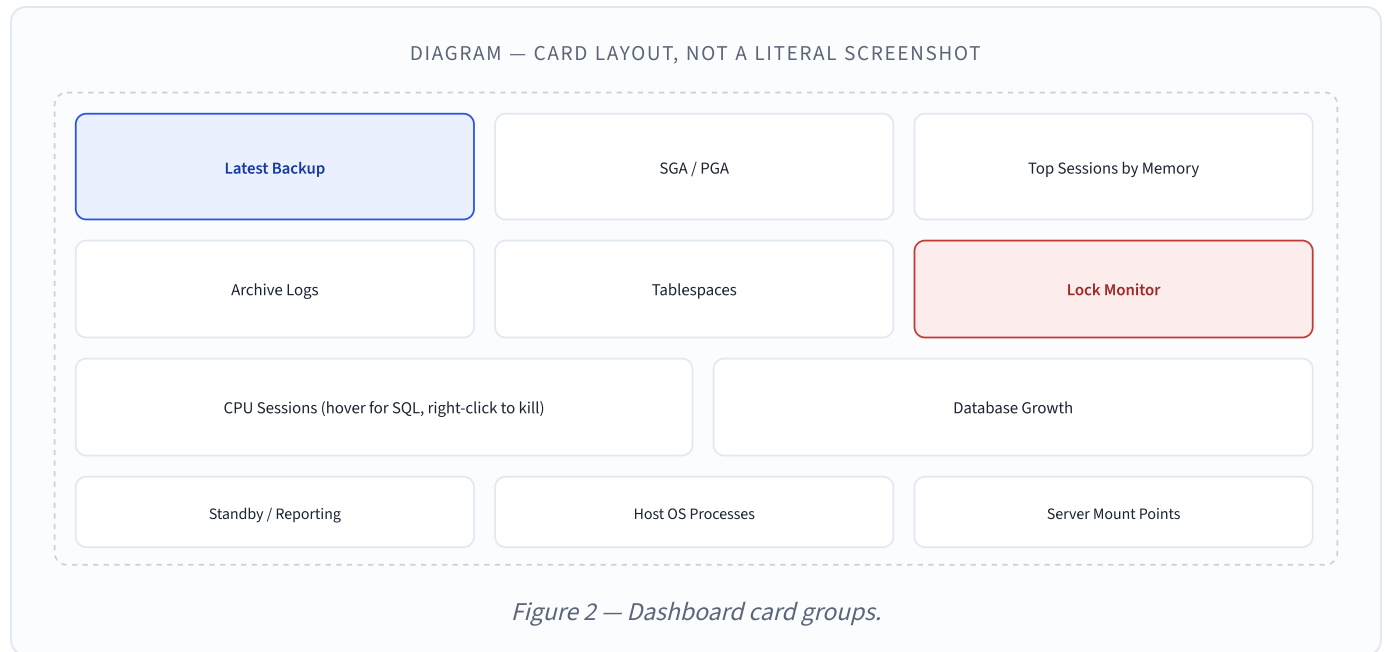

CARD	WHAT IT SHOWS
Latest Backup	Last RMAN backup result and a 7-day size bar chart.
SGA / PGA	Memory used/free as a circular gauge — green below 50%, amber 50–79%, red at 80% and above.
Archive Logs	Count, size and FRA usage; the bin icon opens archive cleanup (section 9).
Top Sessions by SGA / PGA	Sessions using the most memory — hover a row to see its current SQL.
Tablespaces	The largest tablespaces with usage bars; Show all lists every tablespace.
Session History	Active vs. total sessions over the last 24 hours.
Lock Monitor	"No Blocking Sessions", or the waiting/blocking session pair if one exists.
CPU Sessions / CPU Sessions (24h)	Bar charts by CPU usage — hover for the SQL, right-click to kill a session.
Database Growth	Current size and projected growth per day/week/month/year.
Standby Database Sync Status	Primary vs. applied log sequence per redo thread, and the gap — shown only if Standby is configured.
Reporting Database Status	Whether the Reporting database is reachable — shown only if configured.
Host Operating System Processes	Top CPU/memory processes on the host.
Server Mount Points	Disk usage for this database's host, with Healthy/Warning/Critical counts.

For the Standby card: a log gap of 0 or 1 on every redo thread reads as fully synchronized; a gap greater than 1 on any thread means that thread — and the database overall — is lagging.

8. Working with sessions

8.1 View the SQL a session is running

- Click a row in Oracle Database Processes to open the SQL window — SID, serial#, user, status, OS user, program and the SQL text, with a Copy SQL button.
- In the CPU charts, hover a bar to show the SQL in the Active SQL Query box.

8.2 Kill a session

- 1 Right-click a bar in a CPU chart (or a row in Oracle Database Processes) and choose **Kill Session** .
- 2 Check the SID, Serial# and username shown in the confirmation window.
- 3 Click **Yes, Kill Session** . A result window confirms success, or shows the error.

This cannot be undone

Killing a session runs `ALTER SYSTEM KILL SESSION '<sid>,<serial>' IMMEDIATE` — it ends the connection immediately and rolls back any uncommitted work. Confirm the SID/serial carefully, and check with the session's owner first unless it's actively blocking others.

9. Archive log cleanup

- 1 On the dashboard, click the bin icon on the **Archive Logs** card.
- 2 Review the archive destination **Retention** — 0, 1, 2, 3, 5, 7, 10, 15 or 30 days (10 is the default) — the window and last cleanup. Choose a **Period** shows how many logs are currently eligible for deletion.
- 3 Click **Delete Archive Logs** , read the warning, and confirm.
- 4 The result shows the number of logs deleted, the duration, and the RMAN output.

Permanent action

Deleted archive logs cannot be recovered from this application. Confirm they've been backed up — and applied on any Standby — before deleting. The button is disabled when the database isn't in ARCHIVELOG mode.

10. ASM disk groups

Where a database's host runs Grid Infrastructure/ASM, its disk group usage appears alongside the host's mount points and processes — no separate configuration screen is needed for this. It connects using a fixed Oracle Cloud Infrastructure-style OS account (`opc`) and switches to the Grid account (`grid` by default) automatically; your administrator only needs to set a different Grid account name in the configuration file if the host uses one.

If ASM shows unavailable

This doesn't affect the database's own Up/Down status — ASM checks are completely separate from the database connection. Ask your administrator to confirm SSH access for `opc` and passwordless `sudo` to the Grid account on that host.

11. Email alert settings

Click **Email Alert Settings** at the bottom of the sidebar.

11.1 Connect to Microsoft 365

- 1 Leave Authentication Type as **OAuth2 (Default — Microsoft Entra ID)**, or choose SMTP Basic Authentication if your administrator advises.
- 2 Enter the Tenant ID, Client ID and Client Secret from your Microsoft 365 administrator, plus the Sender Name and Sender Email.
- 3 Click **Connect Microsoft 365** — the badge changes to Connected, or shows the connection error.
- 4 Click **Test Connection** to send a test email.

Leave TLS validation switched on

Advanced Settings lets you disable certificate (TLS) validation — only your administrator should ever turn this off, and only for a known, trusted mail relay.

11.2 Recipients and alert rules

Add one or more recipients with a name, email and role label. Tick the built-in alert types you want (Database Down, Listener Down, Tablespace > 90%, Disk > 90%, CPU > 90%, Memory > 90%, RMAN Backup Failed, Archive Log Full, Blocking Sessions, Database Startup/Shutdown, and several Standby/Reporting conditions), or add a custom rule with your own metric and threshold.

11.3 Frequency and template

Choose to send once until the issue resolves, or repeat every 15, 30 or 60 minutes. Edit the subject/message template using {DATABASE_NAME}, {HOST}, {STATUS} and {DATE_TIME}. Click **Save Settings**.

A restart can duplicate an alert

"Once until resolved" tracking is kept in memory only — if the application restarts (including an automatic shutdown) while a condition is still active, you may receive a duplicate alert the next time it's evaluated, even though the underlying issue never actually cleared.

Email Send History at the bottom lists every alert sent, with its status; **Clear History** empties the list.

12. Status colours and thresholds

ITEM	GREEN	AMBER	RED
Database / listener	Up / Running	—	Down / unreachable
Sidebar dot	Healthy	Blocking session or backup not healthy	Tablespace $\geq 90\%$ or a critical mount point
SGA / PGA / tablespace gauges	$< 50\%$	50–79%	$\geq 80\%$
Mount point	$< 71\%$ Healthy	71–89% Warning	$\geq 90\%$ Critical
Backup	Completed and ran yesterday	Pending	—
Standby (per thread)	Log gap ≤ 1	—	Log gap > 1 , or DOWN
Email alert trigger	A fixed 90% for tablespace / disk / CPU / memory — note this is a different, stricter threshold than the 80% that turns a gauge red in the UI.		

13. Frequently asked questions and troubleshooting

QUESTION / PROBLEM	ANSWER
My databases disappeared.	The browser page was refreshed — this clears the configuration by design (5.2). Re-upload the file; use the in-page Refresh button instead of F5 going forward.
A card shows "Checking..." for a long time.	The database is being contacted for the first time; it should resolve within the next background poll cycle (about 25 seconds).
"Port 5001 is already in use".	Another copy is already running — use its browser tab, or close that console window first.
Mount points or processes show "Connection Failed".	SSH (port 22) is blocked, or the server username/password for that row is wrong or missing.
ASM disk groups are unavailable.	The opc SSH login or the passwordless switch to the Grid account isn't working on that host — ask your administrator to check (section 10). This never affects the database's own status.
Standby or Reporting shows DOWN.	That database can't be reached, or the Visual C++ Redistributable isn't installed on your PC — both are needed for this specific check.
I got two alert emails for the same unresolved problem.	Expected if the application restarted in between (11.3) — not a sign the condition happened twice.
"ORA-01017: invalid username/password".	Correct the username or password in the configuration file and upload it again.
Test email fails.	Check the Tenant ID, Client ID, Client Secret and sender mailbox with your Microsoft 365 administrator — the mailbox must allow SMTP sending.
Where are the log files?	In the <code>logs</code> folder next to the <code>.exe</code> — send these to support when reporting a problem. Note that <code>production_db.log</code> contains plaintext database passwords by design, so handle it as carefully as the configuration file.

End of User Manual.