

Dashboard Project — User Guide

Oct 6, 2026 · @Yuvarani S Kannan

1. Document control

This guide explains how to install, open and use DB Health Checker (build 1.9.24) day to day; it assumes no programming knowledge.

Field	Value
Product	DB Health Checker (DB_Health_Portal.exe)
Build covered	1.9.24
Document type	End-user guide
Audience	DBAs, operations and support staff who monitor Oracle databases
Companion document	Dashboard Project — Technical Documentation

Version	Date	Author	Change
1.0	2026-10-06	Yuvarani	First release of the user guide

2. Introduction

DB Health Checker shows, in one browser window, whether each of your Oracle databases is up and healthy, and emails you when something needs attention.

For every database listed in your registry file it checks three copies where they exist:

- **Production** — the main database.
- **Reporting** — a copy used for reports.
- **Standby** — the Data Guard / backup copy.

It reports database status, tablespace usage, sessions and backups, and also checks the database server itself: CPU, memory, disk mounts, ASM disk groups and the busiest processes.

The tool runs on your own Windows PC. It opens in your web browser at `http://localhost:8501` but is not a website: nothing is reachable from other machines unless your administrator sets that up.

3. Getting started

Unzip the release, double-click `DB_Health_Portal.exe`, and point the dashboard at your registry file; no Python or Oracle installation is needed.

3.1 Before you begin

You need	Why
Windows PC	The packaged exe is Windows only
Network access to each database host and port (usually 1521)	To check database status
SSH access (port 22) to each database host	To read CPU, memory, mounts and processes
Your registry file (.txt or .csv; Excel is not supported in build 1.9.24)	Lists the databases to monitor; see 3.4
SMTP server details (optional)	Only if you want email alerts
Firefox (optional)	Opened automatically if installed; otherwise your default browser is used

Downloads (only if needed)

The packaged dashboard already contains Python, all libraries and the Oracle client. You install nothing else, except in these cases:

Install	When	Official link
Microsoft Visual C++ Redistributable (x64)	Start-up fails with "VCRUNTIME140.dll" or "MSVCP140.dll was not found"	vc_redist.x64.exe
Mozilla Firefox	You want the dashboard to open in Firefox automatically	mozilla.org/firefox
7-Zip or Windows built-in unzip	Unzipping the release	Windows: right-click the zip → Extract All

To run from source code instead of the exe, follow section 10.1 of the Technical Documentation.

3.2 Install

1. Copy dashboard_1.9.24_exa.zip to your PC.
2. Unzip it to a folder you can write to, for example C:\DBHealth. Do not run it from inside the zip.
3. Keep the folder structure as it is. The config folder next to the exe holds your settings.

3.3 Start the dashboard

1. Double-click **DB_Health_Portal.exe**. A black console window opens; leave it open.
2. After about 3 seconds your browser opens at <http://localhost:8501>.
3. If port 8501 is busy, the dashboard uses the next free port between 8502 and 8519; check the address bar.
4. If the dashboard is already running, double-clicking the exe just opens a new browser tab to it.

3.4 First run: load your registry file

On first start you see the setup screen.

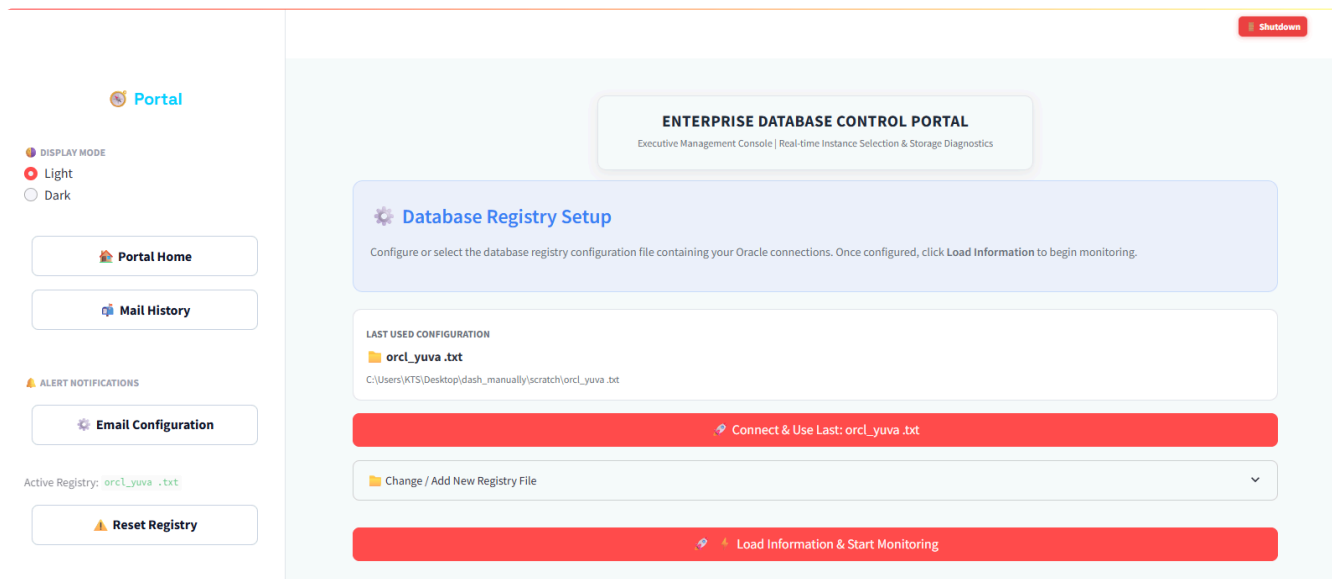


Figure 1 — Setup screen. The Last Used Configuration card shows your previous registry file; press Connect & Use Last to reuse it.

1. Open **Change / Add New Registry File**.
2. Either choose **Upload File** and select your file, or choose **Enter File Path**, paste the full path and press **Connect Path**.
3. Press **Load Information & Start Monitoring**.

4. Next time, press  **Connect & Use Last** on the Last Used Configuration card to skip these steps.

The registry file holds one line per database with 20 space-separated values in three groups: production (8 values), reporting (6) and standby (6). Write **NC** once in place of a group's first value to skip that whole group. Your administrator normally prepares this file for you.

3.5 Stop the dashboard

Press the red  **Shutdown** button at the top right. Closing all browser tabs also stops it after about 10 seconds.

4. Dashboard tour

The dashboard has four screens — Home, Database Health (Monitoring), Mail History and Email Configuration — all reached from the left sidebar.

4.1 Sidebar

 **Portal**

 **DISPLAY MODE**

☒ Light

☐ Dark

 **Portal Home**

 **Mail History**

DATABASE CONNECTIONS

 **orcl**

 Previous Registries

▼

 **ALERT NOTIFICATIONS**

 **Email Configuration**

Active Registry: `demo_registry.txt`


 **Reset Registry**

Page 5 of 28

Figure 2 — Sidebar. The database button takes the colour of its status (green = Healthy).

Item	What it does
Display Mode	Switches between Light and Dark theme
 Portal Home	Returns to the Home screen and reloads data
 Mail History	Opens the sent-alert history (password protected)
Database Connections	One button per database, worst status first; the open one shows (Active)
 Previous Registries	Switch to a registry file you used before
 Alert Notifications	New alerts pop up here as short messages
 Email Configuration	Opens the email settings screen
 Reset Registry	Forgets the current registry file and email fields and returns to setup

4.2 Home screen

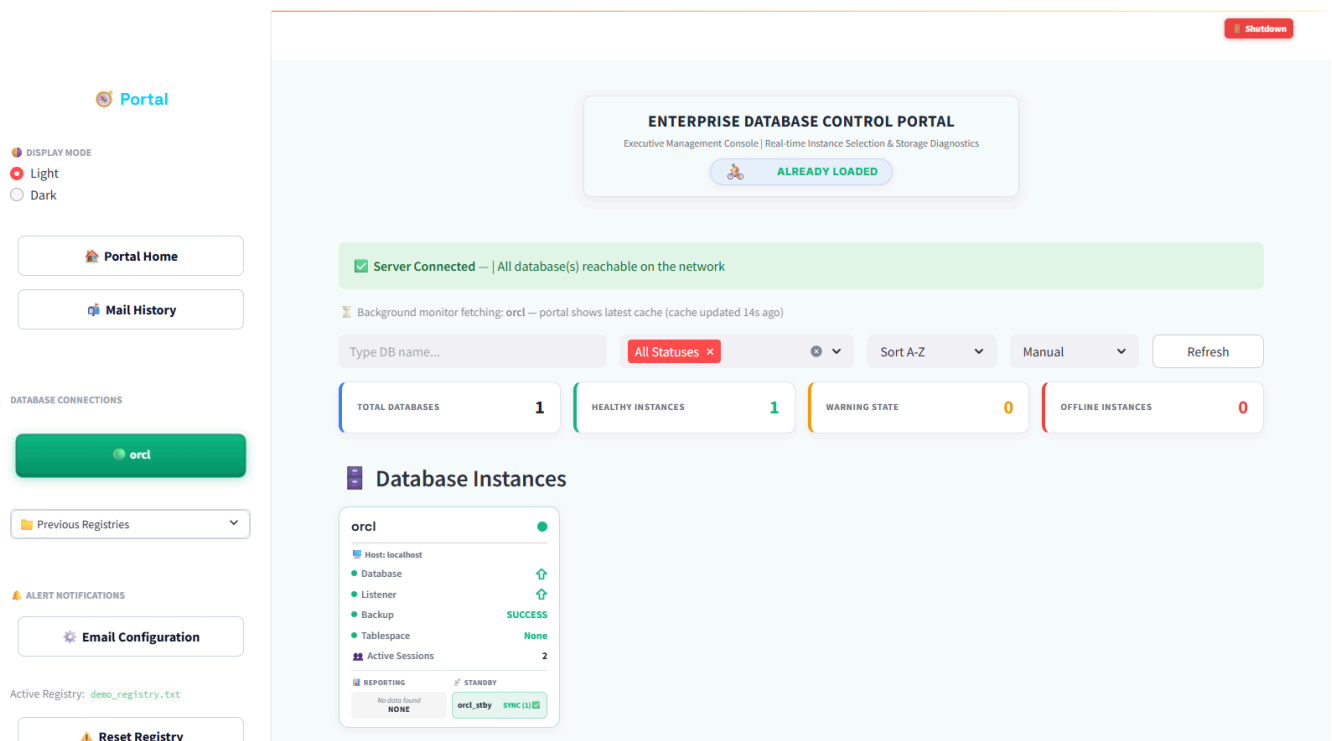

ENTERPRISE DATABASE CONTROL PORTAL
Executive Management Console | Real-time Instance Selection & Storage Diagnostics

ALREADY LOADED

✓ **Server Connected** — | All database(s) reachable on the network

Background monitor fetching: orcl — portal shows latest cache (cache updated 14s ago)

Type DB name... All Statuses ✕ Sort A-Z Manual Refresh

TOTAL DATABASES	1	HEALTHY INSTANCES	1	WARNING STATE	0	OFFLINE INSTANCES	0
-----------------	---	-------------------	---	---------------	---	-------------------	---

Database Instances

orcl (Healthy)

- Host: localhost
- Database: ↑
- Listener: ↑
- Backup: **SUCCESS**
- Tablespace: **None**
- Active Sessions: 2

REPORTING: No data found NONE | STANDBY: **orcl_stby SYNC (1)**

Figure 3 — Home screen with a healthy database: Database and Listener up, Backup SUCCESS, no full tablespaces, and the standby orcl_stby in SYNC.

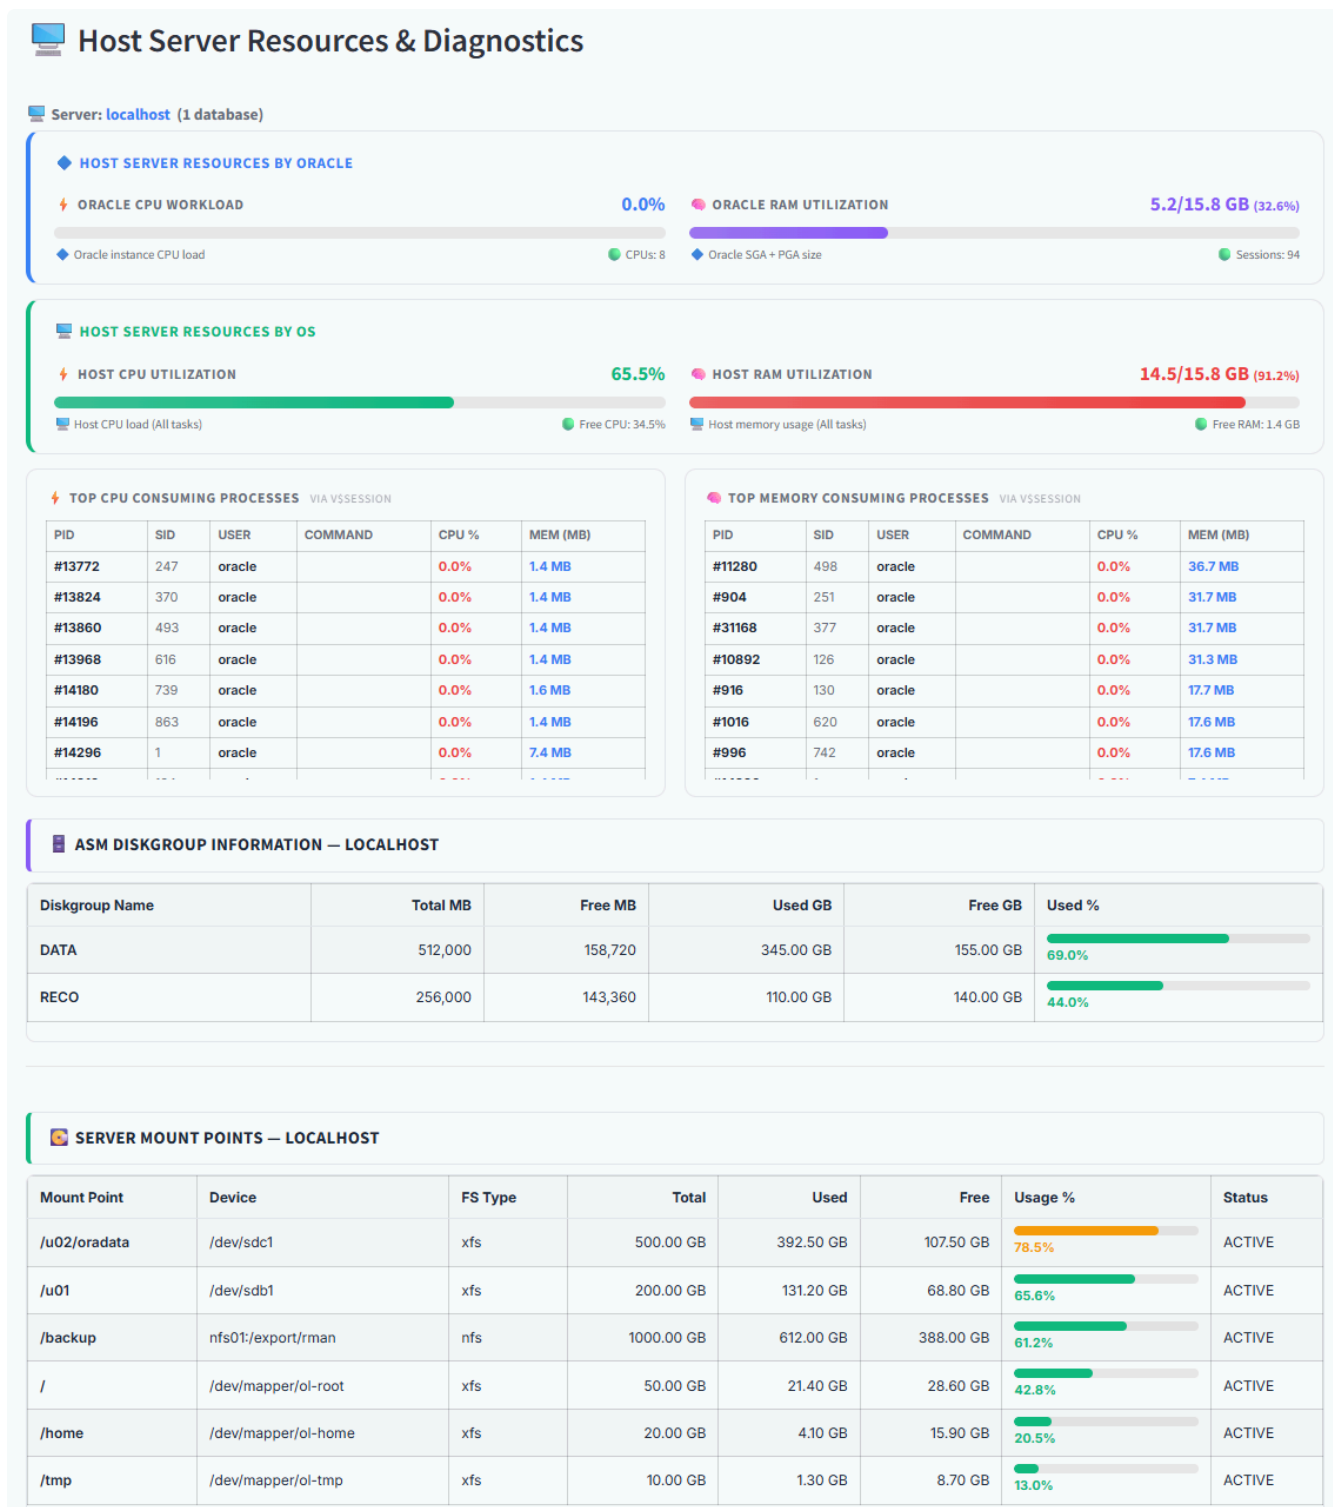


Figure 4 — Host Server Resources & Diagnostics: Oracle and OS CPU/RAM, top CPU and memory processes, ASM disk groups and server mount points.

- **Summary ribbon** — Total Databases, Healthy Instances, Warning State and Offline Instances (Offline counts Critical databases).
- **Toolbar** — search by name, filter by status, sort A-Z or Z-A, choose Manual or Automatic refresh, set the interval (default 20 minutes) and press **Refresh**.
- **Monitor line** — shows when the background check last ran; it repeats every 2 minutes.

- **Database cards** — four per row, Critical first. Each card shows host, Database and Listener up/down, last backup, tablespaces at 90% or more, active sessions, errors, and Reporting and Standby status. Click a card to open its detail screen.
- **Host Server Resources & Diagnostics** — one section per server: CPU and memory used by Oracle and by the whole OS, top CPU and memory processes, ASM disk groups and mount points.

4.3 Database Health screen

Opened by clicking a card or a sidebar database button. Use **← Back** to return.

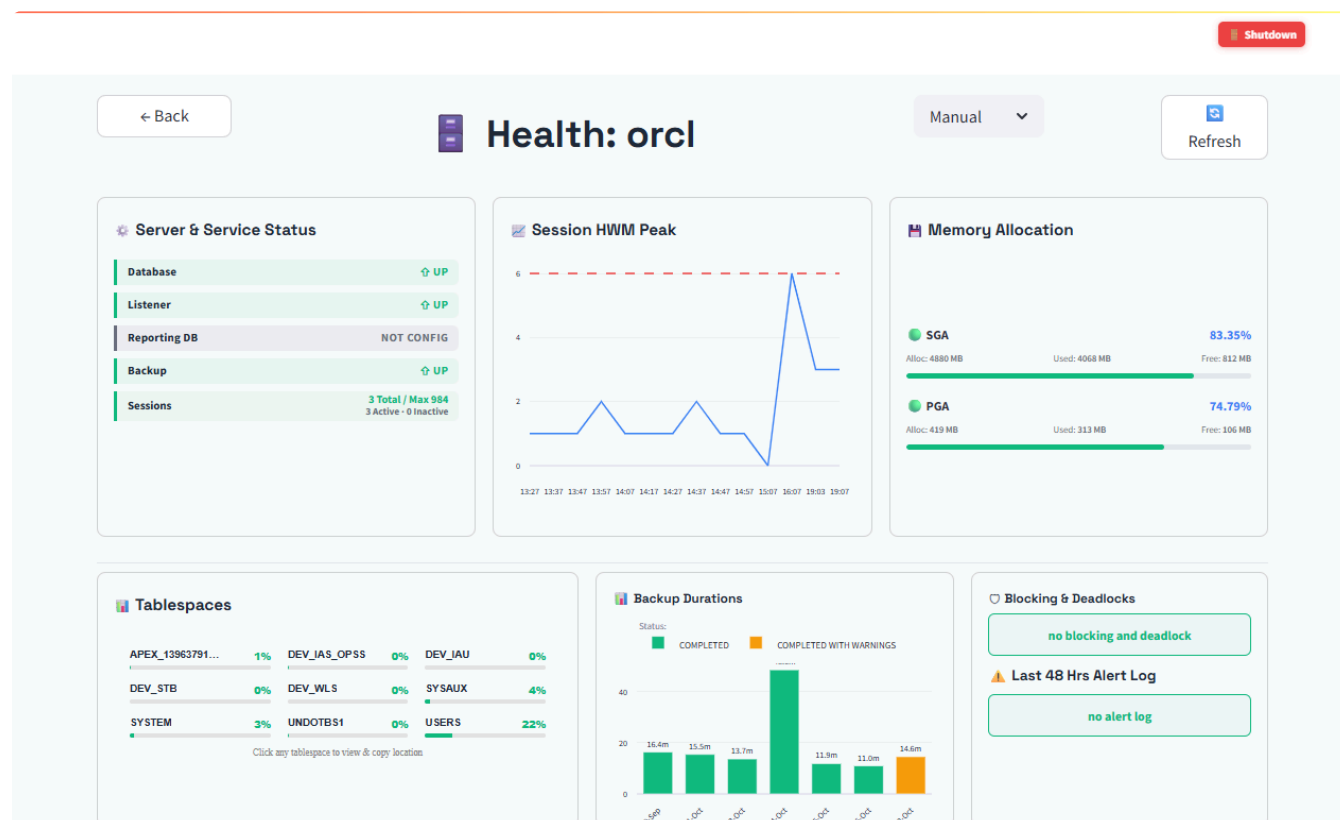


Figure 5 — Database Health screen, top: service status, session peak, SGA/PGA memory, tablespaces, 7 days of backup durations (green = completed, amber = completed with warnings), blocking and alert log.

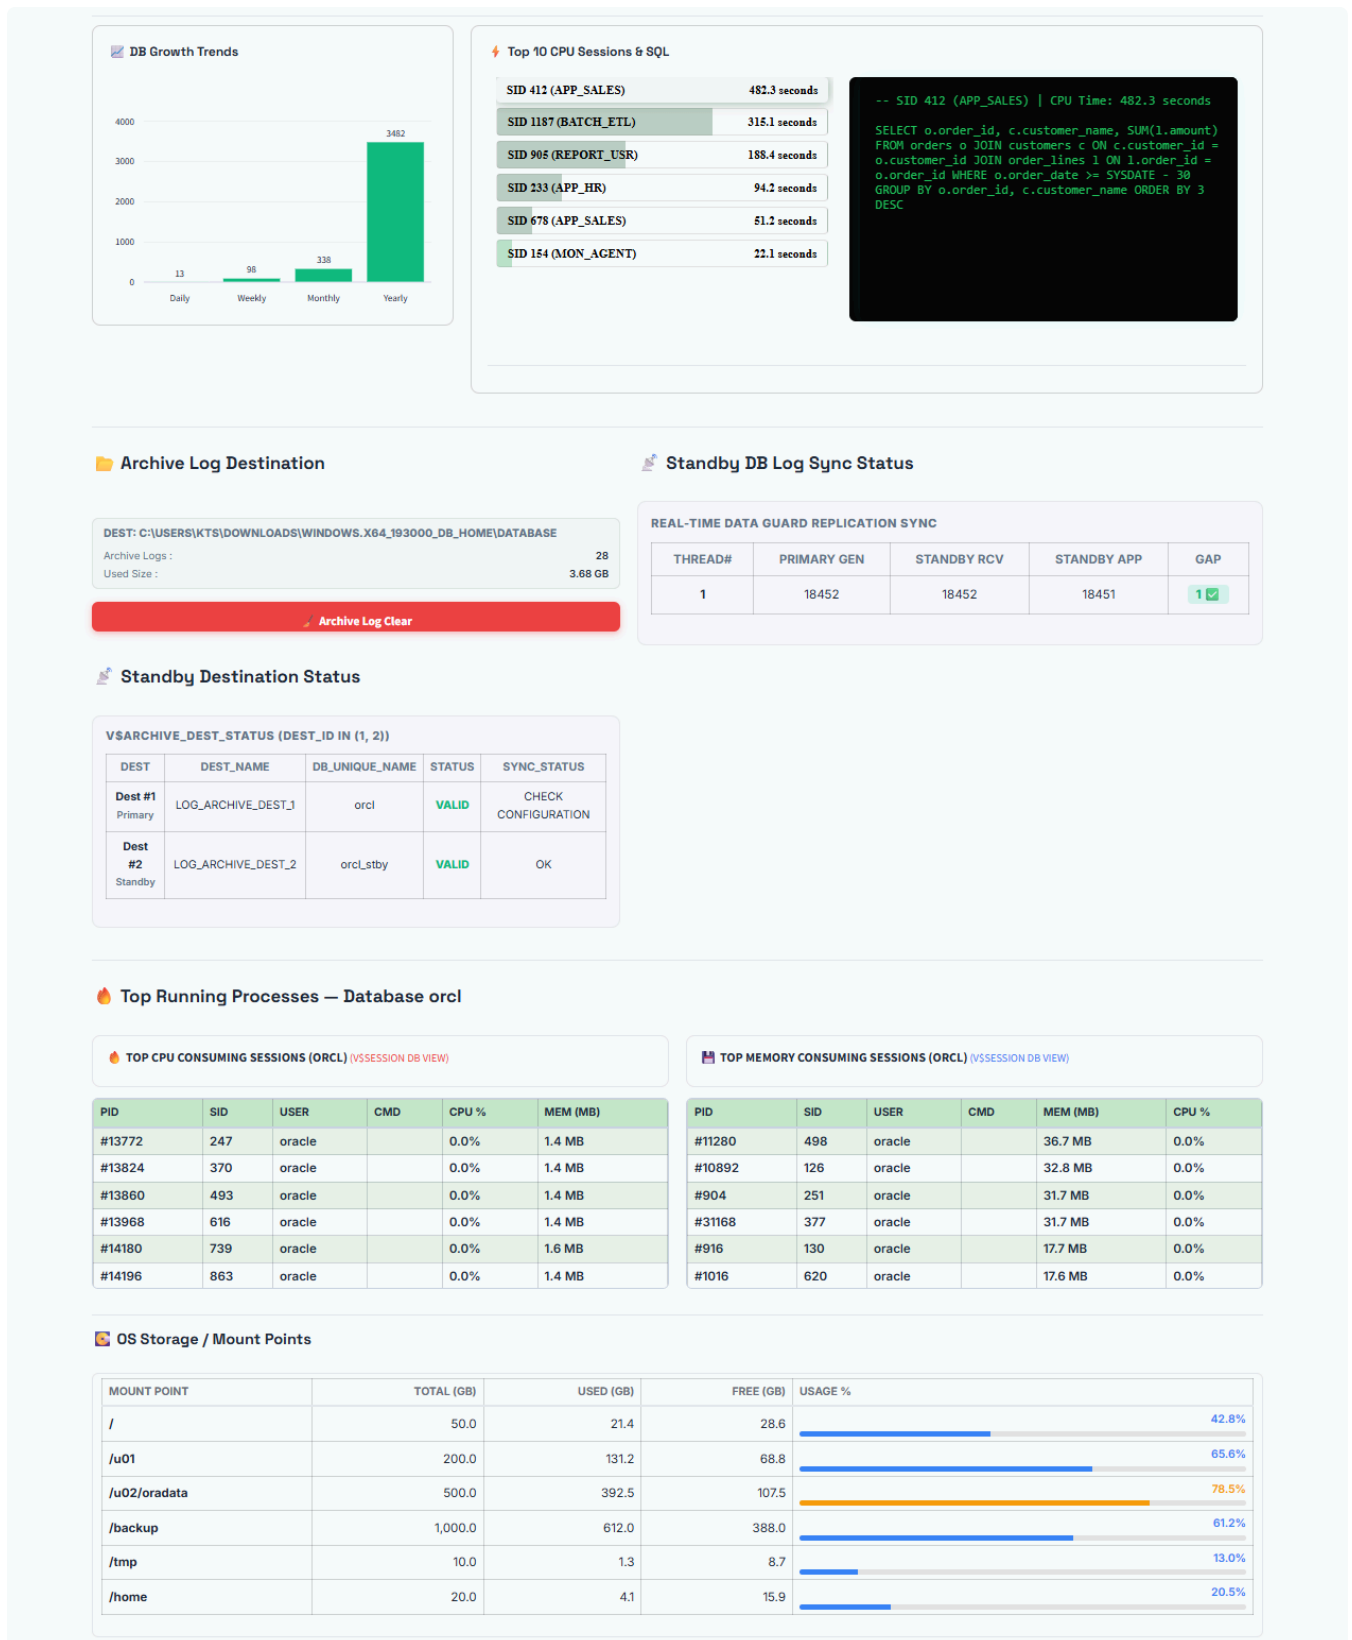


Figure 6 — Database Health screen, lower part: DB growth, Top 10 CPU sessions with the selected session's running SQL, archive log destination, standby log sync (gap 1 = in sync), standby destinations, top processes and OS mount points.

Note on Figures 3–6: captured from a demo database. Live values (status, sessions, tablespaces, memory, CPU, processes, growth, last backup) are real. Backup history, standby, ASM, mount-point and CPU-session/SQL values are sample data added for illustration, because the demo PC has no standby or Linux host.

Area	Shows
Server & Service Status	Database, Listener, Reporting DB, Backup, Sessions
Session HWM Peak	Current sessions against the 24-hour peak
Memory Allocation	SGA and PGA use
Tablespaces	Up to 12 tablespaces; click one to see and copy its datafile location
Backup Durations	Recent backups as bars coloured by result
Blocking & Deadlocks, Last 48 Hrs Alert Log	Locking problems and recent ORA- errors
DB Growth Trends	Growth per day, week, month or year
Top 10 CPU Sessions & SQL	Heaviest sessions; hover to see SQL, copy it, or kill the session
Archive Log Destination	Fast Recovery Area use, with an Archive Log Clear button
Standby Destination / Log Sync Status	Whether the standby is receiving and applying logs
Top Running Processes, OS Storage / Mount Points	Server processes and disk use for this database's host

4.4 Mail History screen

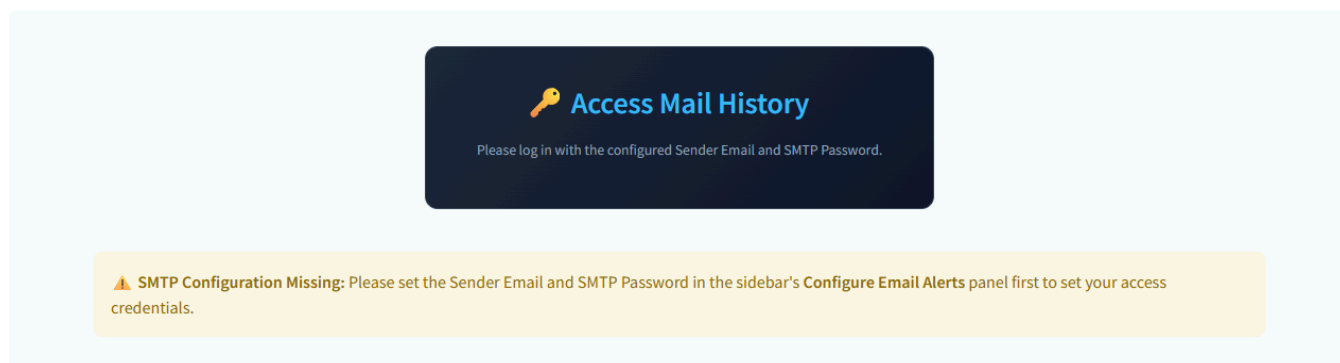


Figure 7 — Mail History login. The warning appears until email is configured; configure it under  Email Configuration (the message refers to it by an older name).

Enter the configured sender email and SMTP password to unlock it. It shows totals (Sent, Failed, Disabled), filters by status, alert type and database, and lists up to 100 alerts with **View Details**.  **Clear All History** empties the list.

4.5 Email Configuration screen

Email Configuration

Configure SMTP settings, test email delivery, and choose which alert events trigger notifications.

SMTP Server Settings

SMTP Server	?	SMTP Port	?
e.g. smtp.office365.com		e.g. 587	- +
SMTP Username	?	SMTP Password	?
e.g. alerts@company.com		Enter SMTP password	👁
Sender Email Address	?	Recipient Email Address(es)	?
e.g. oracle-alerts@company.com		admin1@company.com, admin2@company.com	

☐ ☒ Enable Email Alerts ?

 Save Configuration

 Send Test Email

Notification Preferences

☒ Select the alert types for which you want to receive email notifications. Deselected alerts will be suppressed — no email will be sent, but events are still logged.

☒ Select All

☐ Deselect All

DATABASE AVAILABILITY

- | | | |
|--|---|---|
| ☐ Database Down | ☐ Listener Down | ☐ Database Not Reachable |
| ☐ Database Instance Restarted | ☐ Host Server Down | |

BACKUP

- ☐ Backup Failure

TABLESPACE & DATAFILES

- | | | |
|---|--|---|
| ☐ Tablespace Usage Critical (≥90%) | ☐ Tablespace Usage Warning (≥80%) | ☐ Undo Tablespace Critical |
| ☐ Temporary Tablespace Critical | ☐ Datafile Autoextend Failure | |

ARCHIVE LOG & FRA

- | | | |
|---|---|--|
| ☐ Archive Log Destination Full | ☐ Archive Log Generation Failure | ☐ FRA Usage Critical (≥90%) |
|---|---|--|

SESSIONS & LOCKS

- | | | |
|--|---|--|
| ☐ High Session Count (>85% max) | ☐ Blocking Sessions Detected | ☐ Long Running Sessions |
| ☐ Deadlock Detected | | |

CPU & MEMORY

- | | | |
|---|--|--|
| ☐ High CPU Usage | ☐ High Memory Usage | ☐ CPU Consuming Process Threshold |
| ☐ Memory Consuming Process Threshold | | |

STORAGE & MOUNT POINTS

- | | | |
|--|---|--|
| ☐ Mount Point Usage Critical (≥90%) | ☐ Mount Point Usage Warning (≥80%) | ☐ Filesystem Not Accessible |
| ☐ Disk Usage Critical | ☐ ASM Diskgroup Usage Critical | |

NETWORK & CONNECTIVITY

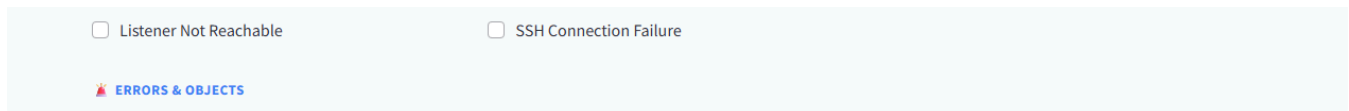


Figure 8 — Email Configuration. Fill the SMTP fields, save, send a test email, then tick alert types and save the preferences.

Holds SMTP settings, recipients, the Enable Email Alerts switch and 32 alert-type checkboxes. Settings are saved per registry file. Steps are in section 5.

5. Step-by-step tasks

The tasks below cover daily checks, alert setup and the two actions that change a database: killing a session and clearing archive logs.

5.1 Do the daily health check

1. Open the dashboard and look at the summary ribbon. Warning State and Offline Instances should be 0.
2. Set the status filter to **Critical**, then **Warning**, and open each card listed.
3. On each card read the Errors line and the Backup, Tablespace and Standby values.
4. Scroll to Host Server Resources and check for red CPU, memory, ASM or mount bars.

5.2 Investigate one database

1. Click the database card or its sidebar button.
2. Check Server & Service Status first, then Tablespaces and Last 48 Hrs Alert Log.
3. To find a slow query, hover a bar in Top 10 CPU Sessions & SQL and press **Copy SQL**.
4. Press **← Back** when finished.

5.3 Refresh data

- **Now:** press **Refresh** (Home) or  **Refresh** (Database Health).
- **Automatically:** set Refresh Mode to **Automatic** and choose the interval in minutes.
- The card area also updates itself every 30 seconds, and the background check runs every 2 minutes.

5.4 Set up email alerts

1. Load your registry file first; email settings are saved for that file.
2. Open  **Email Configuration**.
3. Fill in SMTP Server, SMTP Port, SMTP Username, SMTP Password, Sender Email Address and Recipient Email Address(es), separated by commas.

4. Switch on  **Enable Email Alerts** and press  **Save Configuration**.
5. Press  **Send Test Email** and confirm it arrives.
6. Under  **Notification Preferences**, tick the alert types you want, or press Select All. All types are off by default, and only the 7 types in section 10.1 send email.
7. Press  **Save Notification Preferences**.

5.5 Kill a blocking or runaway session

This ends a user's work immediately. Confirm with the application owner first.

1. Open the database's health screen.
2. In Top 10 CPU Sessions & SQL, hover the session's bar. Red bars are blocking sessions.
3. Check the SID, user and SQL, then press  **Kill Session (SID)**.

5.6 Clear old archive logs

Use this when the Archive Log Destination bar is amber (70% or more) or red (90% or more). It permanently deletes archive logs older than 15 days through RMAN, so confirm that backups and the standby have them first.

1. Open the database's health screen and scroll to  **Archive Log Destination**.
2. Press  **Archive Log Clear** and wait for the result message.

5.7 Switch to another registry file

- Open  **Previous Registries** in the sidebar and pick the file, or
- press  **Reset Registry** and load a new file as in 3.4.

6. Understanding alerts and statuses

Every database gets one overall colour: red if it is down or its backup failed, amber if something is filling up or blocked, green otherwise.

6.1 Overall database status

Colour	Status	Triggered by any of
 Red	Critical	Database down; listener down; backup failed; standby log gap
 Amber	Warning	Backup pending or warning; a tablespace at 90% or more; blocking sessions; deadlock; sessions over the limit; an alert-log error

Colour	Status	Triggered by any of
 Green	Healthy	None of the above
 Blue	Loading	First check still running

6.2 Card values

Field	Value	Meaning
Backup	SUCCESS	A backup completed within the last day
Backup	PENDING	The last completed backup is more than a day old
Backup	FAILED	The last backup job failed
Tablespace	names in red	These permanent tablespaces are 90% full or more (TEMP and UNDO are ignored)
Reporting	UP / issue check it / NONE	Reachable / problem / not configured
Standby	SYNC	Log gap of 0 or 1
Standby	NOT-SYNC	Log gap of 2 or more
Standby	NONE	Not configured
Errors	host username and password is wrong	SSH login to the server failed; check the registry file

6.3 Colour thresholds for gauges and bars

Metric	Amber from	Red from
CPU and memory (Oracle and OS)	over 70%	over 85%
Tablespace (health screen)	over 70%	over 85%
ASM disk group, mount point (Home)	over 75%	over 90%
Mount point (health screen)	70%	90%
Archive log destination (FRA)	70%	90%
Sessions	over max(20, 60% of limit)	over max(50, 85% of limit)

Metric	Amber from	Red from
Standby destination	INACTIVE	any state other than VALID

6.4 Email alerts

An email is sent only when email alerts are enabled and that alert type is ticked in Notification Preferences. New alerts also appear as pop-ups under  Alert Notifications, and every email the dashboard tries to send is listed in Mail History; alert types you have not ticked are not listed. Only 7 alert types send email — see section 10.

7. Troubleshooting and FAQ

Most problems come from the registry file, network access or email settings; check those first.

Symptom	Likely cause	What to do
Browser does not open	Browser launch blocked	Open http://localhost:8501 yourself; if busy, try 8502–8519
Exe closes immediately	Run from inside the zip, or folder not writable	Unzip to a writable folder such as C:\DBHealth
Setup screen every time	Registry path not saved or file moved	Load the file again; use Connect & Use Last next time
Card shows Database ↓	Database or network down, or wrong host/port/service	Check the registry line; ask your DBA
host username and password is wrong	SSH credentials in the registry are wrong	Correct the host username/password columns
Reporting shows NONE	Reporting group set to NC	Expected if that database has no reporting copy
Standby shows NOT-SYNC	Standby is 2 or more logs behind	Tell your DBA to check log shipping and apply
Server resources missing	SSH (port 22) blocked from your PC	Ask your network team to open SSH to the host
Data looks old	Background check still running	Press Refresh; the monitor line shows the last run

Symptom	Likely cause	What to do
Test email fails	Wrong SMTP server, port or password, or relay blocked	Check settings with your mail administrator
No alert emails	Alerts disabled or alert types unticked	Enable alerts and tick the 7 working types (5.4, 10.1)
Cannot open Mail History	Wrong sender email or SMTP password	Use the values saved in Email Configuration
Dashboard stopped by itself	All browser tabs were closed for 10 seconds	Start the exe again

Is my data sent anywhere? No. The dashboard runs only on your PC and listens on 127.0.0.1. It contacts only your databases, their servers over SSH and your SMTP server.

Can two people use it? Each person runs their own copy on their own PC.

8. Preparing the registry file

The registry file is a plain text file with one line per database and 20 values separated by spaces; use .txt or .csv (Excel files cannot be read in build 1.9.24).

8.1 Column order

#	Column	Example (placeholder)	Notes
1	db_name	PRODDB	Name shown on the card
2	host	10.0.0.10	Database server IP or host name
3	port	1521	Listener port; 1521 if left empty
4	service_name	PRODDB_SVC	Oracle service name; db_name if empty
5	username	sys	sys connects as SYSDBA
6	password	<db_pwd>	Database password
7	host_username	oracle	Server (SSH) login

#	Column	Example (placeholder)	Notes
8	host_password	<host_pwd>	Server (SSH) password
9–14	reporting_db_name, host, port, service_name, username, password	RPTDB 10.0.0.20 1521 RPTDB_SVC sys <db_pwd>	Or a single NC
15–20	standby_db_name, host, port, service_name, username, password	STBYDB 10.0.0.30 1521 STBYDB_SVC sys <db_pwd>	Or a single NC

8.2 Examples

```
# Production, reporting and standby
PRODDDB 10.0.0.10 1521 PRODDDB_SVC sys <db_pwd> oracle <host_pwd> RPTDB
10.0.0.20 1521 RPTDB_SVC sys <db_pwd> STBYDB 10.0.0.30 1521 STBYDB_SVC sys
<db_pwd>

# No reporting copy
PRODDDB 10.0.0.10 1521 PRODDDB_SVC sys <db_pwd> oracle <host_pwd> NC STBYDB
10.0.0.30 1521 STBYDB_SVC sys <db_pwd>

# Production only
PRODDDB 10.0.0.10 1521 PRODDDB_SVC sys <db_pwd> oracle <host_pwd> NC NC
```

8.3 Rules

1. One database per line; separate values with spaces or tabs.
2. Values must not contain spaces. A password with a space shifts every following column.
3. Write **NC** once to skip a whole reporting or standby group — not once per column.
4. NC as the first value hides that line from the Home page.
5. Lines starting with # and blank lines are ignored.
6. Do not add a header line to a .txt file; it would be read as a database. A .csv may have a header row.

8.4 Common mistakes

Mistake	What you see	Fix
NC repeated for every column	Standby values land in wrong columns; standby shows errors	One NC per skipped group
Password containing a space	Card shows wrong host or login errors	Remove spaces or ask your DBA for a different password
Wrong host_username / host_password	✗ host username and password is wrong	Correct columns 7 and 8
Service name instead of SID (or reverse)	Database ↓ with ORA-12505 / ORA-12154	Check the service name with your DBA
Excel file uploaded	Error reading database registry file	Save as .csv or .txt

8.5 Keep it safe

The file contains passwords in plain text. Store it in a folder only you can open, never email it, and delete old copies after switching files.

9. Screen-by-screen field reference

Every label, column and button you can see, in the order it appears on screen.

9.1 Home — controls

Control	Use
 Search Database Name...	Shows only cards whose name contains the text
Status filter	All Statuses,  Healthy,  Warning,  Critical (pick up to two individual statuses, or All)
Sort	A-Z or Z-A
Refresh Mode	Manual or Automatic
Refresh every N minutes	Shown in Automatic mode; default 20, minimum 1
Refresh	"Clear Status Cache & Refresh Statuses" — reloads everything now

9.2 Home — database card

Field	Values
Health dot	Green / amber / red / blue; hover for "System Diagnostics" reasons
 Host	Server address from the registry
Database	↑ up, ↓ down, △ pending
Listener	↑ up, ↓ down, △ pending
Backup	SUCCESS, PENDING, FAILED
Tablespace	None, or names of tablespaces ≥ 90% with "N MB free"
 Active Sessions	Number of active user sessions
Errors	e.g.  host username and password is wrong
 Reporting	UP, issue check it, No data found / NONE
 Standby	SYNC (n)  , NOT-SYNC (n)  ,  DOWN / ERROR, Connecting..., NONE

9.3 Home — Host Server Resources & Diagnostics

Panel	Fields / columns
 Host Server Resources by Oracle	⚡ Oracle CPU Workload %, 🧠 Oracle RAM Utilization GB (%), CPUs, Sessions
 Host Server Resources by OS	⚡ Host CPU Utilization, 🧠 Host RAM Utilization, Free CPU, Free RAM
⚡ Top CPU / 🧠 Top Memory Consuming Processes	PID, SID, USER, COMMAND, CPU %, MEM (MB); labelled via SSH or via v\$session
ASM Diskgroup	Diskgroup Name, Total MB, Free MB, Used GB, Free GB, Used %
Server Mount Points	Mount Point, Device, FS Type, Total, Used, Free, Usage %, Status

9.4 Database Health screen

Panel	Fields, columns and actions
Header	← Back, Refresh Mode, Refresh every N Minute(s),  Refresh
 Server & Service Status	Database, Listener, Reporting DB, Backup (⬆ UP, △ PENDING, NOT CONFIG, ⬇ DOWN); Sessions "Total / Max" and "Active · Inactive"
 Session HWM Peak	Line chart: Peak (dashed red) and Current. A brand-new chart starts with sample points until real history builds up
 Memory Allocation	SGA % and PGA % with Alloc / Used / Free MB
 Tablespaces	Bars with %; hover: Allocated, Used, Free, Max Size, Free on Max Size (MB), Location; click a row then Copy Location
 Backup Durations	Bars in minutes; hover: Date, Status, Duration
 Blocking & Deadlocks	BLOCKING SID → WAITING SID with seconds; or "no blocking and deadlock"
 Last 48 Hrs Alert Log	time: ORA- message; or "no alert log"

Panel	Fields, columns and actions
 DB Growth Trends	Daily, Weekly, Monthly, Yearly growth in MB (shows example values until growth tracking is set up by your DBA)
 Top 10 CPU Sessions & SQL	SID (user) and seconds; SQL QUERY Pinned Details;  Copy SQL;  Kill Session (SID)
 Archive Log Destination	FRA: Used %, Allocated / Used / Free GB; or Dest, Archive Logs, Used Size;  Archive Log Clear
 Standby Destination Status	DEST, DEST_NAME, DB_UNIQUE_NAME, STATUS, SYNC_STATUS
 Standby DB Log Sync Status	THREAD#, PRIMARY GEN, STANDBY RCV, STANDBY APP, GAP
 Top Running Processes	PID, SID, USER, CMD, CPU %, MEM (MB); refreshes every 30 s
 OS Storage / Mount Points	Mount Point, Total (GB), Used (GB), Free (GB), Usage %

Kill Session and Archive Log Clear act immediately with no confirmation prompt.

9.5 Mail History

Element	Detail
Login	Sender Email and SMTP Password from Email Configuration
Totals	Total Alerts,  Sent,  Failed,  Disabled
Filters	Status (All / Sent / Failed / Disabled); Type (Database Down, Listener Down, Tablespace, Archive Log, Mount Point, ORA Error, Deadlock, Blocking Session, Test Alert, General); search by DB or server
Each record	Subject,  Server,  DB,  To, status, time, error;  View Details shows the first 300 characters
 Clear All History	Deletes all records

9.6 Email Configuration

Field	Example
SMTP Server	smtp.yourcompany.com
SMTP Port	465 (SSL) or 587 (STARTTLS)
SMTP Username	alerts@yourcompany.com
SMTP Password	Masked
Sender Email Address	alerts@yourcompany.com
Recipient Email Address(es)	dba1@yourcompany.com, dba2@yourcompany.com
☒ Enable Email Alerts	On / Off
Buttons	 Save Configuration,  Send Test Email, Select All / Deselect All,  Save Notification Preferences

10. Alert types reference

The Email Configuration screen lists 32 alert types, but in build 1.9.24 only the 7 below actually send email; tick these to receive alerts.

10.1 Alerts that send email

Checkbox	You get an email when	First thing to do
Database Down	The dashboard cannot connect to the database (including wrong password)	Check the instance and the registry credentials
Listener Down	The listener does not answer on its port	Start the listener (lsnrctl start) or check the firewall
Tablespace Usage Critical ($\geq 90\%$)	A permanent tablespace is 90% full or more	Add a datafile or enable autoextend
Archive Log Destination Full	The Fast Recovery Area is 90% full, or an archiver error appears	Back up and clear archive logs (5.6)
Blocking Sessions Detected	One session is blocking another	Identify the blocker on the health screen; contact its owner

Checkbox	You get an email when	First thing to do
Deadlock Detected	A deadlock appears in the alert log in the last hour	Send the SQL to the application team
ORA Error Detected	A new ORA- error code appears in the alert log (last 48 hours)	Look up the code; check the alert log

Each alert is sent once when the problem starts and again only after it has cleared and returned. An ORA code is reported only the first time it is seen.

10.2 Alerts shown on screen but not emailed

These conditions still change card colours, but no email is sent: backup failure, high session count, Data Guard log gap and mount points at 90% or more. Check the dashboard for them.

10.3 Checkboxes with no effect yet

Database Not Reachable, Database Instance Restarted, Host Server Down, Backup Failure, Tablespace Usage Warning ($\geq 80\%$), Undo / Temporary Tablespace Critical, Datafile Autoextend Failure, Archive Log Generation Failure, FRA Usage Critical, High Session Count, Long Running Sessions, High CPU Usage, High Memory Usage, CPU / Memory Consuming Process Threshold, Mount Point Usage Critical / Warning, Filesystem Not Accessible, Disk Usage Critical, ASM Diskgroup Usage Critical, Listener Not Reachable, SSH Connection Failure, Alert Log Critical Errors, Invalid Database Objects.

10.4 Good to know

- All alert types are off until you tick them and press Save Notification Preferences.
- If a problem already exists when you tick its box, no email arrives until it clears and happens again.
- Unticked alerts are not recorded in Mail History.
- Alert emails are plain text with Server, Database, Alert Type, Severity, time and details.

11. Best practices and quick reference

Keep the dashboard open during working hours, tick the 7 working alert types, and treat Kill Session and Archive Log Clear as change-controlled actions.

11.1 Daily checklist

- ☐ Summary ribbon: Warning State and Offline Instances are 0
- ☐ No red or amber cards; open any that are
- ☐ Every Backup shows SUCCESS
- ☐ Every Standby shows SYNC
- ☐ No red CPU, memory, ASM or mount bars under Host Server Resources
- ☐ Mail History has no Failed sends

11.2 Weekly checklist

- ☐ Review DB Growth Trends and tablespaces above 70%
- ☐ Review Archive Log Destination use
- ☐ Send a test email to confirm alerts still reach you

11.3 Do and don't

Do	Don't
Keep the registry file in a private folder	Email or share the registry file
Confirm with the owner before killing a session	Kill SYS or background sessions
Confirm backups before Archive Log Clear	Run Archive Log Clear on a standby without checking apply status
Use the Shutdown button when finished	Close the console window while a refresh is running
Use .txt or .csv registry files	Use Excel registry files in build 1.9.24

11.4 Quick reference

I want to...	Do this
Start	Double-click DB_Health_Portal.exe
Load my databases	 Connect & Use Last, or  Change / Add New Registry File
See problems first	Status filter → Critical
Open one database	Click its card

I want to...	Do this
Reload now	Refresh
Auto-reload	Refresh Mode → Automatic
Set up email	 Email Configuration → Save → Send Test Email → tick alerts → Save Notification Preferences
See sent alerts	 Mail History
Switch registry	 Previous Registries or  Reset Registry
Stop	 Shutdown

12. Glossary and support

Term	Meaning
Registry file	Text or Excel file listing the databases to monitor, one per line
NC	"Not configured": skips a production, reporting or standby group
Production / Reporting / Standby	Main database / copy for reports / Data Guard copy
Listener	Oracle service that accepts new connections
Tablespace	Storage area inside a database
ASM disk group	Oracle-managed group of disks
FRA	Fast Recovery Area, where archive logs and backups are kept
Archive log	Record of changes used for recovery and standby
Log gap	How many archive logs the standby is behind
SGA / PGA	Oracle shared memory / per-session memory
SID	Session identifier
HWM	High-water mark: the highest value reached
SMTP	Protocol used to send email

Support

Need	Contact
Dashboard problems	Open question: support owner and email
Database issues	Your DBA team
Email/SMTP settings	Your mail administrator