



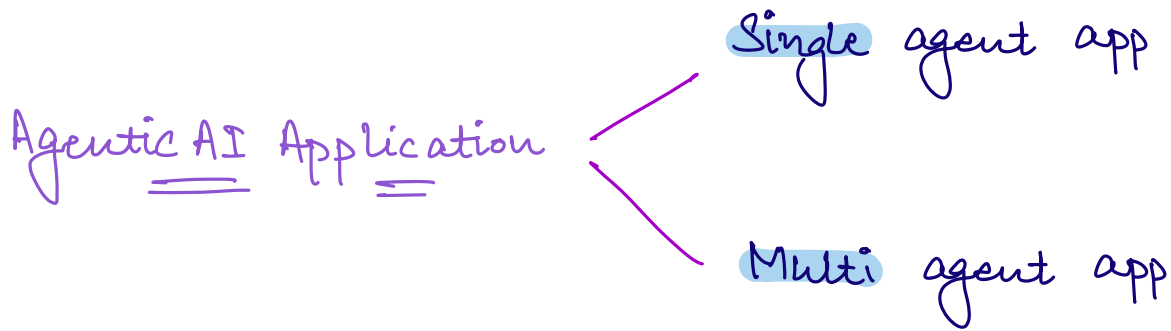

Use-Case: Content Writing Agent

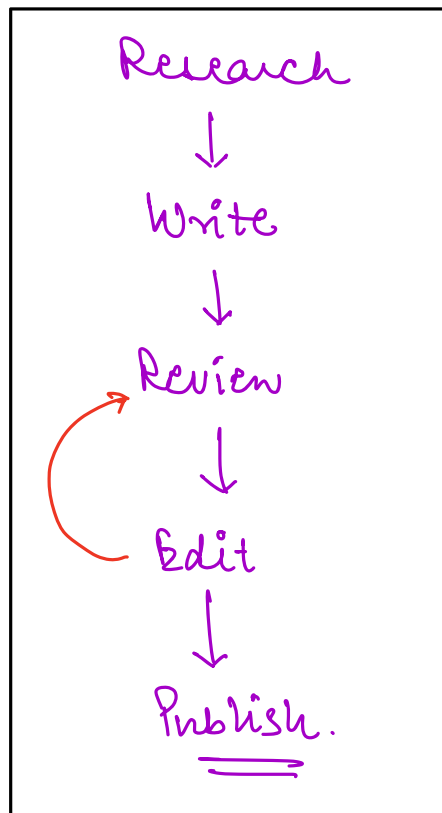

Use multi-agent system only when the task is complex enough.

If the task is simple & straight forward then single-agent system also works fine.

Multi-Agent Decomposition

Breaking down a complex use-case into smaller & manageable tasks.

Use-Case : HR Recruitment Platform.

HandOff Points

↳ Point where one agent passes the result/info. to the next agent.

Research Agent → Writing Agent

↳ Topic
↳ Facts
↳ Sources

```
{
  "agent": "ResearcherAgent",
  "task": "Collect facts about EV adoption",
  "result": [
    "EV demand is rising in urban India",
    "Charging infrastructure remains a key limitation",
    "Battery cost affects pricing"
  ],
  "assumptions": [
    "Focus is India market",
    "Audience is beginner-level"
  ],
  "confidence": "medium",
  "missing_info": [
    "Latest government subsidy numbers"
  ],
  "next_agent": "WriterAgent"
}
```

Sequential Multi-Agent Pipeline.

Agent-1 → Agent-2 → Agent-3 → final
response.

Collaborative Multi-Agent Workflow.

⇒ Agents can interact, review, challenge or improve each other's output.

HTTP


Agent need Http protocol to make any network call.

↪ External tool call.
↪ DB Call


HTTP

↪ Hyper Text Transfer Protocol.

↪ language used by Clients & Servers to communicate over the network.

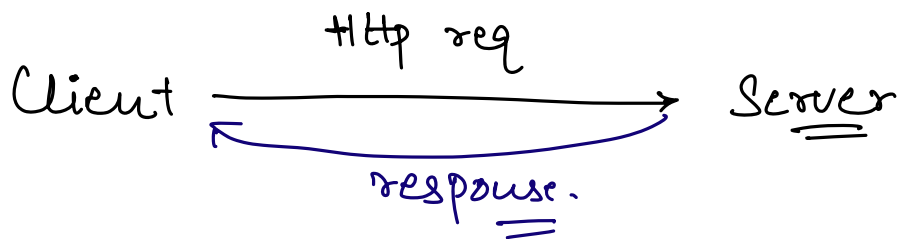

http | https → Secure.

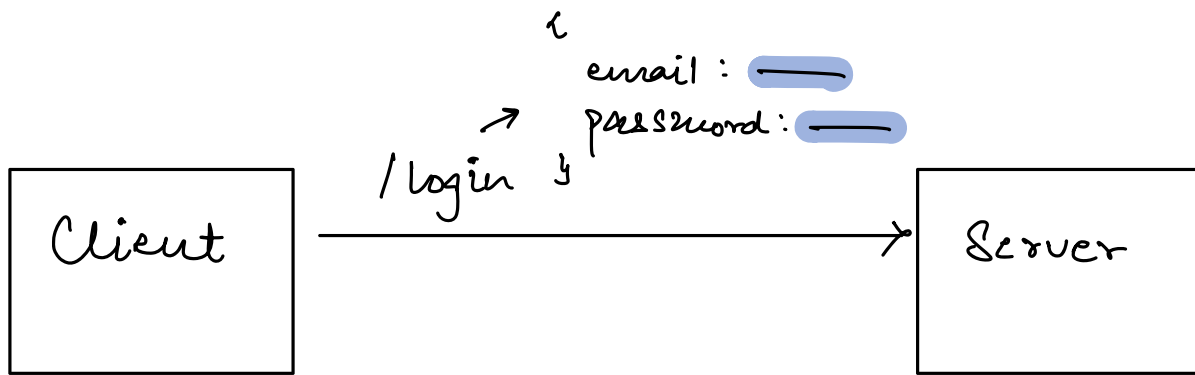

HTTP $\Rightarrow$ Transfers the data in the plain text over the network.
 $\Rightarrow$ Can be hacked.

HTTPS $\Rightarrow$ Secure


$\Rightarrow$ Encrypts the data while transferring.
 $\Rightarrow$ Safer & secure than http.

Http Request.

- $\rightarrow$ URL ✓
- $\rightarrow$ HEADERS
- $\rightarrow$ BODY
- $\rightarrow$ METHOD

[https://www.amazon.in/s?](https://www.amazon.in/s?k=iphone&crid=7PX81KB9ZQA3&srefix=iphone%2Caps%2C311)

[k=iphone&crid=7PX81KB9ZQA3&srefix=iphone%2Caps%2C311](https://www.amazon.in/s?k=iphone&crid=7PX81KB9ZQA3&srefix=iphone%2Caps%2C311)

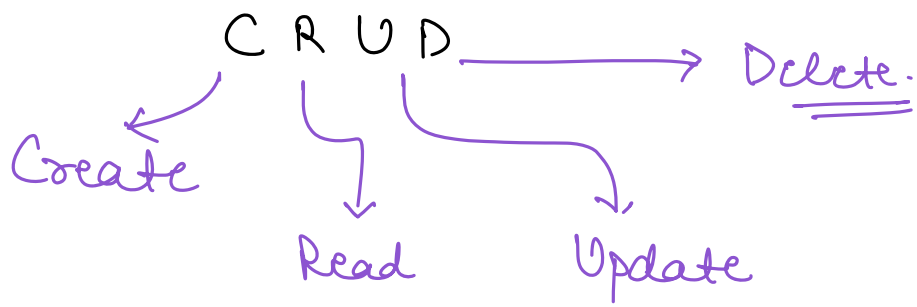

HTTP Methods.


POST : Create

GET : Read

PUT : Update

DELETE : Delete

Http Response

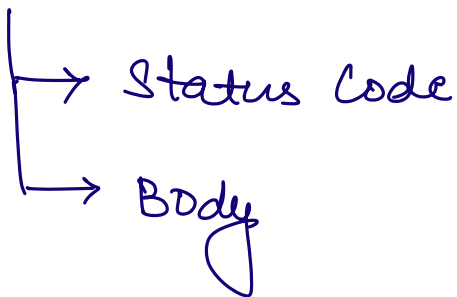

Http Status.

200 → Success

401 → Unauthorized

404 → Not Found

500 → Internal Server Error . . . -

Trigger.

↳ A trigger is something that starts the workflow.

Event

↳ It is a record that something has happened.

Webhook.

↳ Http request made by one system to another system whenever an event happens.

Ex: Razorpay makes webhook call whenever payment is success / failure

Automation