

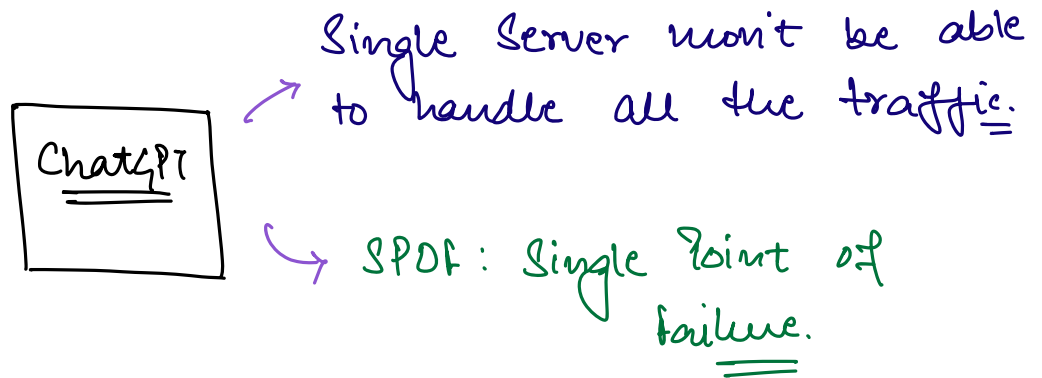


# # How a Software Application runs in Production?

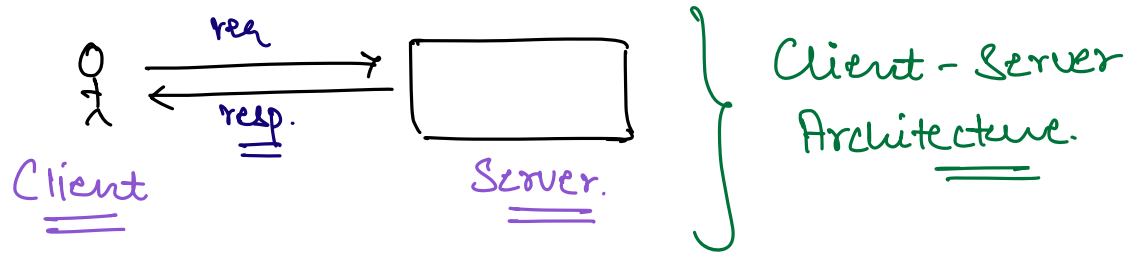

⇒

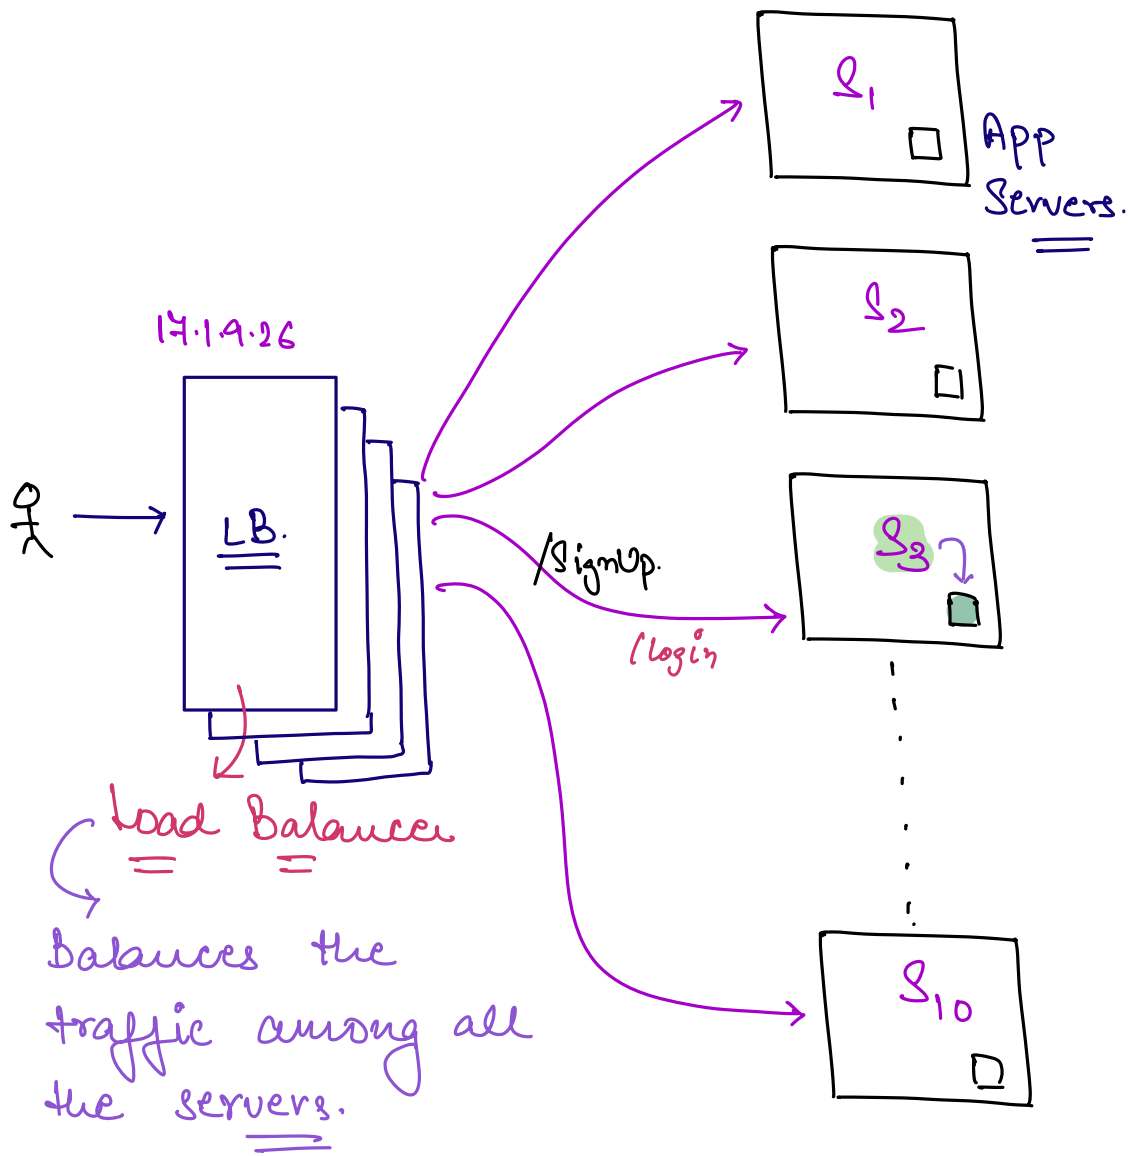

DNS.

| <u>Domain</u> | <u>Name</u> | <u>Server.</u> |
|---------------|-------------|----------------|
| Domains       |             | IP Address     |

amazon.in : 11.12.13.14


maxschool.com : 4.8.1.5

Chatgpt.com : [17.1.9.26, x, y, z]

↳ LB IP Address.

Replication.

↓  
Copy.

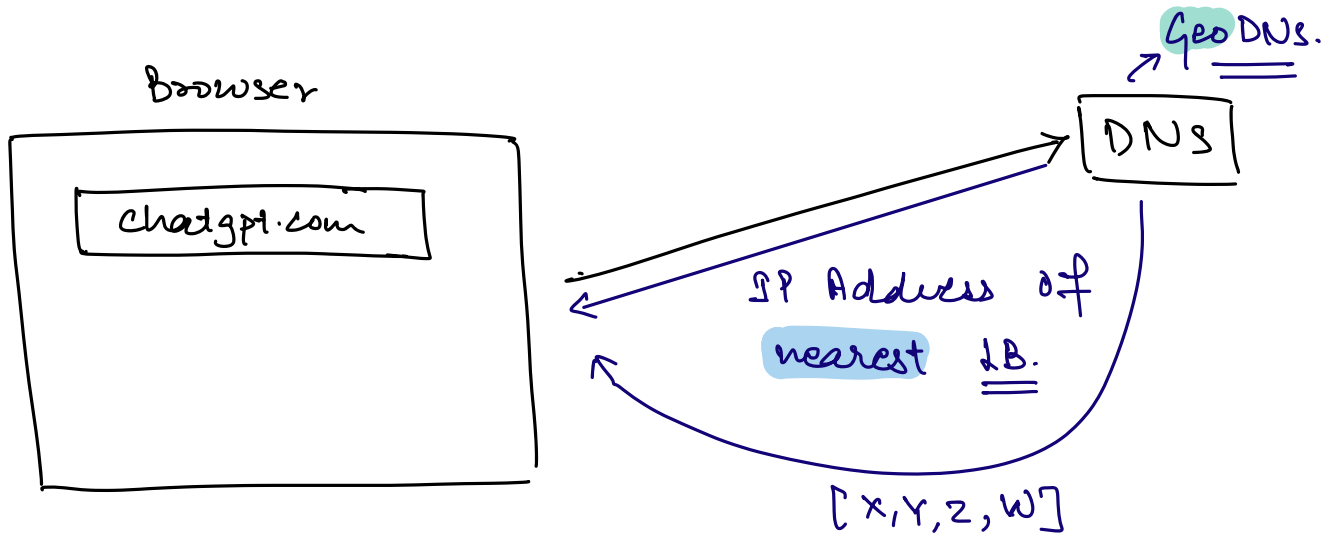


# If we are storing some data within each server the LB needs to make sure that all the requests from a user goes to the same server always.

→ Stateful Load Balancing


↓  
Data.

# Stateless LB.

→ LB can route the requests randomly to any server.

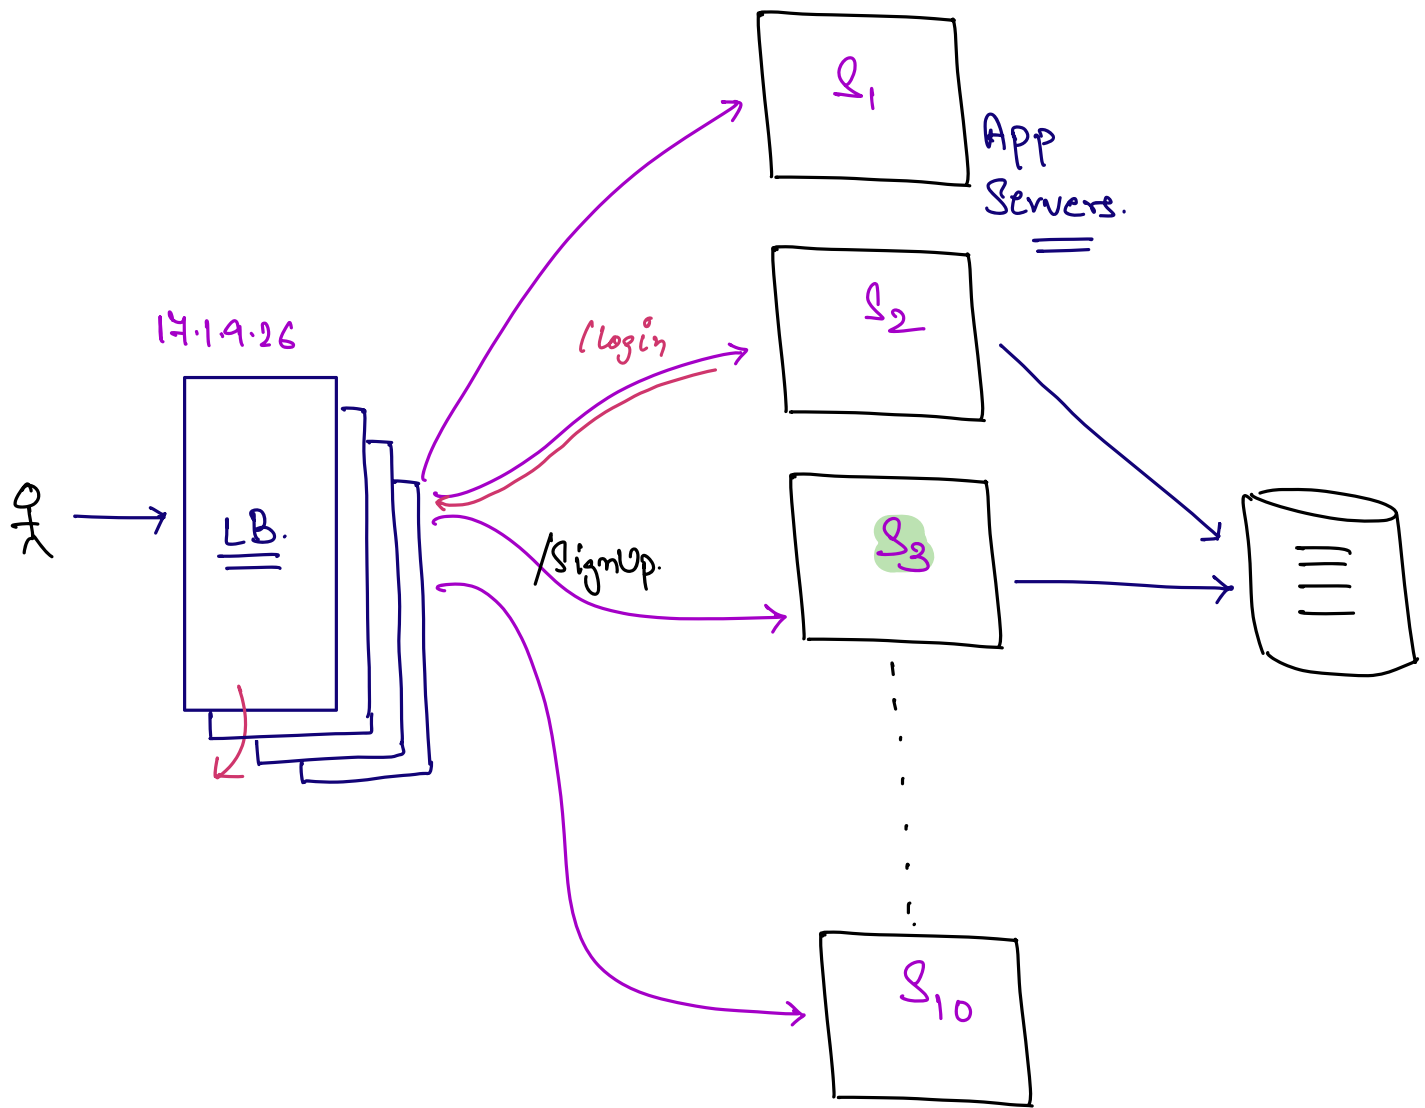

ChatGPT

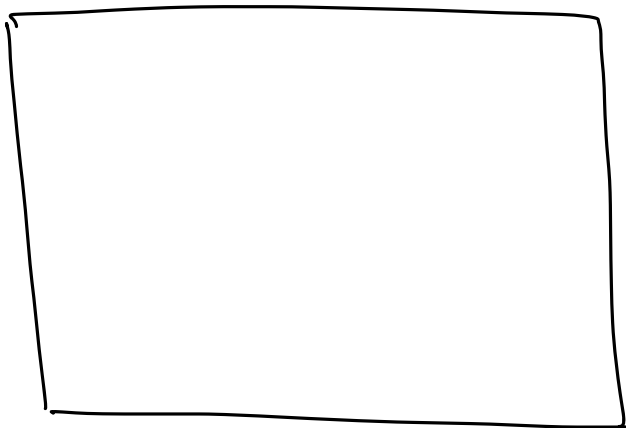

# Stateless Load Balancers are easier to maintain than Stateful Load Balancers

