


→ Normal LLM call is stateless.

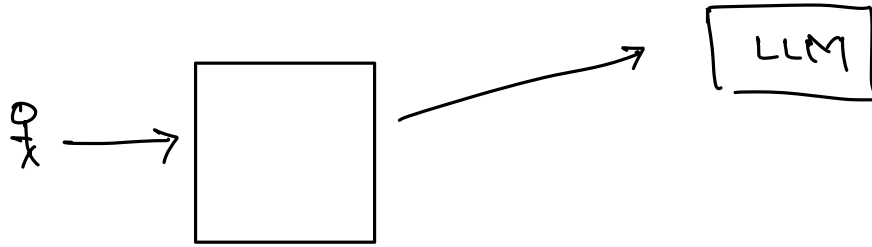

Q1: This is my order Id: 1234


A1: —

Q2: Track it.


Stateless Vs Stateful.

Client

Server

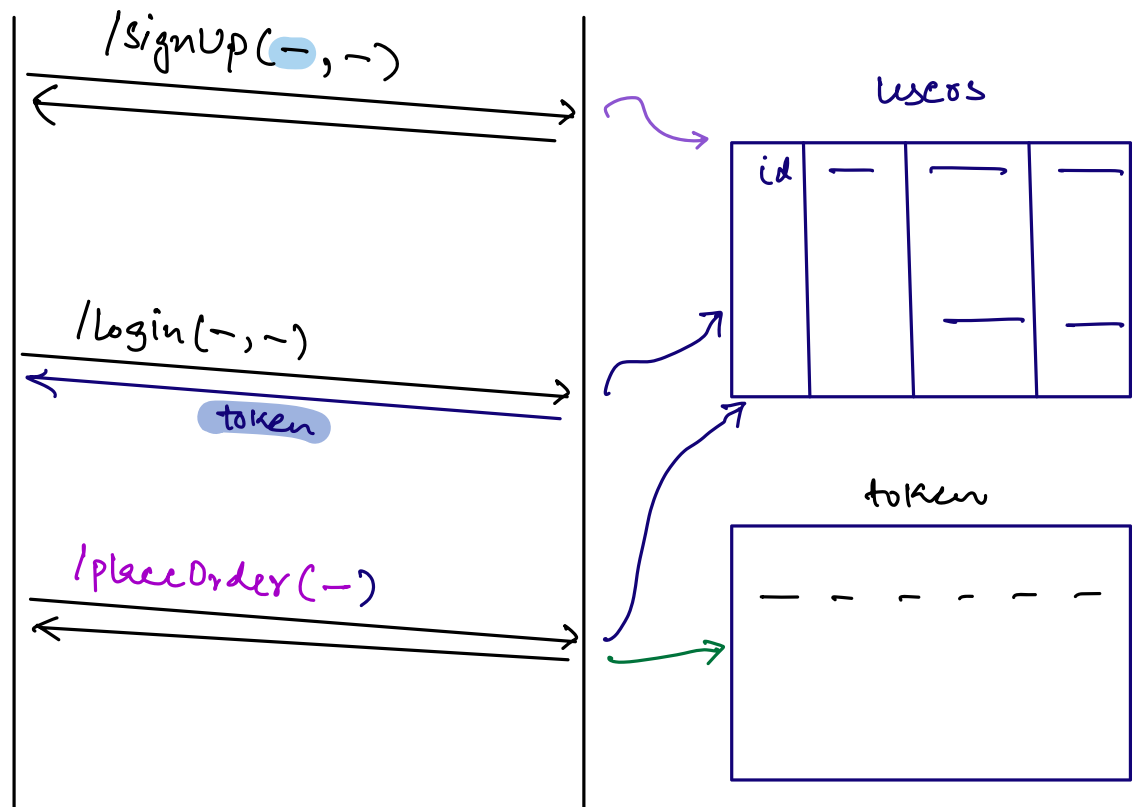


→ Every HTTP req. is stateless.

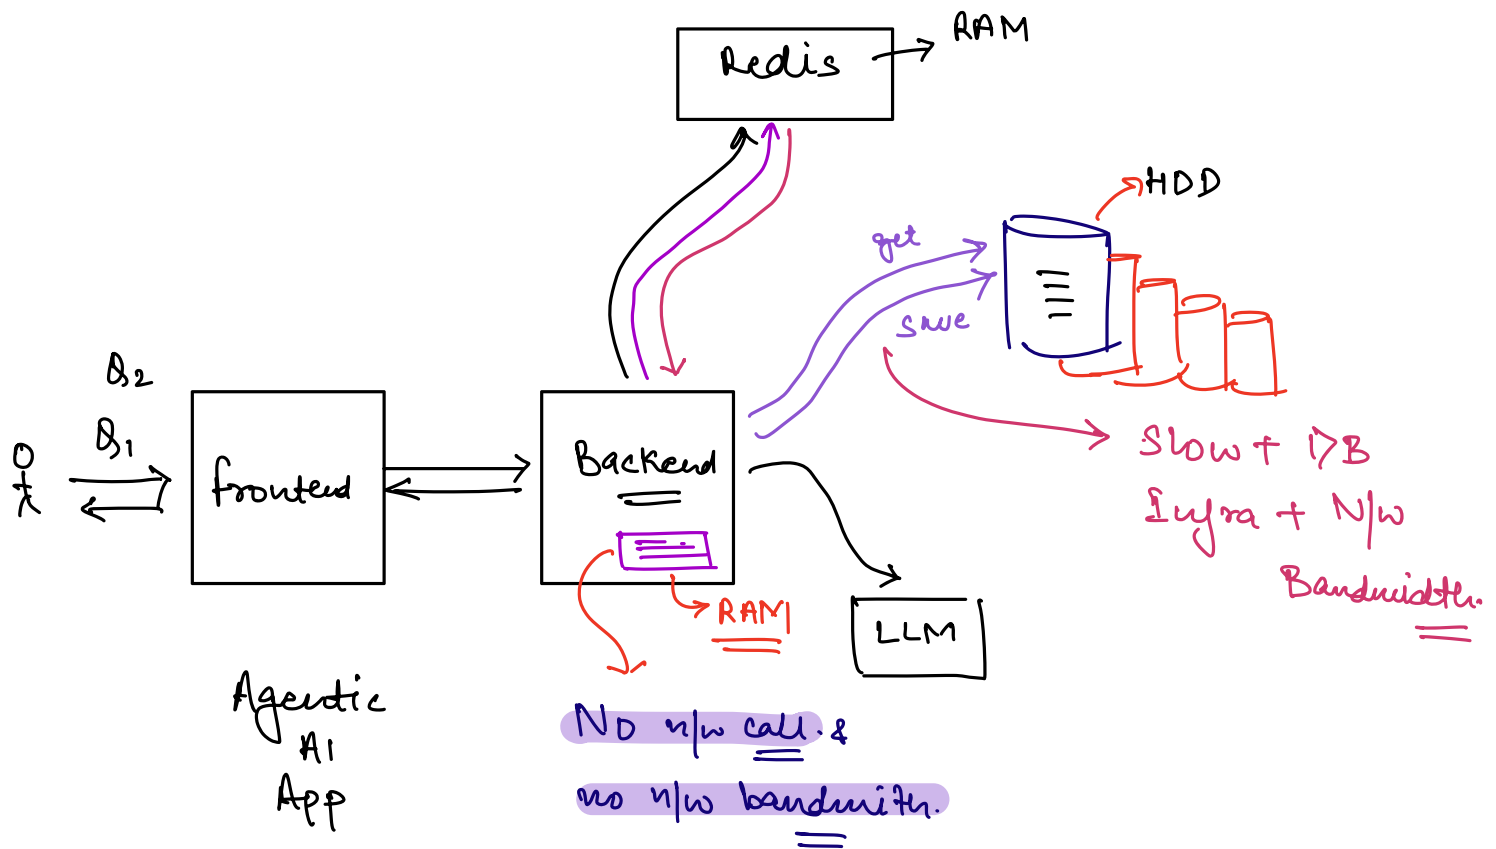


Redis
↓
In-Memory K-V
Data structure.
+
Optional persistence

Cache Eviction Strategy
↳ TTL: Time to live

< Cache HIT
Cache MISS

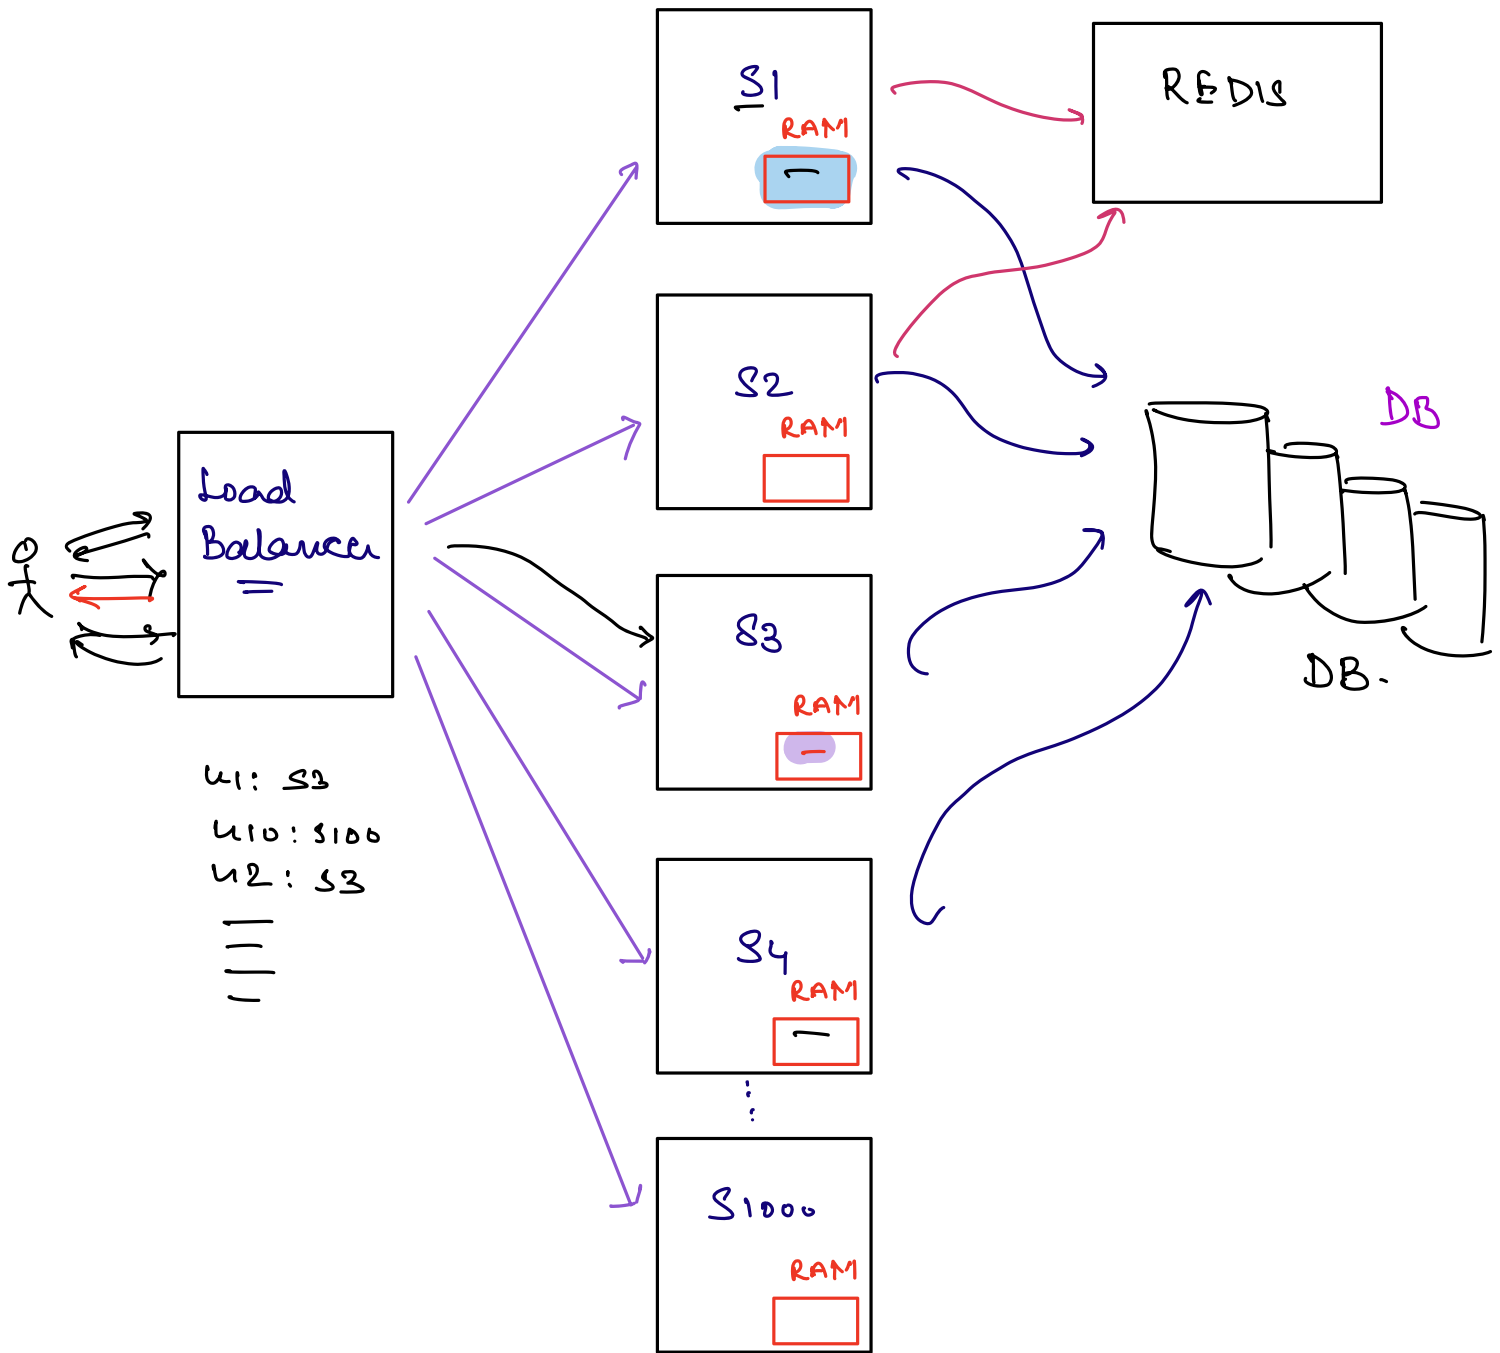

Routing Algorithms.
├── Stateful
│ └── Consistent Hashing Algo.
└── Stateless.
 └── Randomly

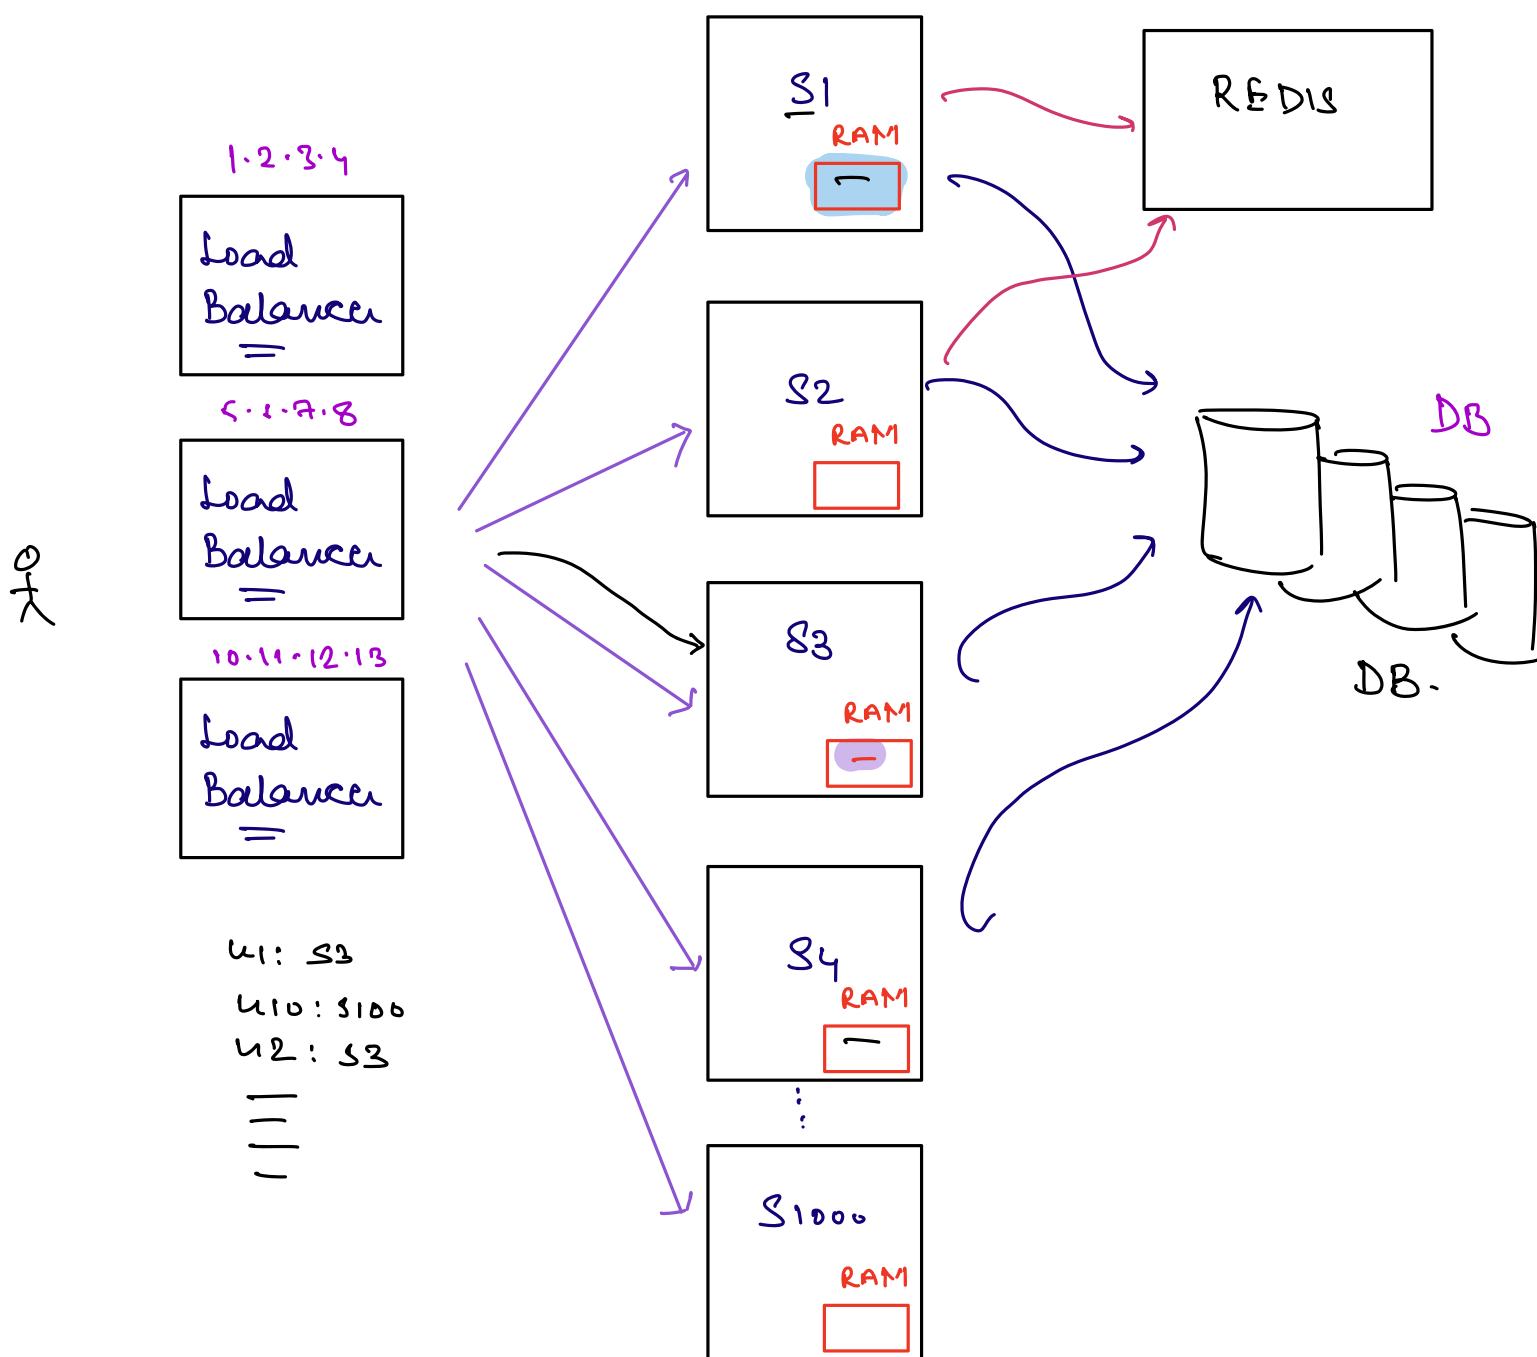

DNS

Chat4pt.com : [1.2.3.4, 5.6.7.8, 10.11.12.13]

GeoDNS.