


→ Client - Server Architecture

→ Request Response Cycle.

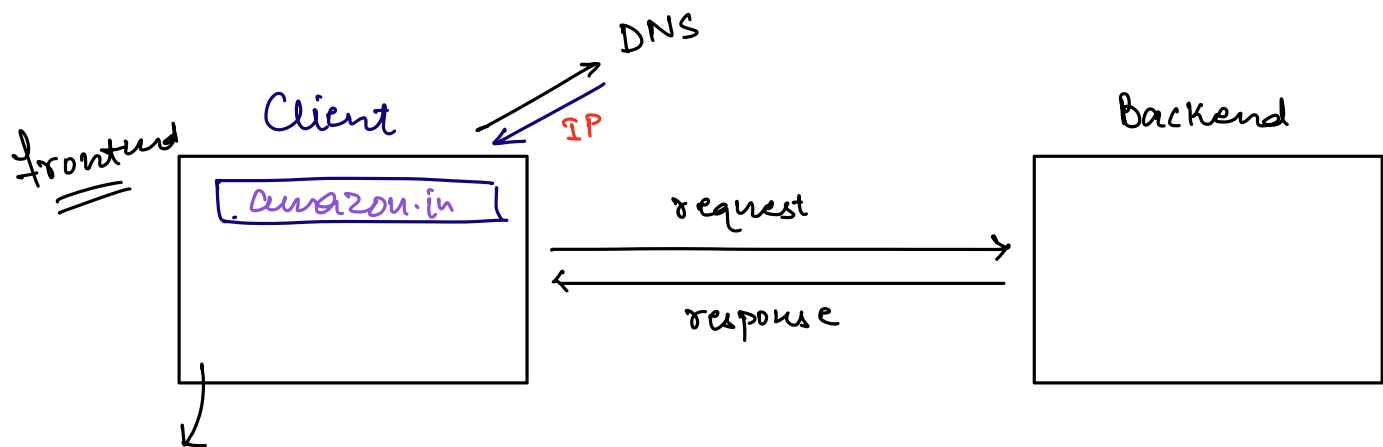

Browser **Cache**

↳ Stores the IP addresses of some commonly used website.

Cache HIT
Cache Miss

amazon.in | **search** ? q = iphone

API



/placeOrder

/trackOrder

/cancel

/addMoney

—
—
—
—
—

API : Application Programming Interface.

→ functionality exposed by the backend server which frontend can call & get the response back.

/orders / 1234

↓
Path param.

/orders ? id=1234

↓
Query param.

C : Create

R : Read

U : Update

D : Delete.

HTTP Methods.

→ GET : Reading

→ POST : Create

→ PUT / PATCH : Update

→ DELETE

Patch Method

! → Partial Update.

Put Method

↳ Replace.

HTTP Status Codes.

→ 200 : OK

→ 404 : Not found

→ 500 : Bad q/w.

2xx : Success

4xx : Client's Error

5xx : Server

CSS

↳ Cascading Style Sheet

3 ways to write CSS.

1) Inline

2) Internal

3) External

Priority Order : Inline > Internal > External.